
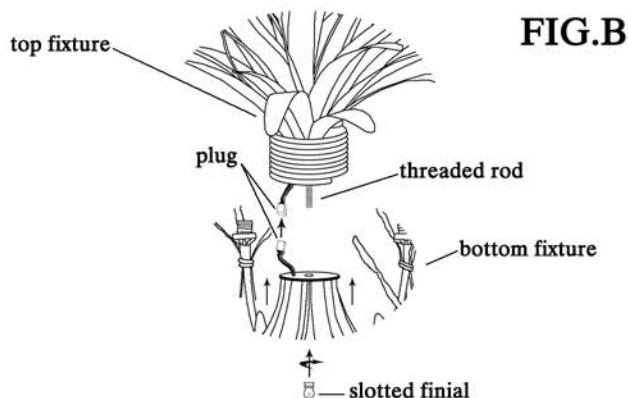


# ASSEMBLY INSTRUCTIONS FOR #107852 (37411-1)

FIG.A

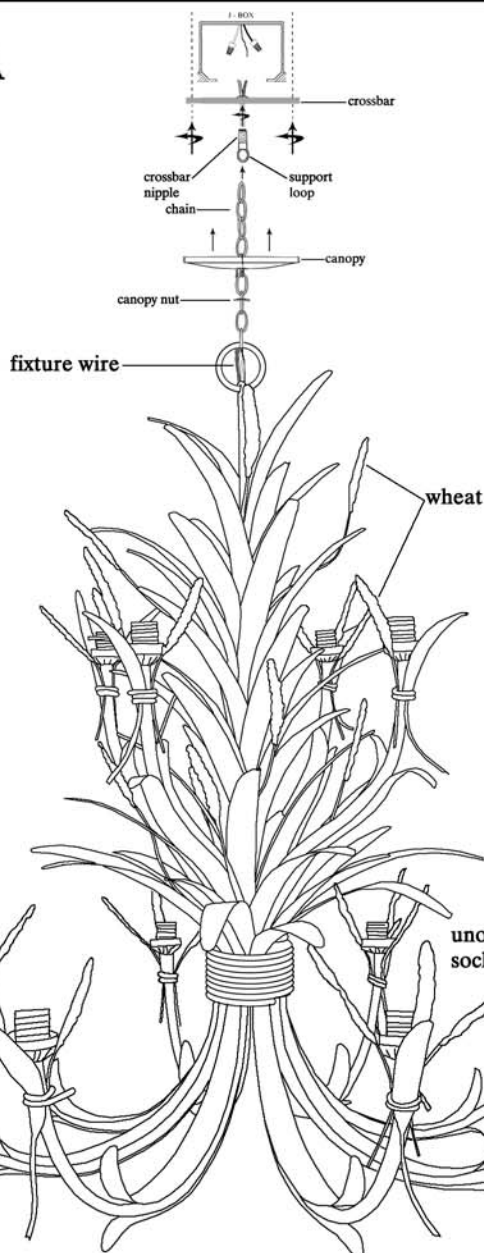

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

**CAUTION: DO NOT BEND WHEAT!**

1. Plug bottom fixture into top fixture as shown. FIG.B
2. Place bottom fixture up and onto threaded rod, screw slotted finial onto threaded rod and tighten to top fixture with flat head screw driver. FIG.B
3. Attach crossbar as described in NEC: paragraph above.
4. Screw support loop into crossbar, attach chain to fixture loop, place canopy nut onto chain, place canopy onto chain, attach chain to support loop. FIG.A
5. Place fixture wire through chain, canopy nut, canopy and support loop. FIG.A
6. Wire as per local electrical code.
7. Place canopy up to ceiling, screw canopy nut onto support loop. FIG.A
8. Place shade onto uno socket, screw uno ring onto uno socket and tighten to shade. FIG.A



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)