


ASSEMBLY INSTRUCTIONS FOR #38465 (M90-SG652-1)

*** THIS IS A TWO PERSON JOB ***

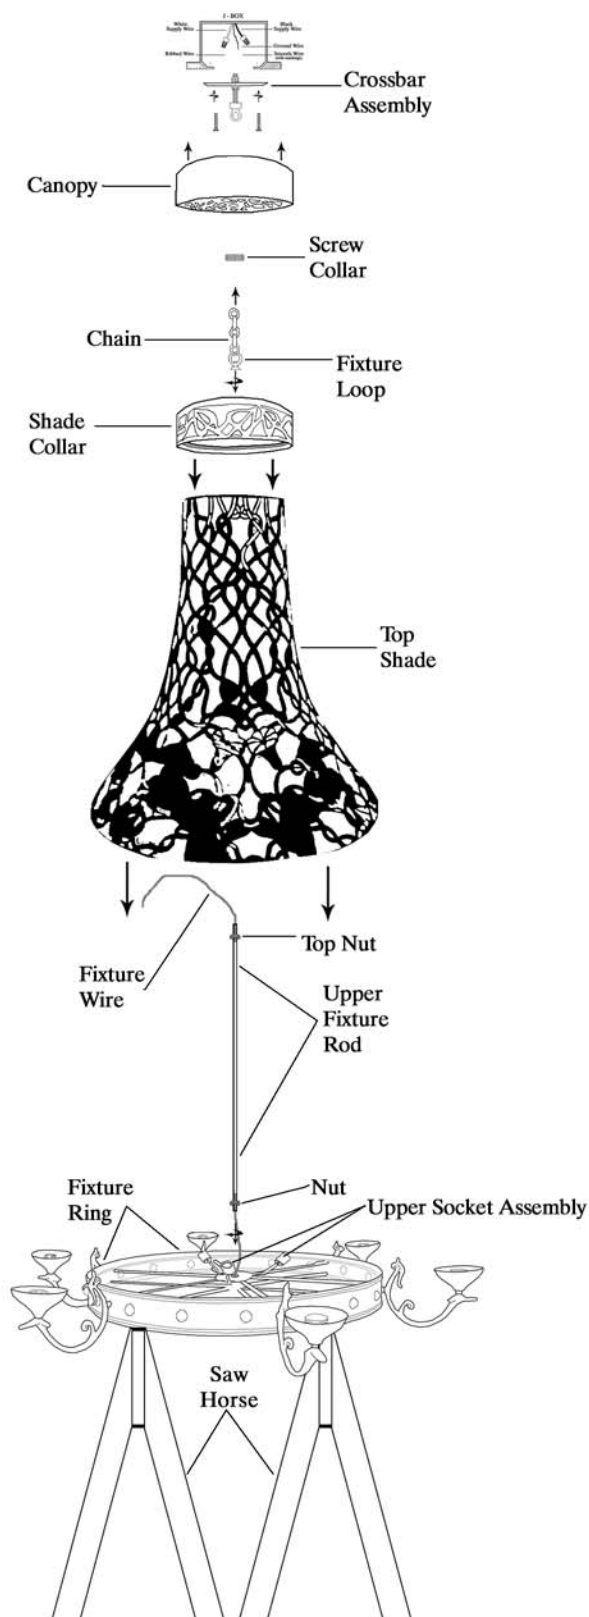

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

For ease of assembly place fixture ring onto sawhorses or suitable support. Make sure there is sufficient room for bottom light bulb cluster.

This Is a two person job.

1. Thread fixture wire through upper fixture rod, screw upper fixture rod into top center of fixture ring, tighten nut to fixture ring.
2. Place top shade over upper fixture rod and seat to fixture ring.
3. Place shade collar onto top of shade, make sure upper fixture rod and wires fit through hole on top of shade collar. Tighten top nut to bottom of shade collar.
4. Screw fixture loop onto upper fixture rod & tighten to shade collar
5. Attach crossbar assembly to j-box, attach chain to fixture loop, place screw collar onto chain, place canopy onto chain, attach chain to crossbar assembly.
6. Wire to j-box as per local electrical code.
7. Place canopy to ceiling, attach screw collar to crossbar assembly and tighten to canopy.
8. Place light bulbs into upper socket assembly.




"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com

ASSEMBLY INSTRUCTIONS FOR #38465 (M90-SG652-1)

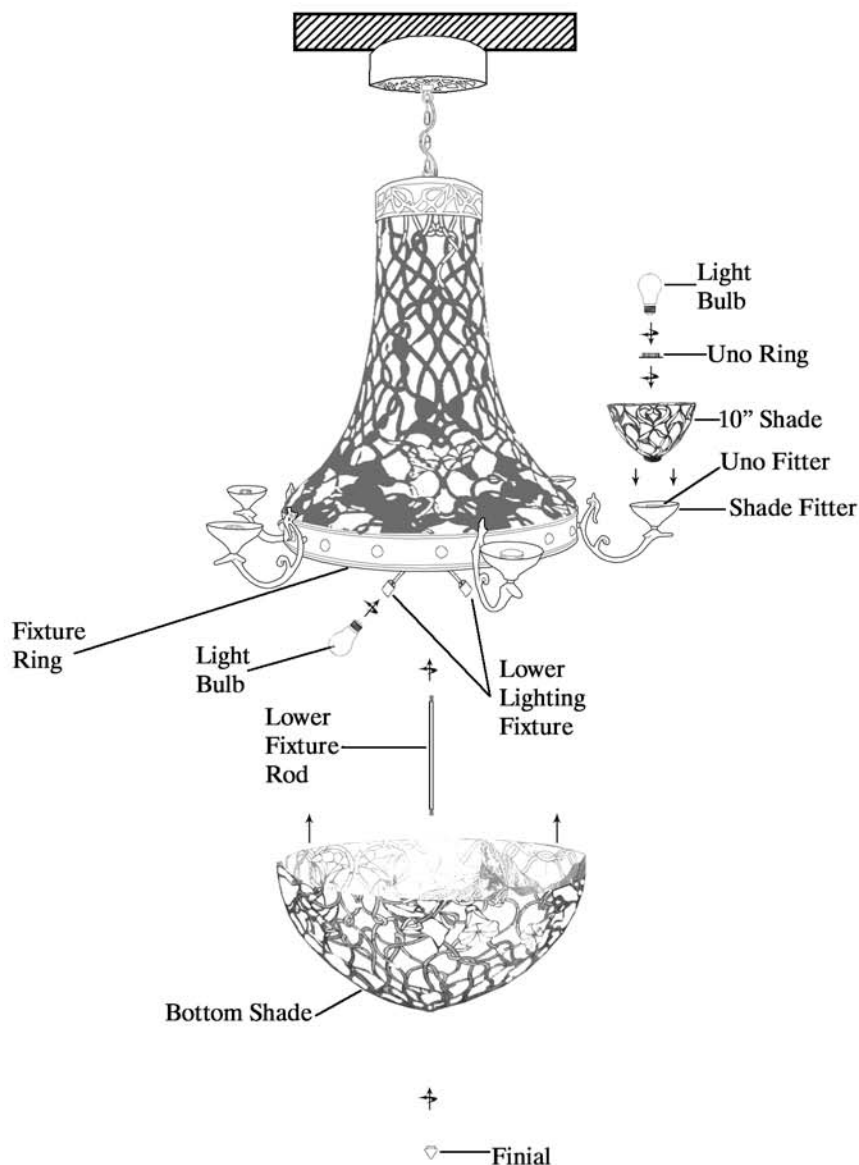

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Place light bulbs into lower lighting fixture.
2. Screw lower fixture rod into bottom of fixture ring.
3. Place bottom shade up and seated to bottom fixture ring channel. Make sure enough thread appears through vase cap so that finial can be screwed onto lower fixture rod approx. 5 turns.
4. Screw finial onto lower fixture rod and tighten to shade.
5. Place 10" shade onto shade fitter as shown.
6. Screw uno ring onto uno fitter and tighten to shade.
7. Repeat steps 5 & 6 for remaining 10" shades. Screw light bulbs into all sockets, turn on power to j-box and ENJOY!



"A Commitment to Excellence in Lighting and Service"


CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009



MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com

CUT SHEET, ITEM #38465

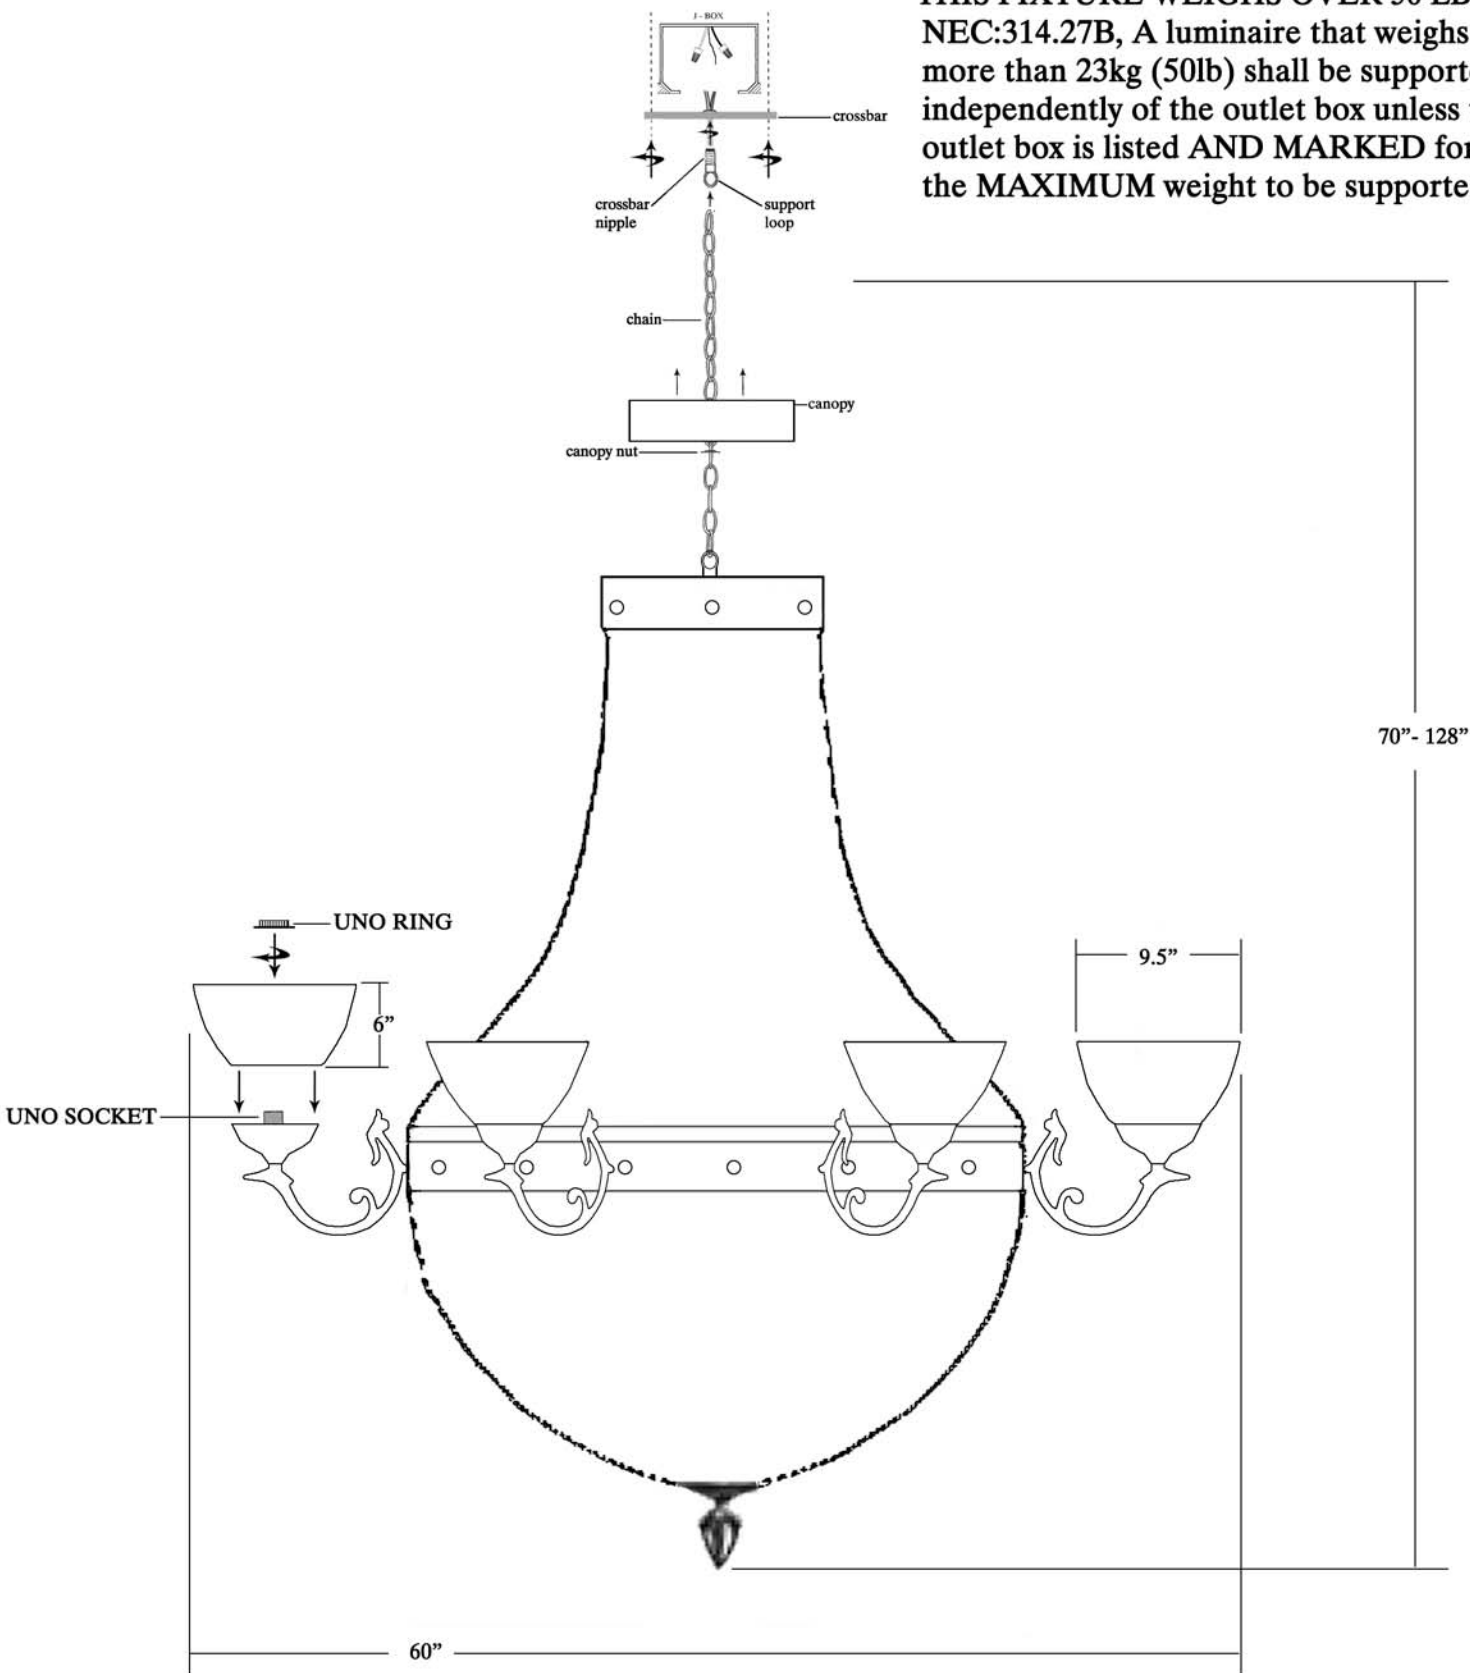THIS FIXTURE WEIGHS OVER 50 LBS.
NEC:314.27B, A luminaire that weighs
more than 23kg (50lb) shall be supported
independently of the outlet box unless the
outlet box is listed AND MARKED for
the MAXIMUM weight to be supported.



 	DRAWN BY 244	WEIGHT 110 LBS	DATE 5/1/09	© MEYDA TIFFANY, INC. © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION			
	VOLTAGE 110	GLASS COLOR		BULB # 13	DESCRIPTION 60"W GRAND TULIP MEDALLION 6 ARM CHANDELIER		PROJECT NUMBER
	FINISH CRAFTSMAN BROWN			TYPE MEDIUM BASE			DESIGN NUMBER M90-SG652-1
	MATERIAL GLASS/STEEL			WATT 60	FIXTURE TYPE CHANDELIER		FINAL MODEL NUMBER 38465