


ASSEMBLY INSTRUCTIONS FOR #114882

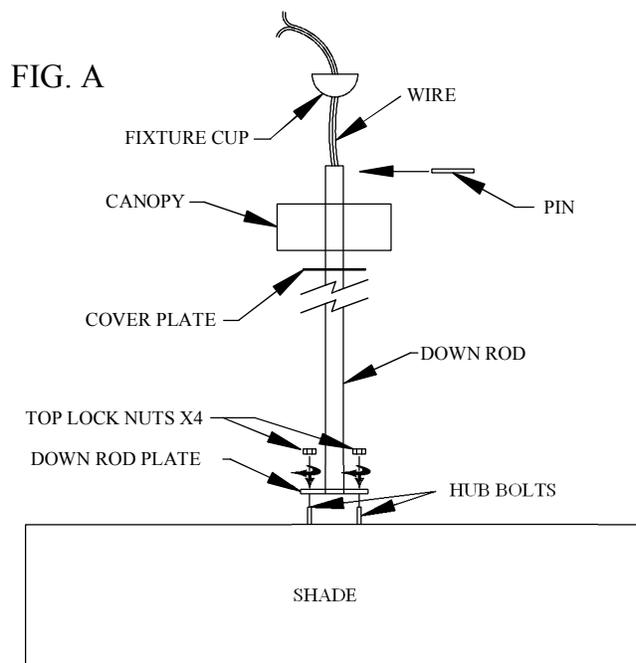

IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX BEFORE STARTING
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE NOT
INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS.
NEC:314.27B, A luminaire that weighs more than 23kg
(50lb) shall be supported independently of the outlet
box unless the outlet box is listed AND MARKED for
the MAXIMUM weight supported.

THIS IS A TWO PERSON JOB


- 1.) ATTACH FIXTURE CUP HOLDER TO A SECURE
LOCATION USEING FASTENERS SUPPLIED BY
OTHERS. FIG. B
- 2.) FEED WIRES THROUGH DOWN ROD. PLACE
DOWN ROD PLATE ONTO HUB BOLTS (4) AND
TIGHTEN WITH LOCK NUTS PROVIDED FIG. A.

FOR SLANTED CEILING

- 3.) SLIDE CANOPY ONTO DOWN ROD FIG. A
- 4.) PLACE FIXTURE CUP ONTO DOWN ROD. INSERT
PIN INTO END OF DOWN ROD MAKING SURE PIN IS
CENTERED TO ENSURE PROPER SEATING INTO
FIXTURE CUP. FIG. A
- 5.) HANG FIXTURE BY SLIDING FIXTURE CUP
THROUGH SLOT IN FIXTURE CUP HOLDER. FIG. B
- 6.) WIRE AS PER LOCAL ELECTRICAL CODES.
- 7.) ATTACH CANOPY FASTENING WITH CANOPY
NUTS PROVIDED. FIG. C

FOR FLAT CEILING

- 8.) FEED WIRES THROUGH DOWN ROD. PLACE
DOWN ROD PLATE ONTO HUB BOLTS (4) AND
TIGHTEN WITH LOCK NUTS PROVIDED FIG. A.)
- 9.) SLIDE COVER PLATE THEN CANOPY OVER
DOWN ROD. FIG. A
- 10.) PLACE FIXTURE CUP ONTO DOWN ROD.
INSERT PIN INTO END OF DOWN ROD MAKING
SURE PIN IS CENTERED TO ENSURE PROPER
SEATING INTO FIXTURE CUP. FIG. A
- 11.) HANG FIXTURE BY SLIDING FIXTURE CUP
THROUGH SLOT IN FIXTURE CUP HOLDER. FIG. B
- 12.) WIRE AS PER LOCAL ELECTRICAL CODES.
- 13.) ATTACH CANOPY AND COVER PLATE,
FASTENING WITH CANOPY NUTS PROVIDED.
FIG. C.

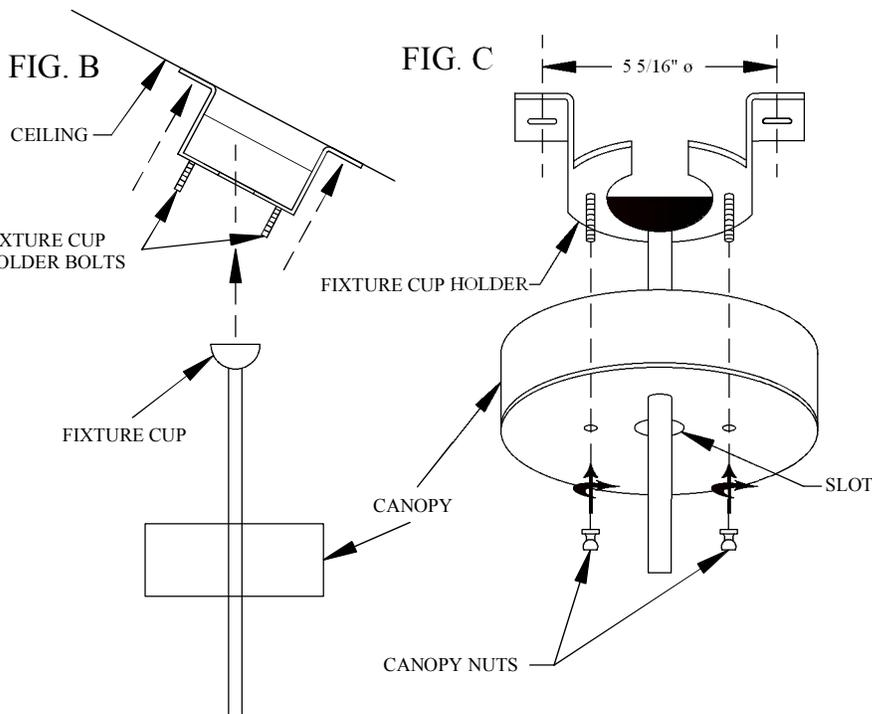

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com




specifications
"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-826-1602

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com

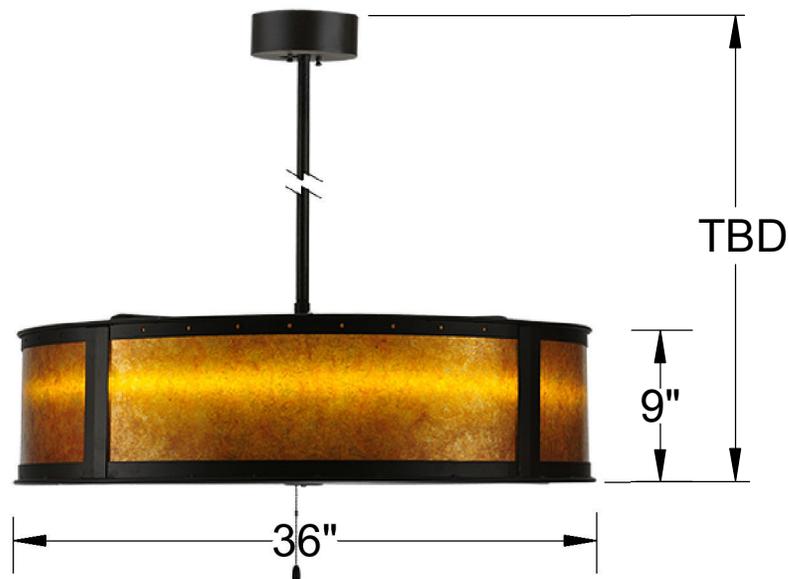

*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION
 © MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION



ITEM# 114822	EMP #	BULB# (2)	EMP #	LOCATION:	
DESIGN#	EMP #	TYPE: LED STRIPS	EMP #	RS	Date: 06/22/2012
FIXTURE TYPE: CHANDEL-AIR	EMP #	WATT:	EMP #	DIMENSIONS/NOTES:	
LENS COLOR: SILVER MICA (624421)	EMP #	VOLTAGE:	EMP #	APPROVAL	
FINISH: OIL RUBBED BRONZE	EMP #	MATERIAL: STEEL/MICA/PICCOLO FAN			WEIGHT:

Fan Specifications

Integrating the best of both worlds, Chanlel-Air incorporates custom lighting design with fan technologies. Form and function presented beautifully. Designed for ceilings of any pitch or height. Dimming capabilities included. Fan specifications listed below.

Features


- Standard, 3 Speed Reversible motor
- 2" and 6" Down rods (included)
- 30 year limited warranty
- Custom 29" Piccolo Blades Sold Separately
- Light Kit Adaptable (optional)
- Universal Control Adaptable (UC-2000) (Optional)
- Great for Small Spaces

* Compare, 36" to 48" ceiling fans have airflow efficiencies ranging from approximately 71 to 86 cubic feet per minute per watt at high speed

Specs

Blade Sweep	29"
Number of Blades	5
Blade Pitch	25"
Motor Size (MM)	153 x 8
AMPS (Hi Speed)	0.4
Watts (Hi Speed)	46
RPM (HI-MED-LOW)	200-120-55
Shipping Wt. (lbs.)	13.71
CU. FT in Carton	1
Airflow*	2,287 (Cubic Feet Per Minute)
Airflow Efficiency*	50 (Cubic Feet Per Minute Per Watt)

Ceiling Drop Dimensions

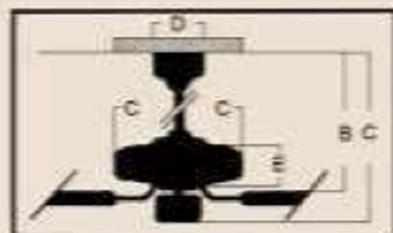

A: 2" DR - 10.25"	B: 2" DR - 8.0"
A: 6" DR - 14.25"	B: 6" DR - 12.0"
C: 9.0"	D: 5.875"
E: 3.25"	

DR: Down rod

Available Finishes



AW-Antique White



BN-Brushed Nickel



OB-Oiled Bronze



W-White

Blade Options

Model Specific: Available in AW (Antique White), BN (Brushed Nickel), DOK (Dark Oak), LOK (Light Oak), OB (Oiled Bronze) and W (White)

Remotes (optional)

Universal Remote Control System with Receiver



UC-2000.W

*remote control units may vary