


ASSEMBLY INSTRUCTIONS FOR # 04-1031-10

Side View

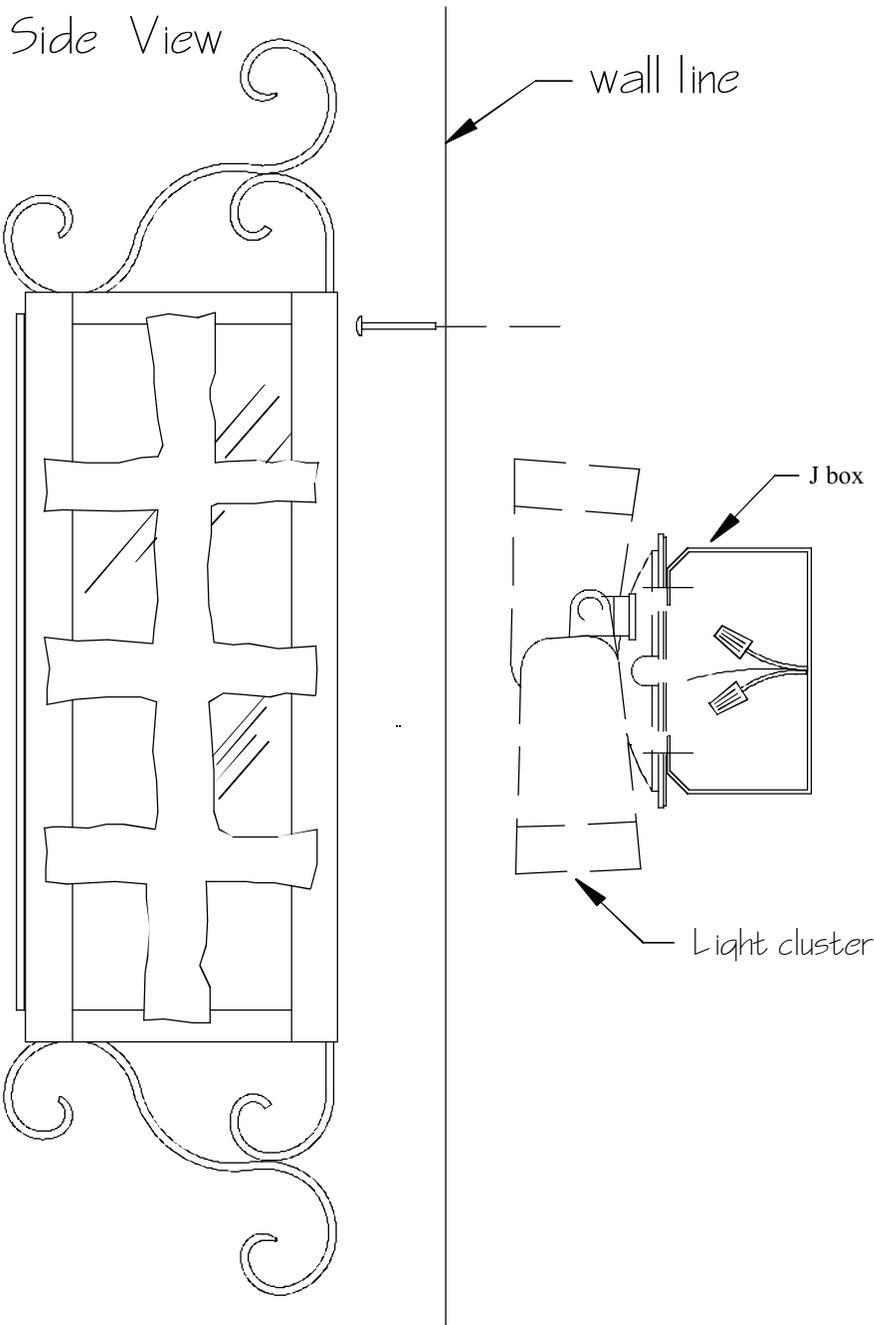

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Center fixture to J box and level.
- 2.) Mark in grooves of both keyholes located at the top of the fixture while holding firmly against wall.
- 3.) Drill 2 holes at marks for appropriate fasteners (supplied by others).
- 3.) Install and tighten both fasteners so that there is a space of apx. 1/8" between head of fastener and wall.
- 4.) Wire new light cluster to local electrical code.
- 6.) Mount light cluster with bulbs pointing up and down and fasten to crossbar with provided screws.
- 7.) Line up fixture mounting holes with installed fasteners, place against wall and firmly push down.
- 8.) Finish tighten mounting screws through top opening in fixture.
- 9.) Install 2 MR 16 50 watt bulbs.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com