
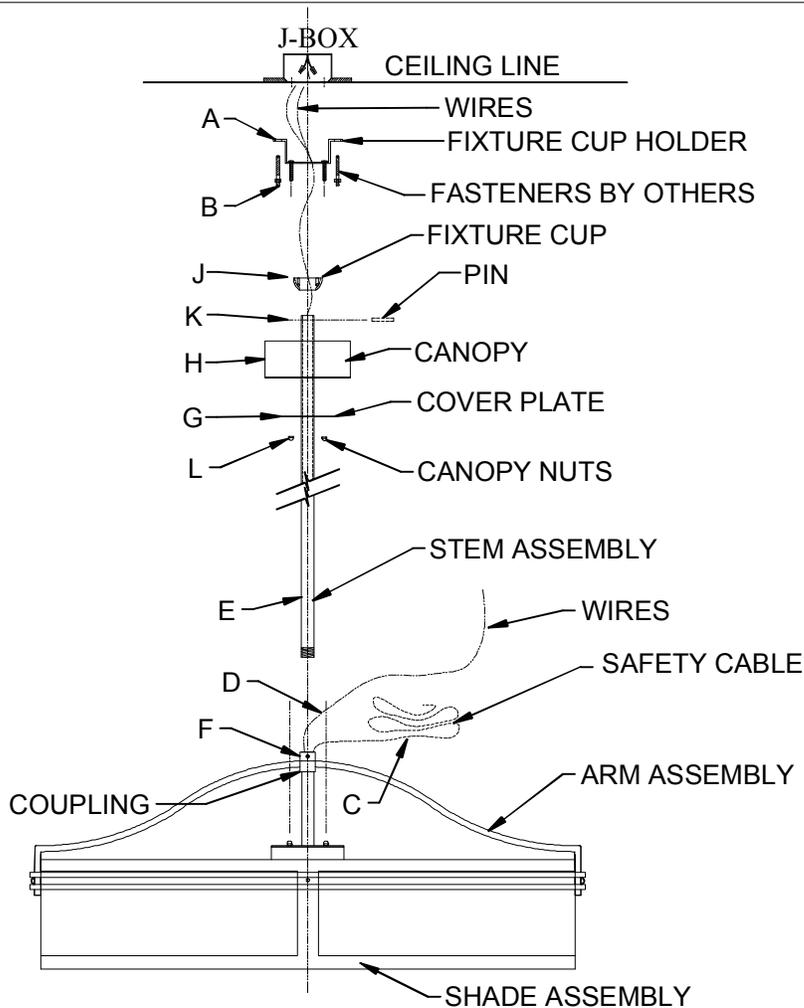


ASSEMBLY INSTRUCTIONS FOR #153397

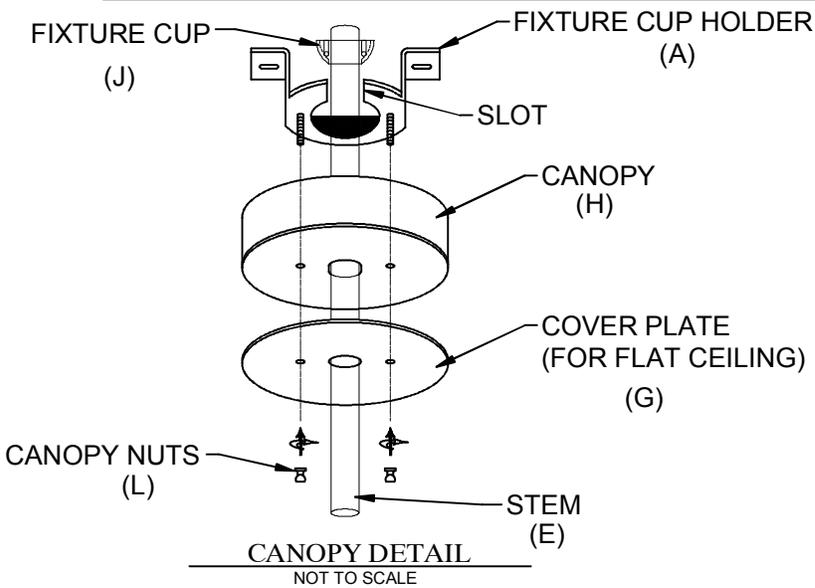

SIDE VIEW

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight supported.

THIS IS A TWO PERSON JOB

- 1) ATTACH FIXTURE CUP HOLDER (A) TO CEILING WITH FASTENERS (B) PROVIDED BY OTHERS.
- 2) FEED WIRES & SAFETY CABLE THROUGH STEM (E) THEN SCREW STEM ONTO COUPLING (F) AND SECURE IN PLACE WITH SET SCREW PROVIDED.
- 4) SLIDE COVER PLATE (G) ONTO STEM (E) - FOR FLAT CEILING ONLY !
- 5) SLIDE CANOPY (H) ONTO STEM (E).
- 6) PLACE FIXTURE CUP (J) ONTO STEM (E) AND SECURE IN PLACE WITH PIN (K), MAKING SURE THAT PIN IS CENTERED AND SEATED IN CUP.
- 7) HANG FIXTURE BY SLIDING FIXTURE CUP (J) ONTO SLOT IN FIXTURE CUP HOLDER (A).
- 8) WIRE AS PER LOCAL ELECTRICAL CODES.
- 9) FASTEN SAFETY CABLE (C) TO SECURE LOCATION WITH HARDWARE PROVIDED.
- 10) SLIDE CANOPY (H) AND COVER PLATE (G) - IF REQUIRED - UP STEM TO CEILING AND SECURE IN PLACE WITH CANOPY NUTS (L) PROVIDED.
- 11) INSTALL LAMPING (BULBS). BULBS PROVIDED BY OTHERS.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com