


# ASSEMBLY INSTRUCTIONS FOR #152445

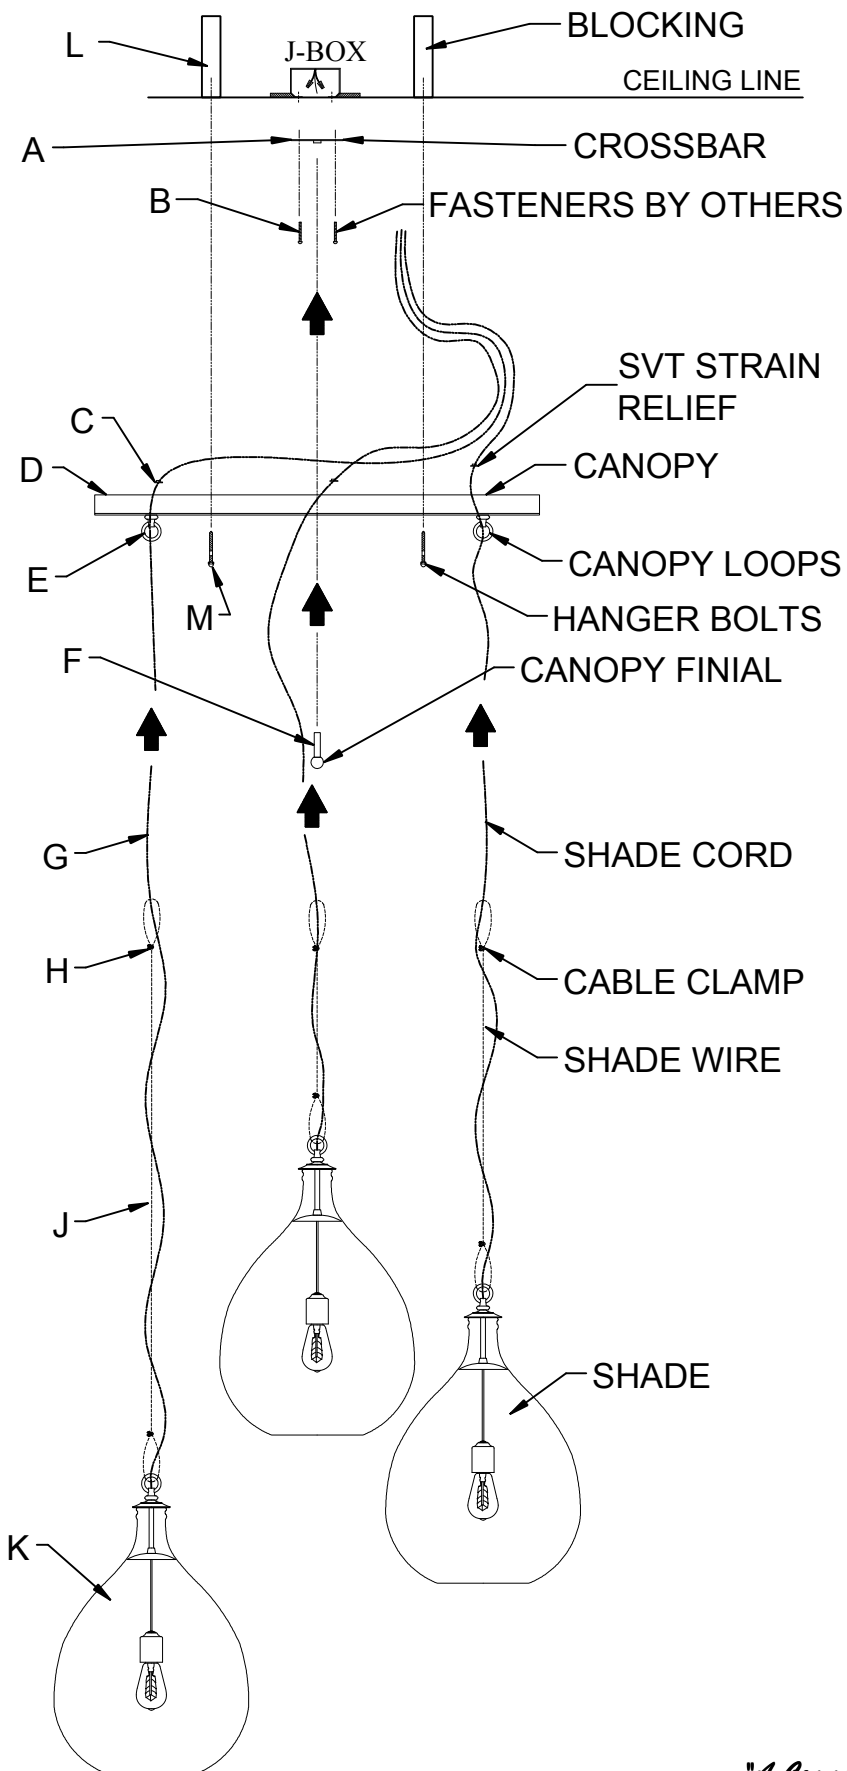

## SIDE VIEW

### IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

### THIS IS A TWO PERSON JOB

THIS FIXTURE WEIGHS OVER 50 LBS.  
 NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight supported.

- 1) ATTACH CROSS BAR (A) TO CEILING WITH FASTENERS (B) PROVIDED BY OTHERS.
- 2) ADJUST SHADE WIRES (J) TO DESIRED LENGTHS.
- 3) THREAD SHADE CORD (G) AROUND SHADE WIRE (J) & THROUGH CANOPY LOOPS (E).
- 4) SECURE SHADE CORD IN PLACE ABOVE CANOPY (D) WITH SVT STRAIN RELIEFS (C).
- 5) MAKE ELECTRICAL CONNECTION AT J BOX PER LOCAL ELECTRICAL CODE.
- 6) SECURE CANOPY (D) TO CEILING WITH CANOPY FINIAL (F).
- 7) DRILL HOLES IN CANOPY (D) TO ACCEPT HANGER BOLTS (M) PROVIDED, ALIGNED WITH SUPPORT BLOCKING (L) IN CEILING, BY OTHERS.
- 8) INSTALL LAMPING (BULBS). BULBS PROVIDED BY OTHERS.

*"A Commitment to Excellence in Lighting and Service"*  
 CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-843-1602  
 MONDAY - FRIDAY 8:00a.m - 6:00p.m ET  
 visit us on the web at [www.2ndave.com](http://www.2ndave.com)

