


ASSEMBLY INSTRUCTIONS FOR #153402

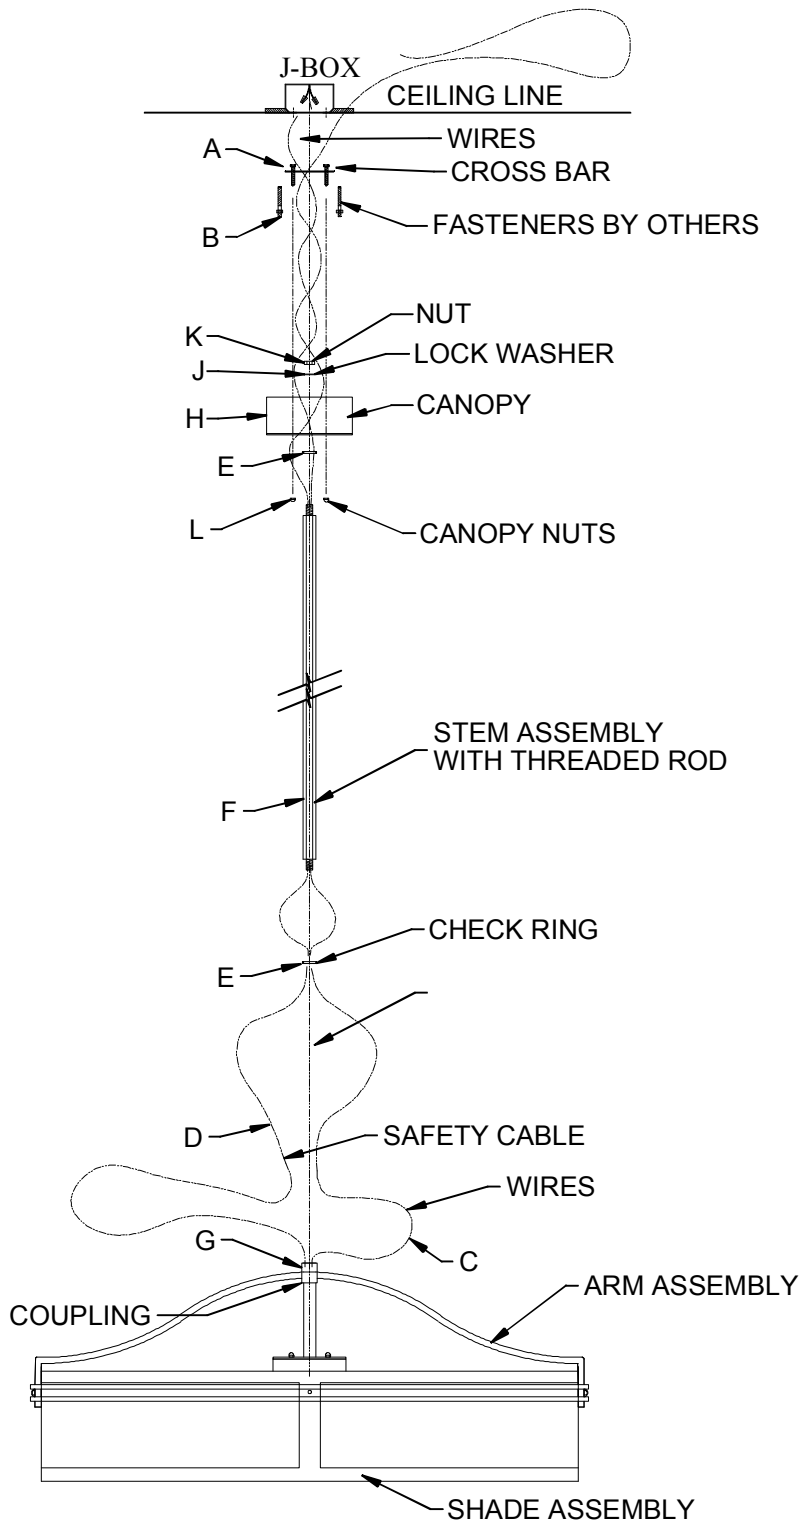

SIDE VIEW

IMPORTANT


TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight supported.

THIS IS A TWO PERSON JOB

- 1) ATTACH CROSS BAR (A) TO SECURE LOCATION WITH FASTENERS (B) PROVIDED BY OTHERS.
- 2) THREAD WIRES (C) & SAFETY CABLE (D) THROUGH CHECK RINGS (E) & STEM ASSEMBLY (F).
- 3) SCREW BOTTOM OF THREADED ROD ON STEM ASSEMBLY (F) INTO COUPLING (G) ON TOP SIDE OF SHADE ASSEMBLY CENTERING CHECK RING (E) ON STEM (F).
- 4) THREAD WIRES THROUGH CANOPY (H), LOCK WASHER (J) & NUT (K).
- 5) SLIDE CANOPY (H) ONTO STEM ASSEMBLY (F) CENTERING STEM ON CHECK RING (E).
- 6) SECURE CANOPY (H) ONTO STEM (F) WITH LOCK WASHER (J) & NUT (K).
- 7) FASTEN SAFETY CABLE (C) TO SECURE LOCATION WITH HARDWARE PROVIDED.
- 8) WIRE AS PER LOCAL ELECTRICAL CODE.
- 9) RAISE FIXTURE TO CEILING AND SECURE IN PLACE WITH CANOPY NUTS (L) PROVIDED.
- 10) INSTALL LAMPING (BULBS). BULBS PROVIDED BY OTHERS.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com