

ASSEMBLY INSTRUCTIONS FOR #165941

Fig.1

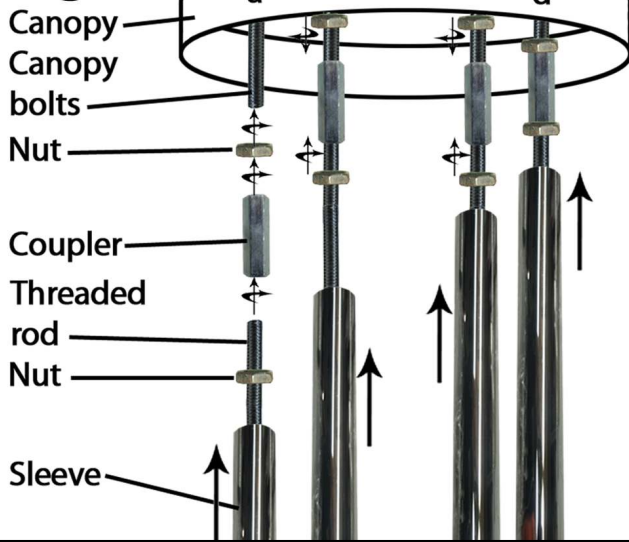


Fig.3

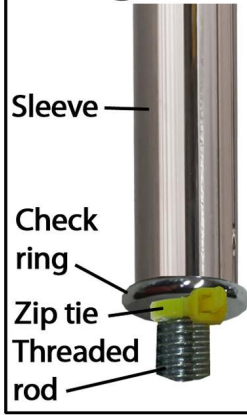


Fig.2

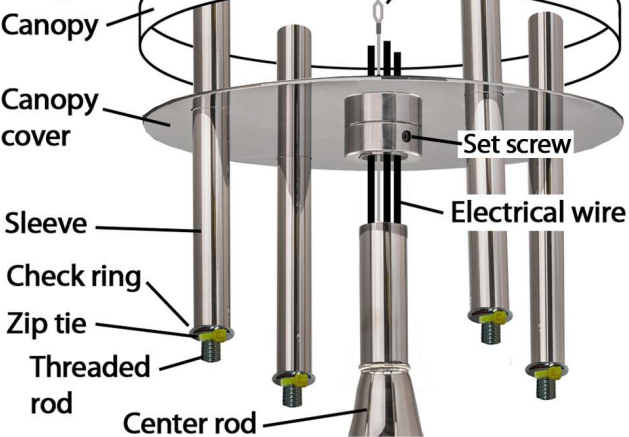


Fig.4

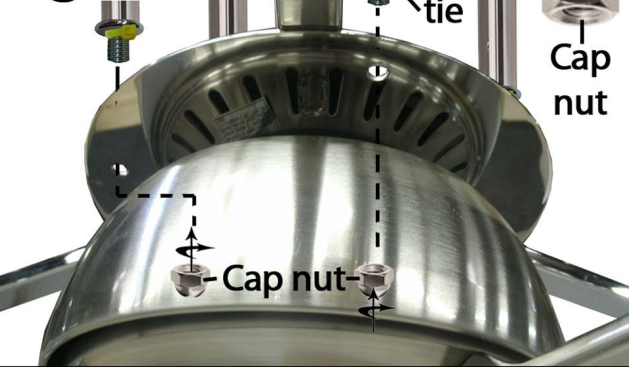


Fig.5



IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.)Screw nuts onto bolts protruding down from ceiling canopy. (canopy provided by others) Follow that with couplers, leave room inside coupler to receive threaded rod. Before screwing threaded rod into couplers screw a nut onto each rod.(Fig.1(a) Once all rods' are screwed into couplers, screw bottom nut in towards coupler. Do the same for the top nuts, make it tight.(Fig.1(b&c)
- 2.)Slide at least two of the sleeves (opposite of each other) through the canopy cover. Place the sleeves with canopy cover up onto threaded rods and place check rings on the end of the sleeves. Zip your zip ties onto the threaded rod to hold sleeve in place. Slide your other two sleeves onto remaining threaded rods, & through the canopy cover. Finish these as you did the first two w/check rings & zip ties. The canopy cover may slide down and rest on check rings.(Fig.2)
- 3.)Feed your electrical wires & safety cable, on top of fan, through the center rod. (Fig.2) On top of the fan where the wires protrude, there is three metal prongs, place your center rod over these prongs. (Fig.5) Bring fan w/center rod on top, to the four sleeves. Allow the center rod to penetrate the center of the canopy cover (electrical wires & safety cable first). (Fig.2) While holding fan in place, cut the zip ties off of threaded rod, and push fan up onto threaded rod. Secure in place with cap nuts provided. Apply lock tight to nuts.(Fig.4)
- 4.)Connect safety cable to secure location in ceiling. Connect all electrical wires as per your local codes.
 BLACK (thin) = Fan motor positive
 WHITE = Fan motor neutral
 BLUE = for optional Fan light, (not included)
 BLACK (wide spt) = LED Strip
 BROWN = LED Downlights
- 5.)Slide canopy cover up to canopy and secure into position by screwing set screw (5/32) into center rod.(Fig.2)
- 6.)Bulb your fixture, power on, enjoy!
- 7.)Have a Meyda Fine Day!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com