



NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

## ASSEMBLY INSTRUCTIONS FOR # 181898

### Fig.1

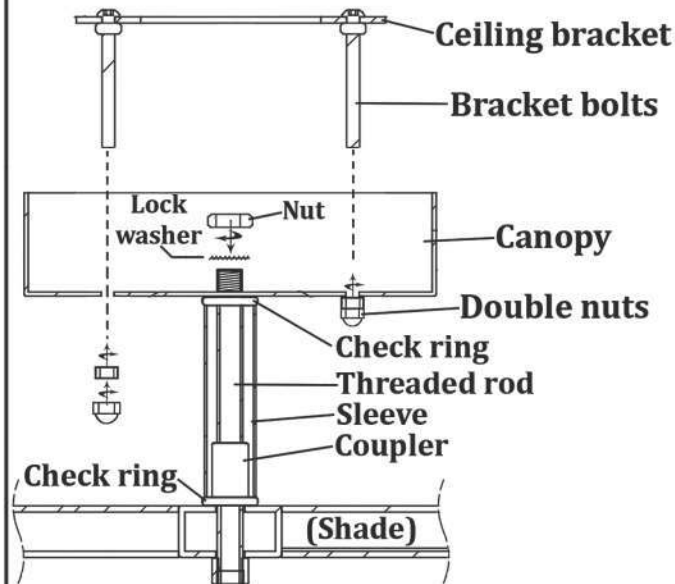

### Fig.2

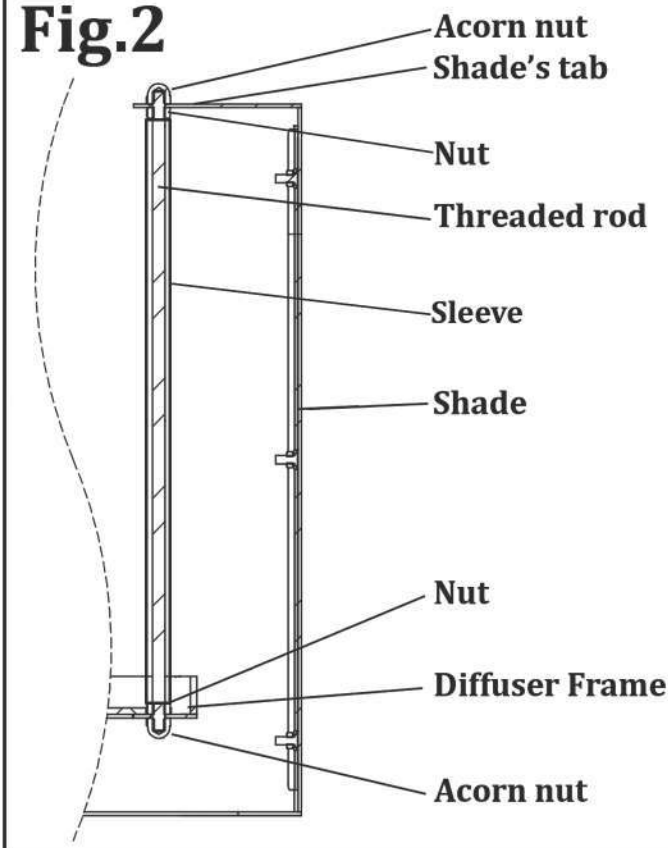

### IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR  
CIRCUIT BREAKER BOX BEFORE STARTING  
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL  
PARTS BEFORE ASSEMBLY. BULBS ARE NOT  
INCLUDED

- 1.) Attach your ceiling bracket to your ceiling. (100lbs. see warning above.) Be sure there is two bolts pointing down from bracket, ready to receive canopy. (Fig.1)
- 2.) Assemble your fixture: Above your shade there will be a coupler, there should be a check ring at base of coupler as seen in Fig.1. You will screw the threaded rod into the coupler. Slide sleeve over the rod so that it rests within the check ring at base of coupler. Top the sleeve off with another check ring, and allow the threaded rod to penetrate the center of canopy. Place onto the threaded rod a lock washer and then nut. Screw nut down tight. (Fig.1)
- 3.) You may connect diffuser frame before or after canopy is connected to ceiling. Skip step 3 if you want to connect diffuser after canopy is connected. Connect diffuser frame to shade: Around the top inside of shade there will be half circle tabs with a holes in them. You will screw a nut onto the top side of the threaded rods, less than an inch. Send top of threaded rod through the shade's tabs, (from below top of shade) and secure in place by screwing the acorn nut onto top of threaded rod. Now screw the top nut (under tab) up to meet tab. Slip the sleeve up onto the threaded rod. Screw your bottom nut onto the bottom of threaded rod. Repeat for rest of threaded rods. Lift diffuser frame to meet the lower nuts on threaded rods. Secure frame by screwing acorn nuts onto bottom of threaded rods. Screw bottom nut down to meet the frame. (Fig.2)
- 4.) Raise fixture to ceiling, & connect all electrical wires at the ceiling as per your local electrical code. Connect safety cable. Slide canopy up onto the two bracket bolts and secure canopy flush to ceiling by screwing the nuts provided onto the bracket bolts. (Fig.1) Execute Step 3 now, if you have not already.
- 5.) Place diffuser panels into diffuser frame sand-blasted side down.
- 6.) Bulb your fixture if not already. (Bulbs provided by others.)
- 7.) Power on, enjoy your new fixture!



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)

**Special Note: Upon arrival the shade may appear to have a deformity or dent, but this will straighten out once it is hung.**

## **CLEANING & CARE INSTRUCTIONS FOR # 181898**

---

**Due to the shipping, handling, and/or storage your fixture may need to be cleaned. Turn off the power supply to fixture before attempting to clean, service, or maintain. Do not use any detergents, use only a damp soft cloth to clean the acrylic & metal parts.**

---



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)