


ASSEMBLY INSTRUCTIONS FOR #113907 (30880-4) #113908 (30880-5)

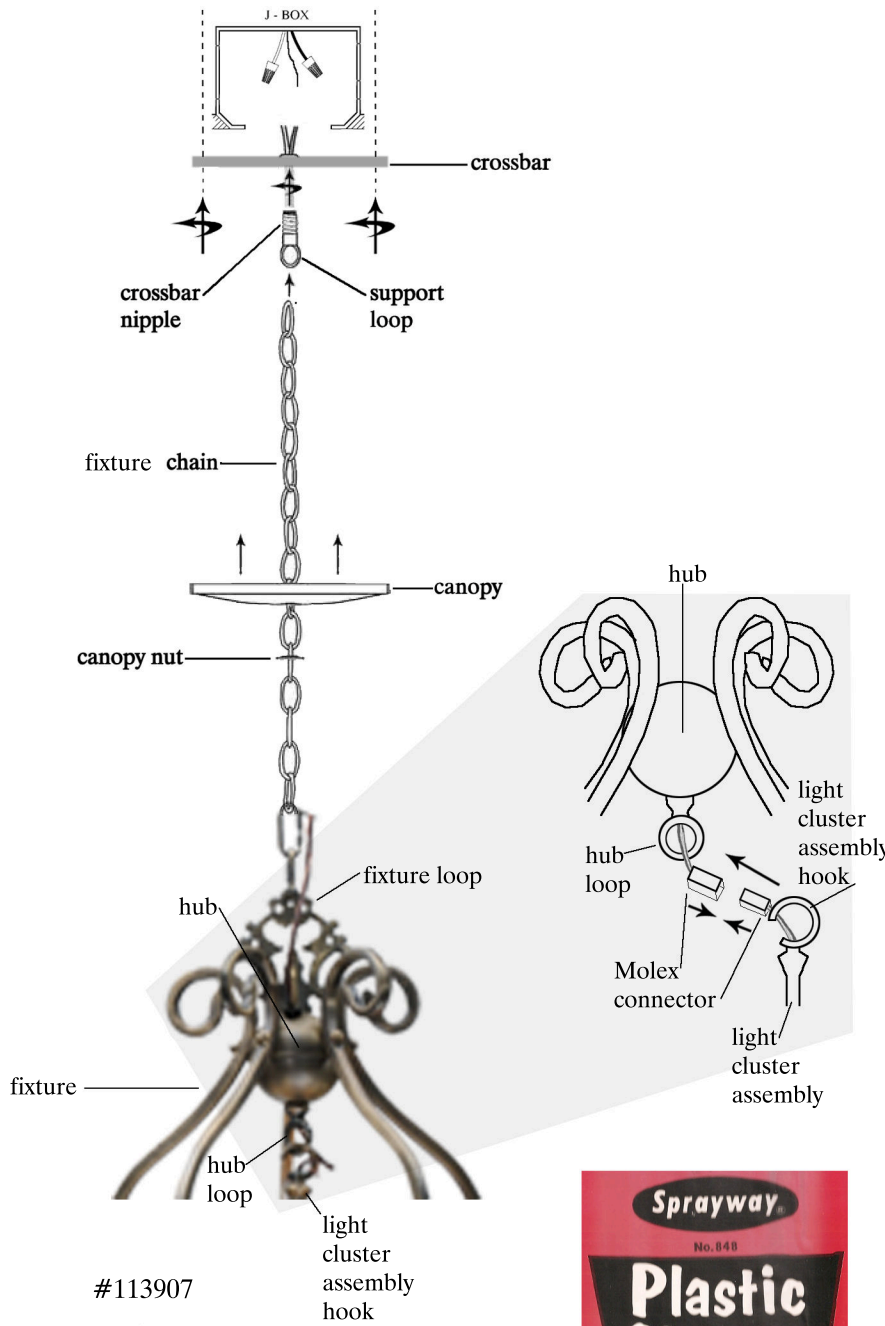

IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION


CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED.
 1. Remove light cluster assembly.

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

1. Remove light cluster assembly.
2. Attach crossbar nipple with support loop to crossbar. Mount crossbar.
3. Attach fixture chain to fixture loop.
4. Place canopy nut and canopy onto fixture chain. Attach fixture chain to support loop.
5. Wire as per local electrical code.
6. Place canopy and canopy nut to ceiling, attach canopy nut to crossbar nipple and tighten to canopy.
7. Lamp all sockets in light cluster assembly.
8. Attach light cluster assembly hook to hub loop.
9. Attach male to female Molex connector

☀ VERY IMPORTANT ☀

Lexan cleaning instructions: Lexan is scratch resistant but will scratch if cleaned improperly. Do not use Windex, Pledge, Isopropyl Alcohol, anything alcohol based or soaps used for washing cages. We recommend "Sprayway Plastic Cleaner" shown.

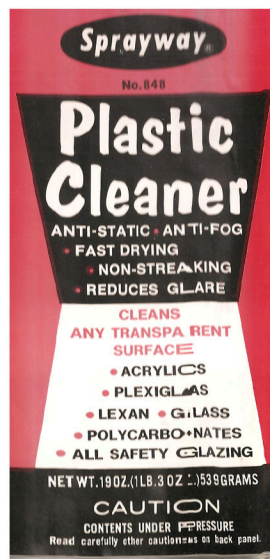

#113907



#113908



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com

