


ASSEMBLY INSTRUCTIONS FOR #135820

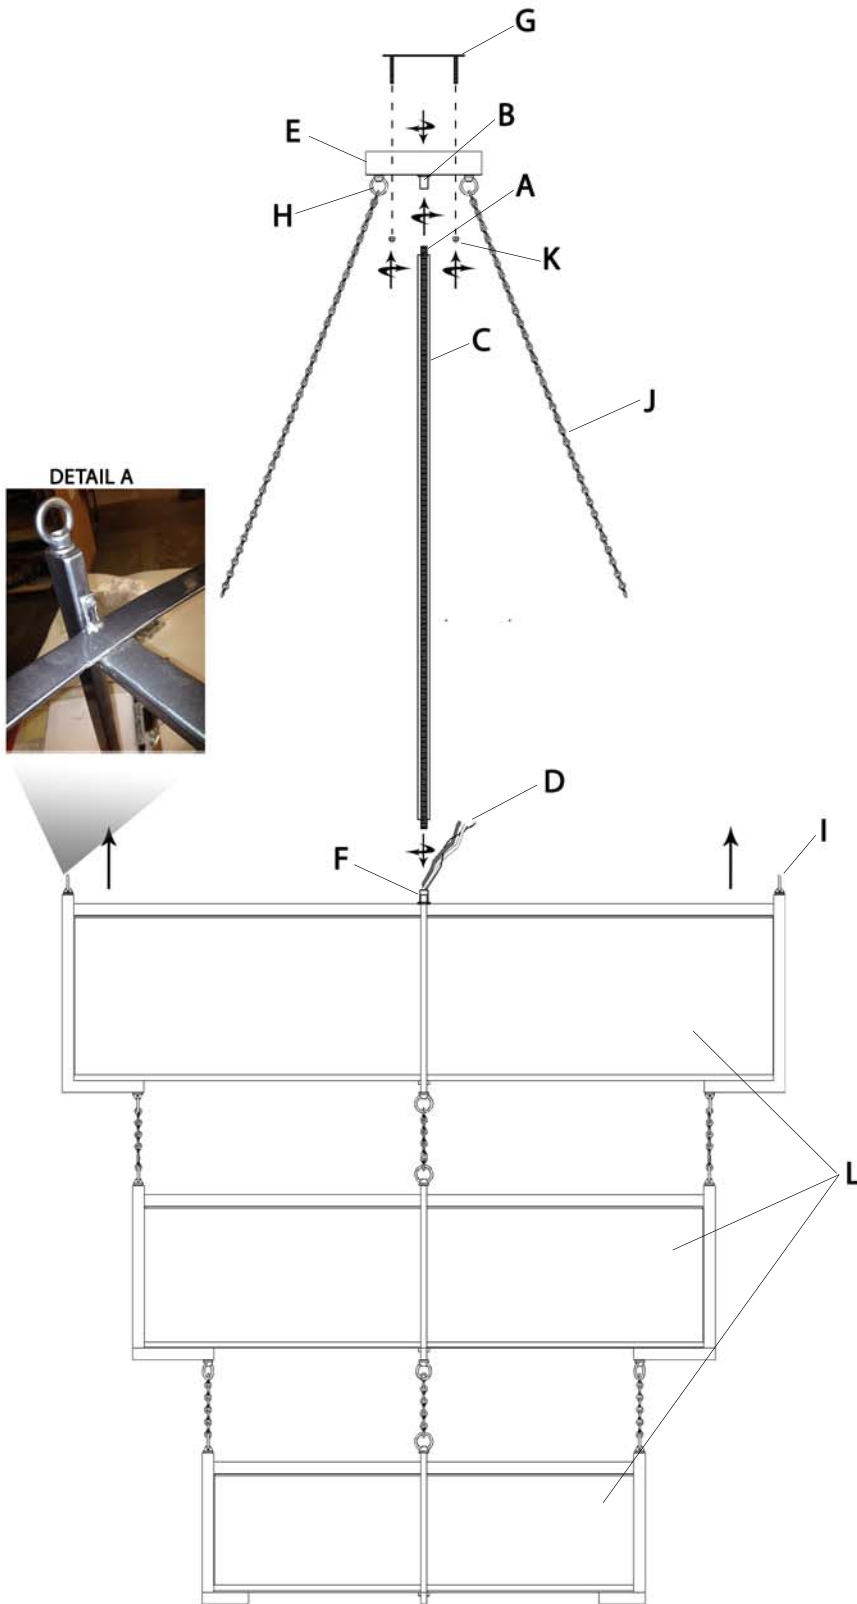

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Screw threaded rod (A) into canopy coupling (B).
- 2.) Place fixture rod (C) onto threaded rod (A), as shown.
- 3.) Feed electrical wires (D) up through threaded rod (A) and canopy (E).
- 4.) Place bottom of threaded rod (A) into frame coupling (F) and screw canopy assembly, including rods, into frame coupling (F), being careful not to twist the wires (D). Make sure canopy loops (H) line up with frame loops (I) when tight.
- 5.) Mount crossbar (G) to a secure location using customer provided screws.
- 6.) Attach fixture chains (J) to frame loops (I).
- 7.) Install light bulbs.
- 8.) Attach top acrylic diffusers using nuts and washers, provided.
- 9.) Raise up fixture to crossbar (G) and wire as per local electrical codes.
- 10.) Secure canopy (E) to crossbar (G) using acorn nuts (K), provided.
- 11.) If "dimpling" occurs in the fabric shades (L), carefully hand adjust shade frames to flatten shade surfaces.
- 12.) If there are still "dimples" in the fabric shades. Use the adjustment screws to raise or lower shade frame. (Detail A)



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com