


ASSEMBLY INSTRUCTIONS FOR # 20635

Fig.1

Screws to attach backplate
to wall or J-Box

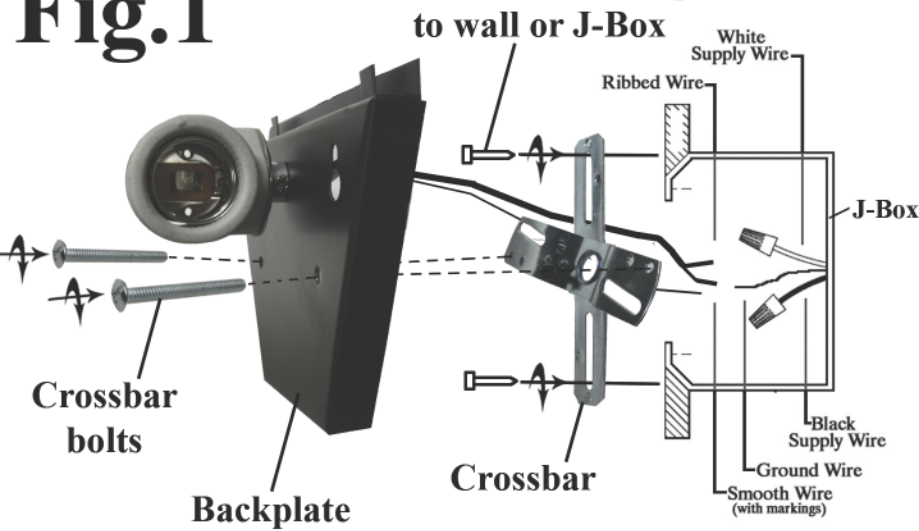


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX BEFORE STARTING
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE NOT
INCLUDED

- 1.) Attach your crossbar to wall or J-Box. (Fig.1)
- 2.) Bring backplate to wall & connect electrical wires as per your local electrical code.
- 3.) Screw your backplate to your crossbar, so that backplate is flush with wall. (Fig.1)
- 4.) Bulb your fixture, (bulbs provided by others).
- 5.) Place shade over backplate so that it is flush with wall, and lower the shade so that the shade's hang bar rests down behind the backplate tabs. (Fig.2)

Fig.2

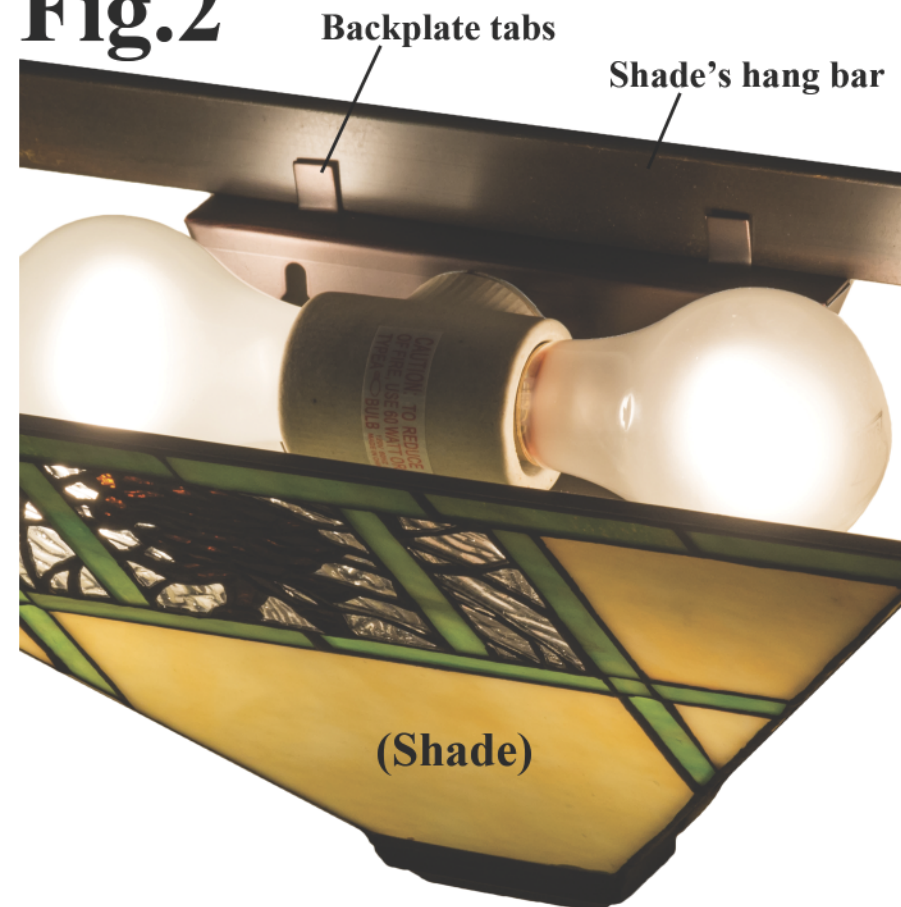

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com