

ASSEMBLY INSTRUCTIONS FOR #149113/141049

FIG. C

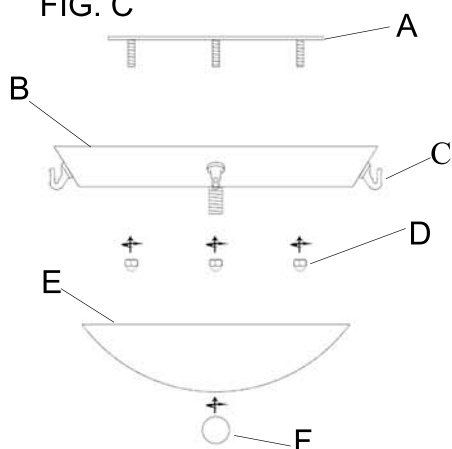


FIG. D

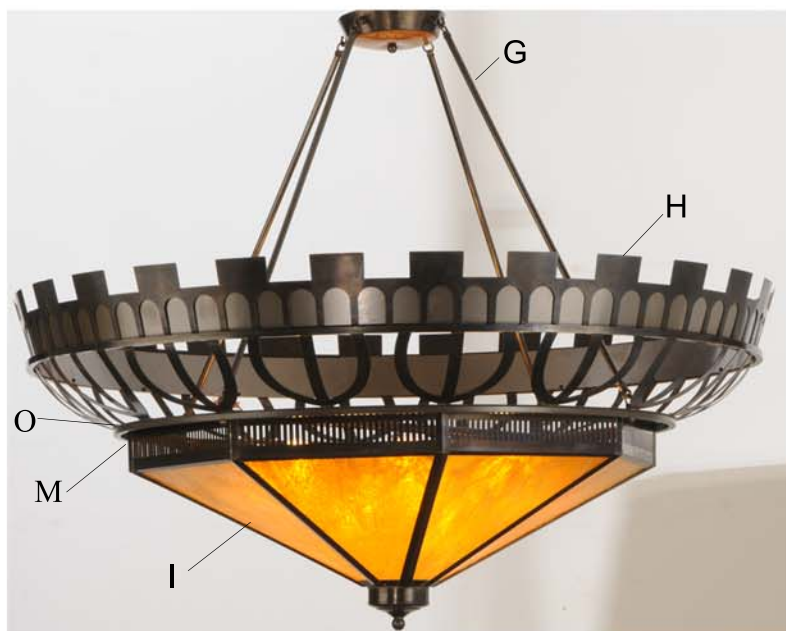


FIG. A



FIG. B



IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach mounting plate (A) to a secure location using customer provided screws.
- 2.) Use customer supplied blocking on ledge (M) to hold up fixture frame (H).
- 3.) Attach foam gaskets (L) to inside of fixture frame (H) as shown. (Fig.B)
- 4.) Carefully place glass panels (I) into fixture frame (H) so that the bottom of the panels rest on the foam gaskets (L).
- 5.) Secure glass panels (I) to frame (H) with nylon washers (J) and hex nuts (K). (Fig.B)
- 6.) Feed electrical wires (N) up through two of fixture arms (G). (Fig. A)
- 7.) Attach canopy (B) to mounting plate (A) using canopy nuts (D), provided. (Fig. C)
- 8.) Raise up fixture frame (H) to canopy (B) and secure with fixture arms (G).
- 9.) Feed electrical wires (N) through canopy hooks (C) and wire as per local electrical codes.
- 10.) Attach acrylic bowl (E) to canopy (B) using ball nut (F), provided. (Fig.C)
- 11.) If available, attach diffuser (O) to ledge (M) on fixture frame (H).

****This fixture is colored with a living finish; a patina and wax combination that will evolve throughout the item's lifetime. Great care should be taken to ensure the item maintains its youthful appearance, including periodic cleaning and waxing.****



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com