

# INSTALLATION INSTRUCTIONS

FOR ITEM 236516

*Meyda*  
CUSTOM LIGHTING

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. CEILING BRACKET (QTY 8)
3. LIGHT CYLINDER W/ CORD (QTY 8)

### **Caution:**

***Be sure power is off at the main breaker box prior to installation.  
Read all instructions in their entirety before beginning installation.***

1. Carefully unpack all components and make certain that everything is accounted for.
  2. Remove Brass Balls from Canopy Assembly to release Universal Crossbar with Studs. Reserve Balls for later use.
  3. Using Customer Supplied Hardware, affix Crossbar to Junction Box ensuring that Electrical Supply Wires remain accessible.
  4. Using Customer Supplied Hardware, affix Ceiling Brackets to desired locations on the ceiling. Ensure that connection is suitable to hold a minimum of 10lbs.
  5. Loosen Set Screws on Ceiling Brackets and feed Light Cylinder Cords through until Cylinders reach desired hanging height. Tighten Set Screws to secure Cylinders.
  6. Loosen Set Screws on Canopy Strain Reliefs and feed Cylinder Cords through. Ensure to leave enough Cord between Ceiling Bracket and Canopy to achieve desired aesthetic look. Tighten Set Screws to secure.
  7. Once care has been taken to ensure that desired aesthetic look has been achieved, trim Cords leaving enough inside Canopy to make connections to Drivers.
  8. Strip Black Insulation off of Cylinder Cords to gain access to Black and White Cylinder Lead Wires.
- EACH DRIVER WILL POWER 4 LIGHT CYLINDERS**
9. Strip Insulation off of Black Lead Wires and gang 4 of the Wires together and connect to 1 of the 2 Red Output Wires from Driver. Either Red Output Wire is acceptable.
  10. Strip Insulation off of White Lead Wires and gang 4 of the Wires together and connect to other of the 2 Red Output Wires from Driver.
  11. Repeat Steps 10 & 11 for remaining other 4 Light Cylinders and connect to other Driver.
  12. Following all Local Codes and Procedures, make electrical connection from Supply Power to Driver Input Wires. Line Supply Wire will connect to Orange Driver Wire. Neutral Supply Wire will connect to White Driver Wire.
  13. If Fixture Dimming is desired, make connection from compatible 0-10V Dimmer Switch(not included) to Driver Dimming Wires. Purple Driver Wires will connect to Positive Wire from Dimmer and Grey Driver Wires will connect to Negative Wire from Dimmer.
  14. Lift Canopy up to ceiling allowing Crossbar Studs to pass through. Secure with reserved Brass Balls.
  15. Install Eight G5.3 Base MR16 12V LED Bulbs(not included) into Light Cylinder Sockets.
  16. Power on and ENJOY!!!

# INSTALLATION INSTRUCTIONS

FOR ITEM 236516

*Meyda*  
CUSTOM LIGHTING


**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*  
**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. CEILING BRACKET (QTY 8)
3. LIGHT CYLINDER W/ CORD (QTY 8)

### Caution:

**Be sure power is off at the main breaker box prior to installation.  
Read all instructions in their entirety before beginning installation.**

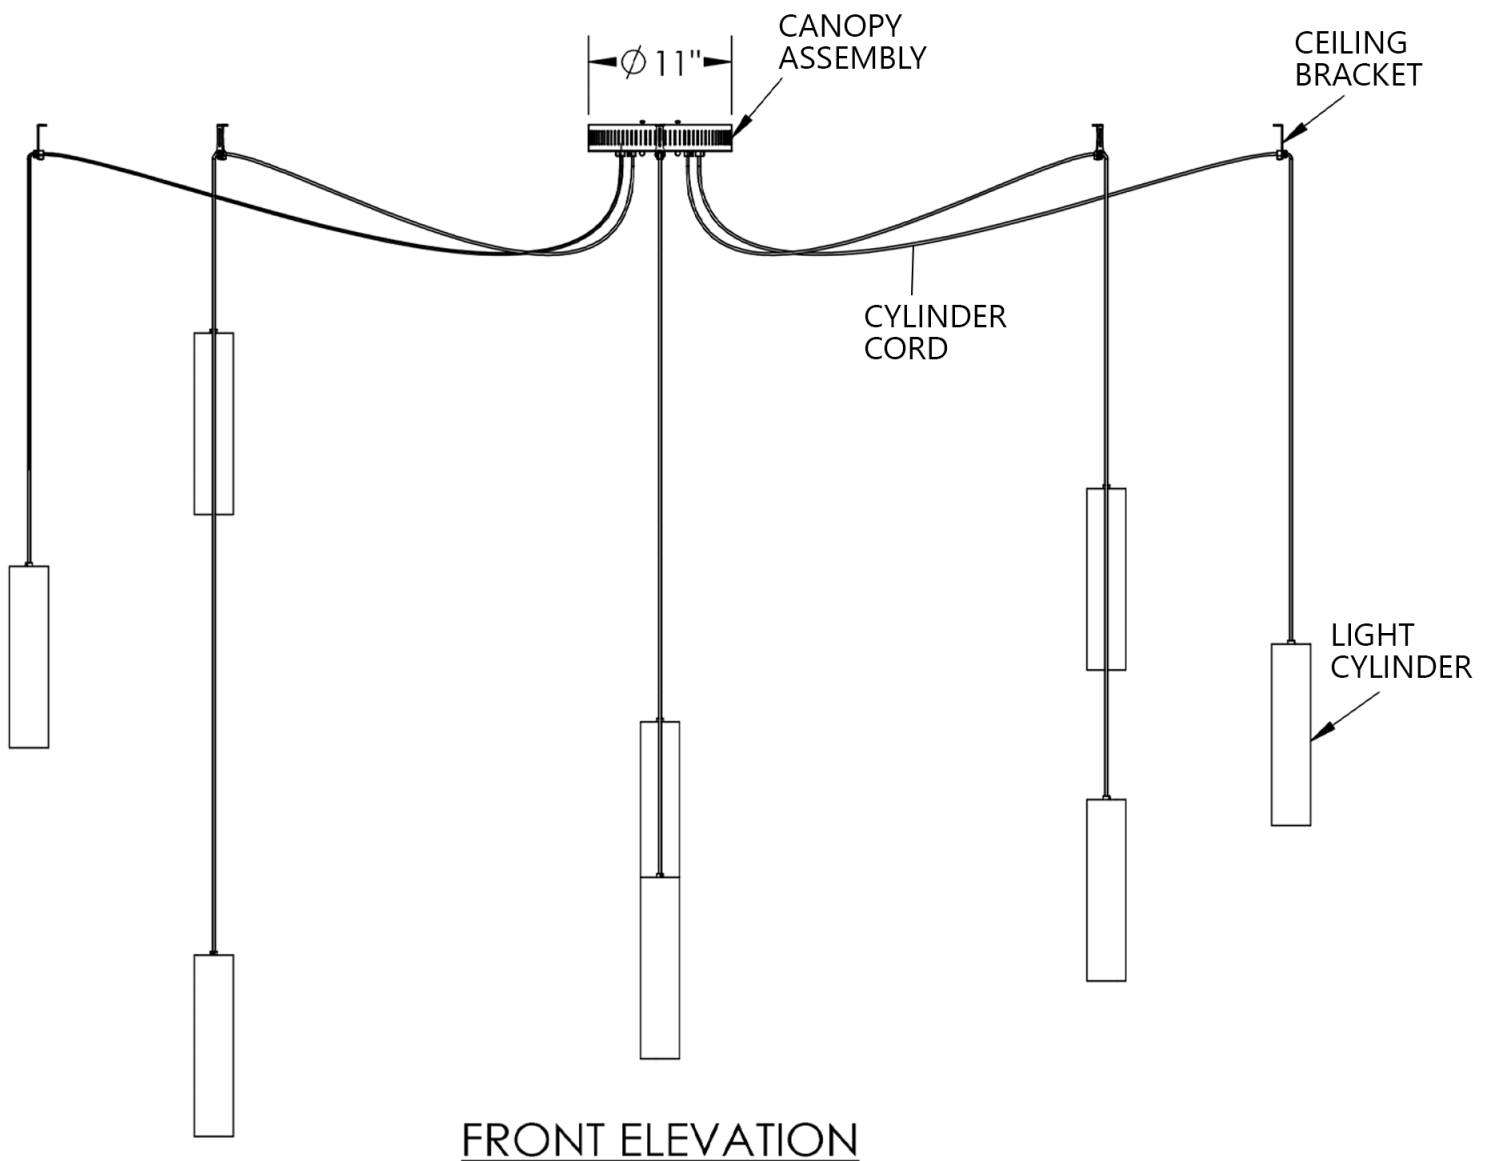

# INSTALLATION INSTRUCTIONS

FOR ITEM 236516



*Meyda*  
CUSTOM LIGHTING

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*  
**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. CEILING BRACKET (QTY 8)
3. LIGHT CYLINDER W/ CORD (QTY 8)

**Caution:**  
*Be sure power is off at the main breaker box prior to installation.  
Read all instructions in their entirety before beginning installation.*

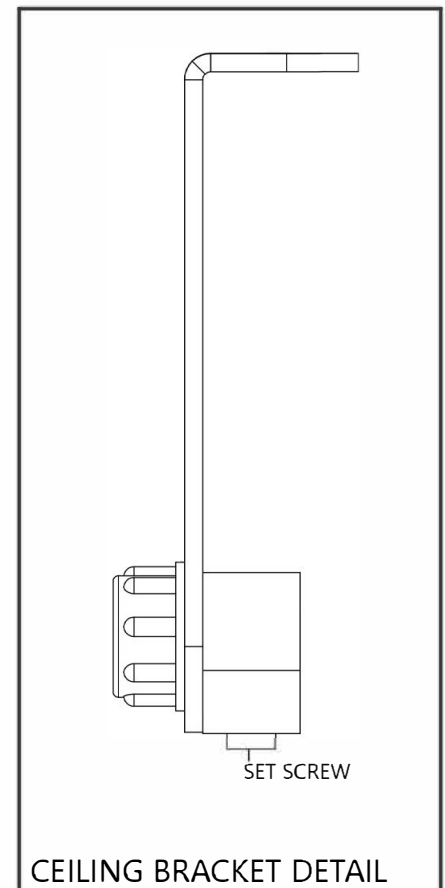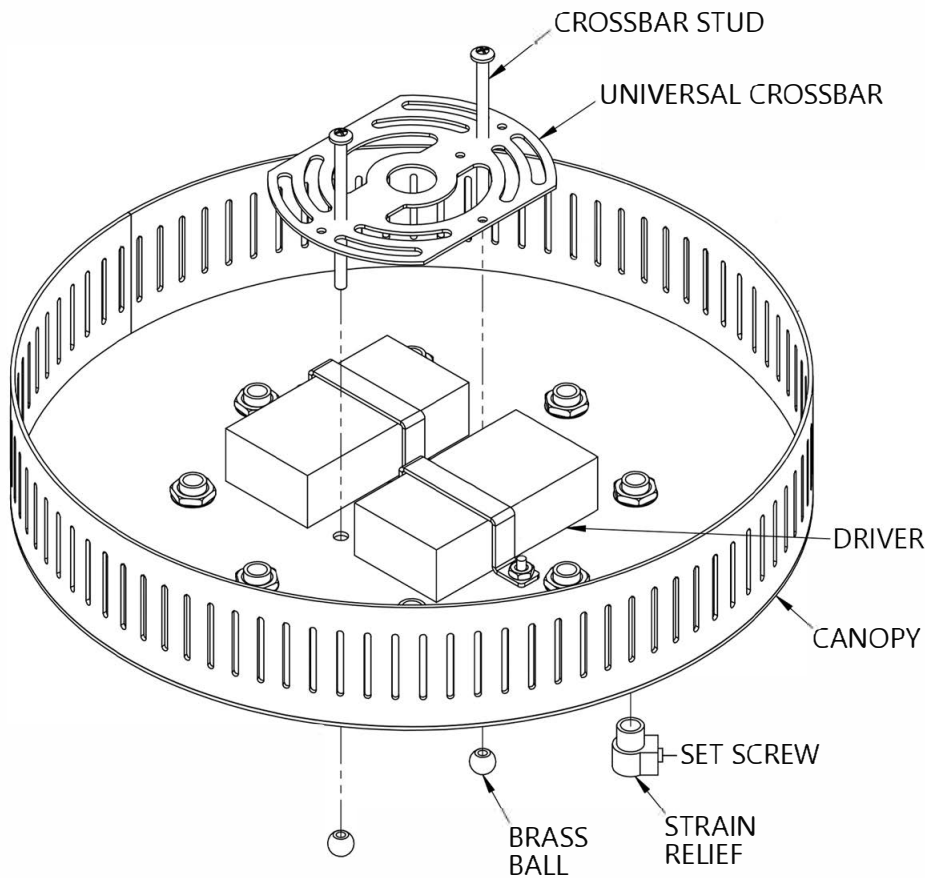

# INSTALLATION INSTRUCTIONS

FOR ITEM 236516

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*  
**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. CEILING BRACKET (QTY 8)
3. LIGHT CYLINDER W/ CORD (QTY 8)

**Caution:**  
*Be sure power is off at the main breaker box prior to installation.  
Read all instructions in their entirety before beginning installation.*




CEILING BRACKET DETAIL



CANOPY INTERIOR DETAIL



SOCKET DETAIL

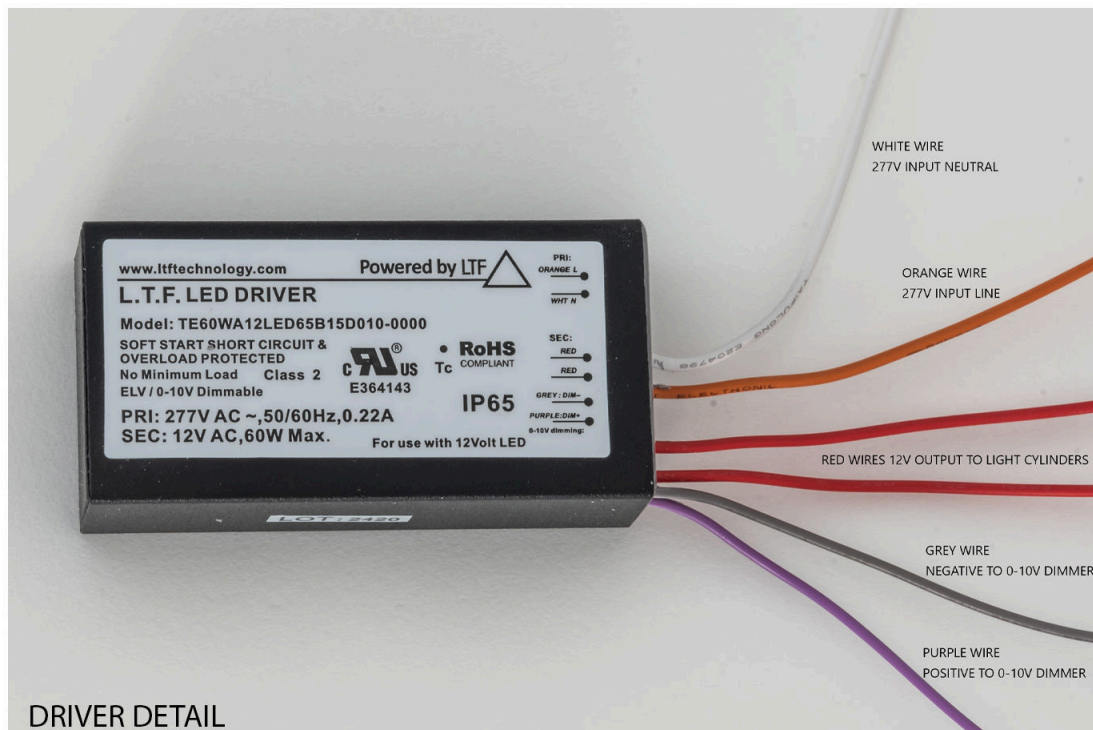

DRIVER DETAIL