
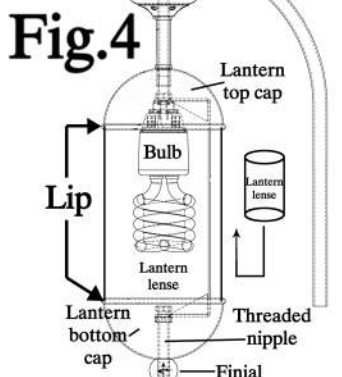


# ASSEMBLY INSTRUCTIONS FOR #145201

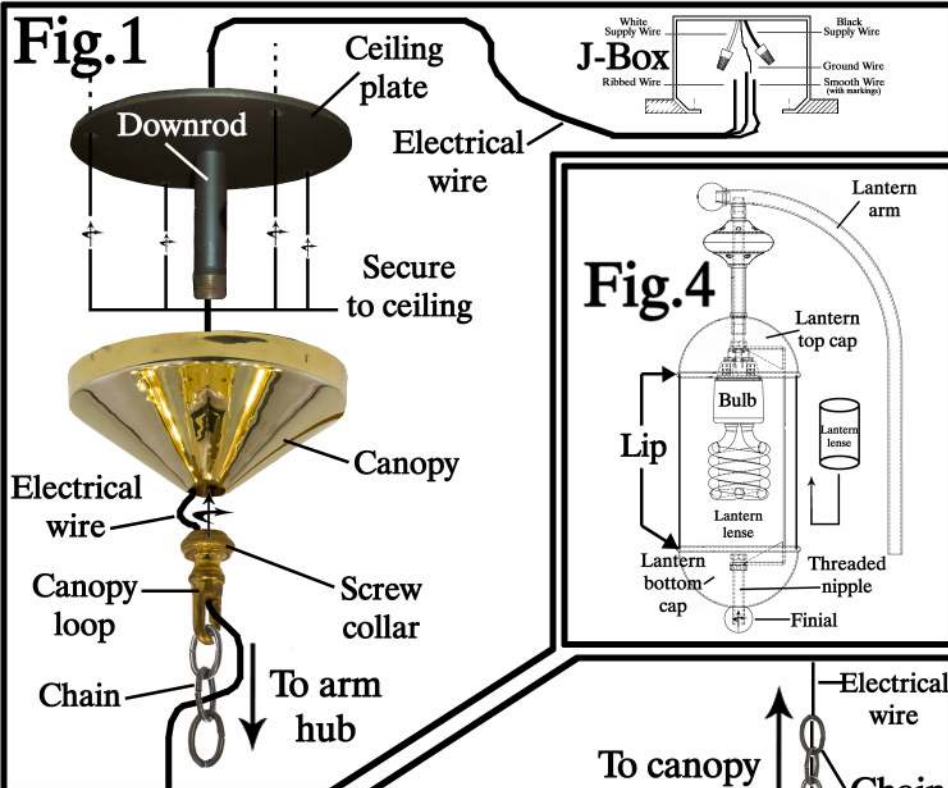




## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach ceiling plate to ceiling. Slide canopy onto downrod. Screw your canopy loop onto the downrod. Leave a gap between the top of your canopy and your ceiling, so that you have room to connect electrical wires.(Fig.1)
- 2.) Attach chain to canopy loop. Determine desired overall height, attach arm hub to bottom of chain and close the open link that connects hub to chain.(Fig.1&5)
- 3.) Run your electrical wire up the length of the chain, through the canopy loop, canopy, & ceiling plate. Connect all electrical wires as per local codes.(Fig.1)
- 4.) You should have the canopy through to the arm hub (Fig.5) hanging from ceiling. Make your canopy flush with ceiling.
- 5.) Hang all of your arms from arm hub. (Fig.2&5) Line up lantern ring so that quick plugs line up. Raise your lantern ring to arm hub and hook the tier loops on the lantern ring with the hooks on arms. (Fig.3&5)
- 6.) Connect your two quick plugs.
- 7.) Slide your lantern lense up to lantern top cap so that it rests within the lip. You may bulb at this time. Slide the lantern bottom cap onto nipple so that lense fits snug within lip. Secure bottom cap with finial.
- 8.) Power on, Enjoy your new fixture!

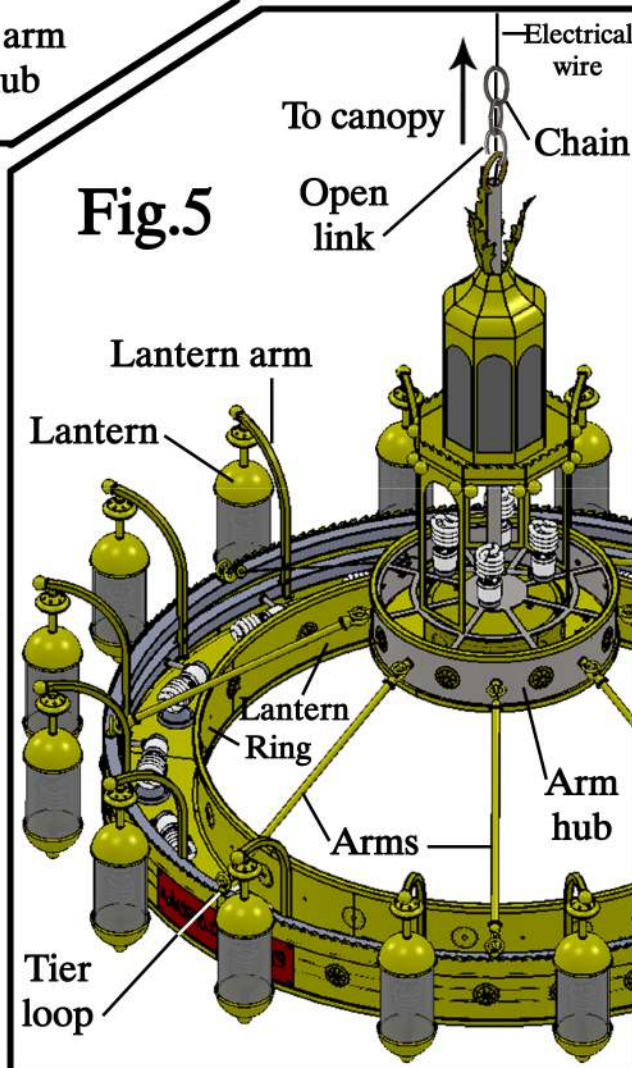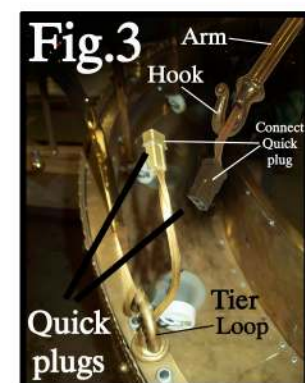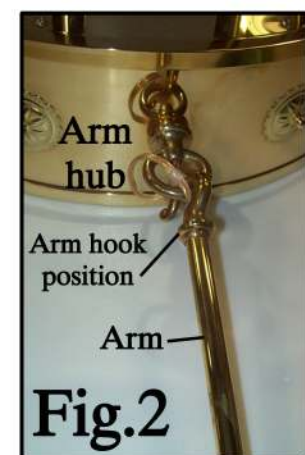

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)