


ASSEMBLY INSTRUCTIONS FOR #150900

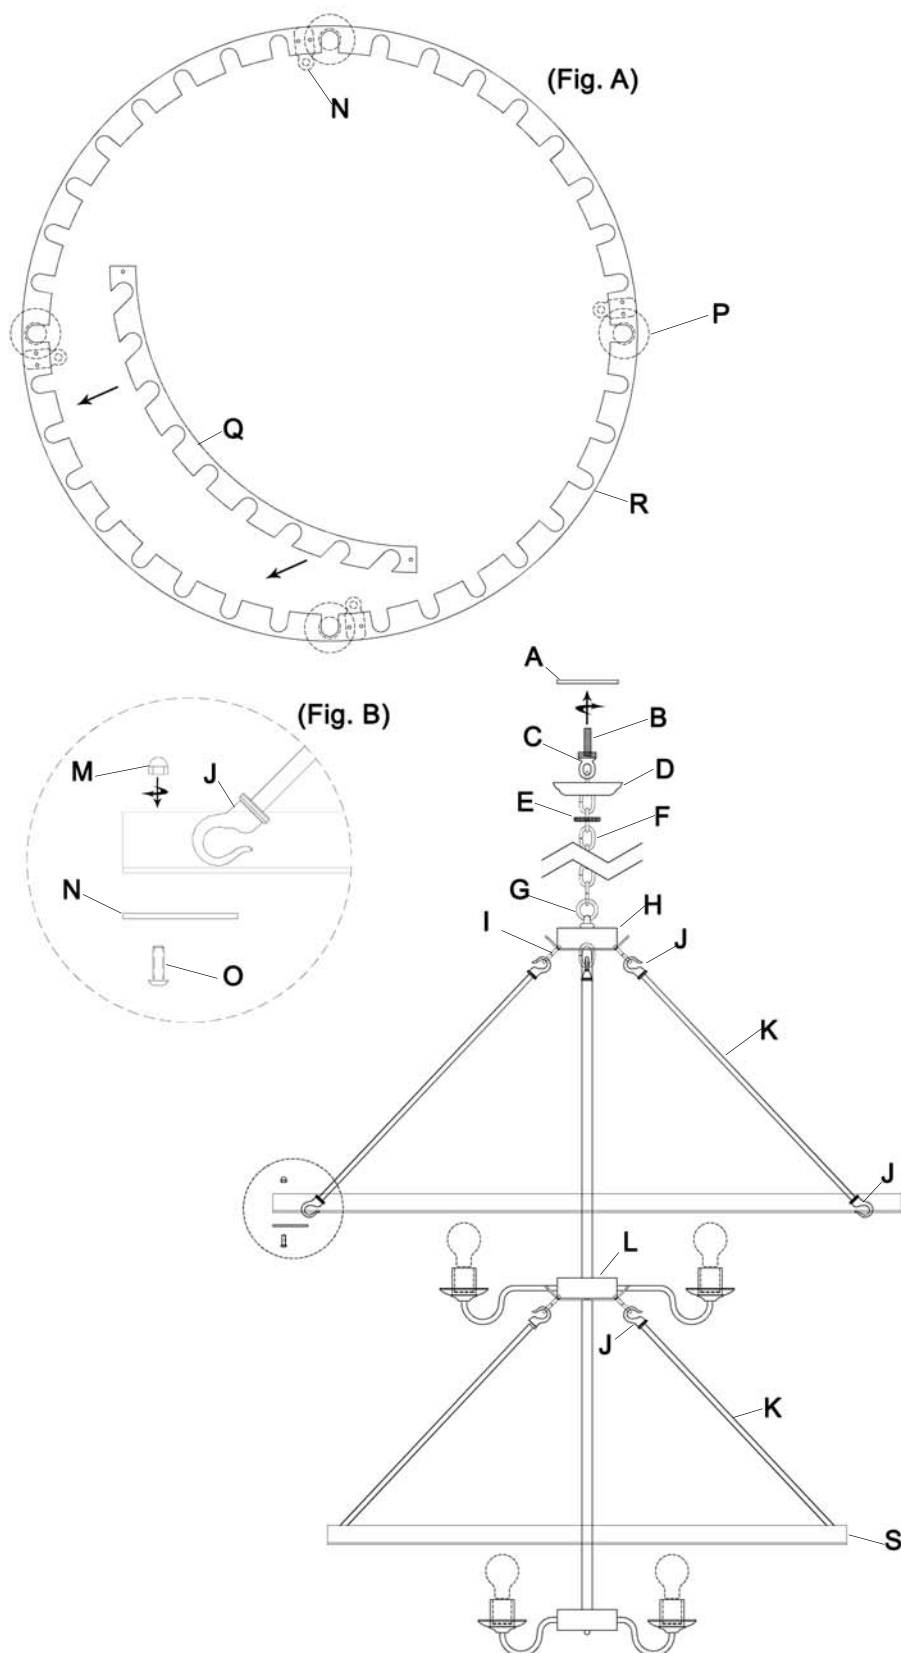

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Begin by inserting 4 bottles (P) into top fixture frame (R) so that the frame is suspended above flat surface by the bottles. (Fig. A)
- 2.) Insert remaining bottles (P) into top fixture frame (R).
- 3.) Attach the neck braces (Q) to the necks of each bottle (P), lining up the quarter inch holes in frame (R) to the holes in neck brace (Q).
- 4.) Secure neck brace (Q) to top fixture frame (R) using frame clip (N), frame nut (M), and frame screw (O). (Fig.B)
Repeat steps (1 - 4) for bottom fixture frame (S)
- 5.) Attach crossbar nipple (B) with support loop (C) to crossbar (A).
- 6.) Mount crossbar (A) to a secure location using customer provided screws.
- 7.) Attach fixture chain (F) to hub loop (G).
- 8.) Place canopy nut (E) then canopy (D) onto fixture chain (G).
- 9.) Attach fixture chain (G) to support loop (C).
- 10.) Wire as per local electrical code.
- 11.) Slide canopy (D) up to ceiling, screw canopy nut (E) onto support loop (C) and tighten to ceiling.
- 12.) Attach chain links (I) to hub (H)
- 13.) Attach fixture arms (K) to chain links (I), using fixture hooks (J).
- 14.) Raise up assembled top fixture frame (R) and attach fixture hooks (J) to frame clips (N).
Repeat steps (12 -14) to attach bottom fixture frame (S) to hub (L)



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com