


# ASSEMBLY INSTRUCTIONS FOR #153502

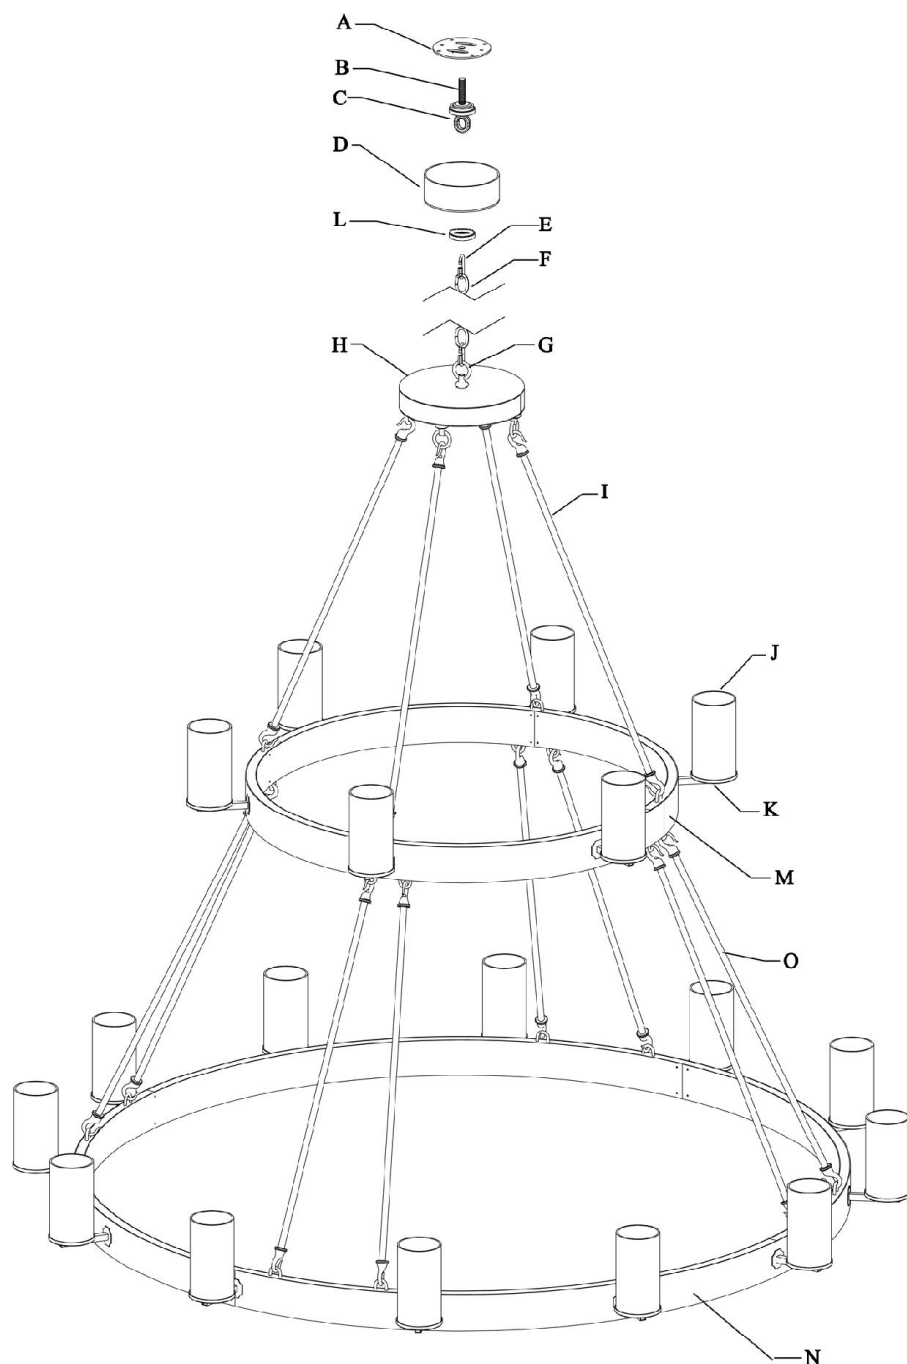

## IMPORTANT

**TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION**

**CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED**

**THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.**

- 1.) Mount cross bar (A) to a secure location using customer provided screws.
- 2.) Use quick link (E) to attach fixture chain (F) to hub loop (G).
- 3.) Place canopy nut (L) then canopy (D) onto fixture chain (F) and attach fixture chain (F) to screw collar loop (C).
- 4.) Secure screw collar loop (C) to cross bar (A) using nipple (B).
- 5.) Thread electrical wires from hub loop (G), up fixture chain (F), through canopy nut (L), and canopy (D).
- 6.) Wire as per local electrical codes.
- 7.) Slide canopy (D) up to ceiling and secure with canopy nut (L).
- 7.) Attach fixture arms (I) to loops on bottom of hub (H).
- 8.) Raise up top tier (M) and secure to fixture arms (I).
- 9.) Connect electrical plugs from fixture arm (I) to top tier (M).
- 10.) Attach fixture arms (O) to loops on bottom of top tier (M).
- 11.) Raise up bottom tier (N) and secure to fixture arms (O).
- 12.) Connect electrical plugs from fixture arms (O) to bottom tier (N).
- 13.) Use brown silicone, provided, to secure glass cylinders (J) to shade holders (K).



*"A Commitment to Excellence in Lighting and Service"*

**CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009**

**MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET**

**visit us on the web at [www.meyda.com](http://www.meyda.com)**