
## ASSEMBLY INSTRUCTIONS FOR # 154184

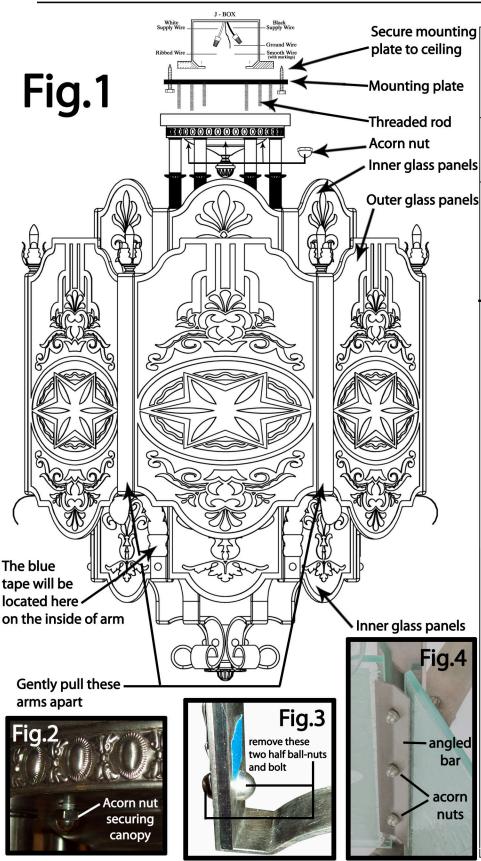

## **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

1.Secure your mounting plate to the ceiling (Fig.1) not to the j-box (this fixture weighs 165 lbs.).

2.Bring fixture to mounting plate and make all electrical connections as per local codes.

3.Slide fixture onto the six threaded rods protruding out of the mounting plate. Secure with the six acorn nuts provided.(Fig.2)

4. You may bulb your fixture at this time. Bulbs provided by others.

5.Placement of etched glass panels begins with the outer most panels, followed by the inner panels.

6.Begin by first locating the blue tape. (Fig.1&3) This blue tape marks the halfball-nuts & bolt you must remove to fit the outer glass panels. Unscrew the halfball-nuts and remove the bolt, set aside.

7.Start installing the outer panels in either direction of the blue tape. As you go secure the panels with the steel angled bar and nuts provided. (Fig.4) When you reach the space leading to the blue tape, you must gently pull apart the two arms (Fig.1) flanking the empty space, enough so that you can place the last outer panel. Replace the bolt & halfball-nuts. 8.Now you may continue installing the inner panels in the same fashion, securing as you go with the steel angled bars and nuts provided. 9.Power on. Enjoy your new fixture. 10.Have a Meyda Fine Day!!!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET visit us on the web at www.meyda.com