



# ASSEMBLY INSTRUCTIONS FOR # 156557

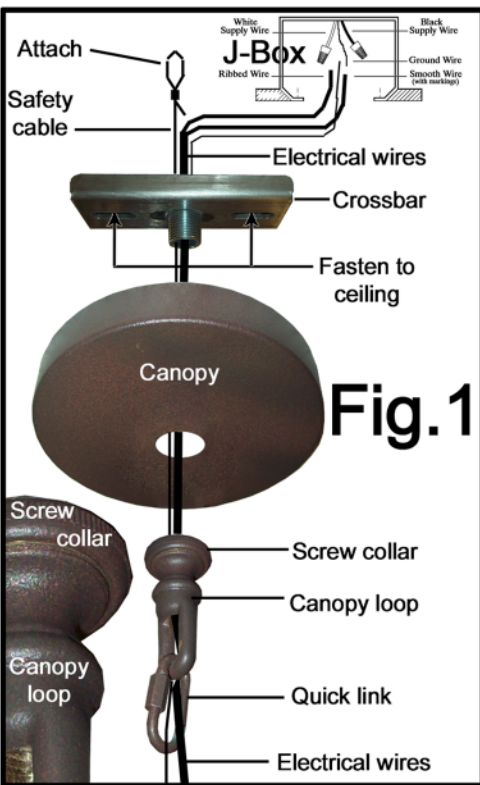

## Fig. 2

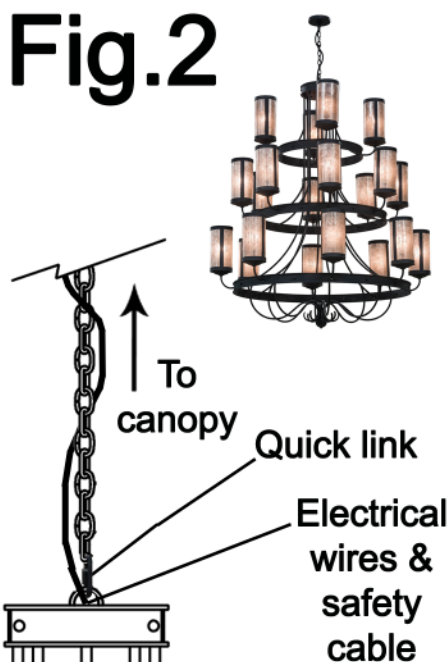

### IMPORTANT


TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 135 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach crossbar to ceiling, make sure it will hold 140lbs.(Fig.1) See warning!
- 2.) Connect your canopy loop & quick link to your chain. Unscrew the screw collar towards the quick link & fixture. Drop the canopy down. You will screw the canopy loop onto crossbar, and when you are ready you will slide canopy up to ceiling followed by the screw collar and screw it onto canopy loop holding canopy in place.(Fig.1)
- 3.) Attach the fixture to the chain via the quick link. Run your electrical wire, & cable, up the chain, & through the canopy loop, canopy, & crossbar.(Fig.1&2)
- 4.) Attach safety cable to a secure support in ceiling. Attach all electrical wires as per local codes.(Fig.1&2)
- 5.) Run canopy up the chain to the ceiling, and secure flush to the ceiling with the screw collar.(Fig.1)
- 6.) From handling, the shades may need to be adjusted. You may adjust the shades using finesse and a gentle hand. Use slight movements, and be sure to look at them from different angles to be sure of your intended placement.
- 7.) Bulb your fixture, power on, Enjoy!
- 8.) Have a Meyda Fine Day!

With finesse you may move shades to make straight.

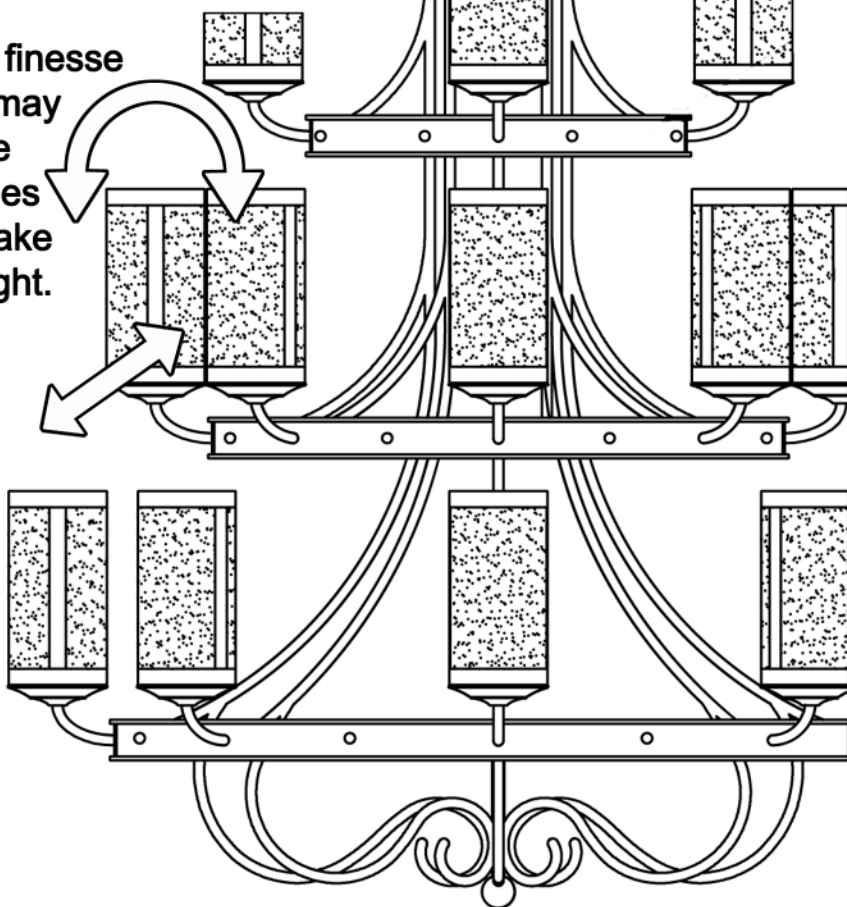

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)