
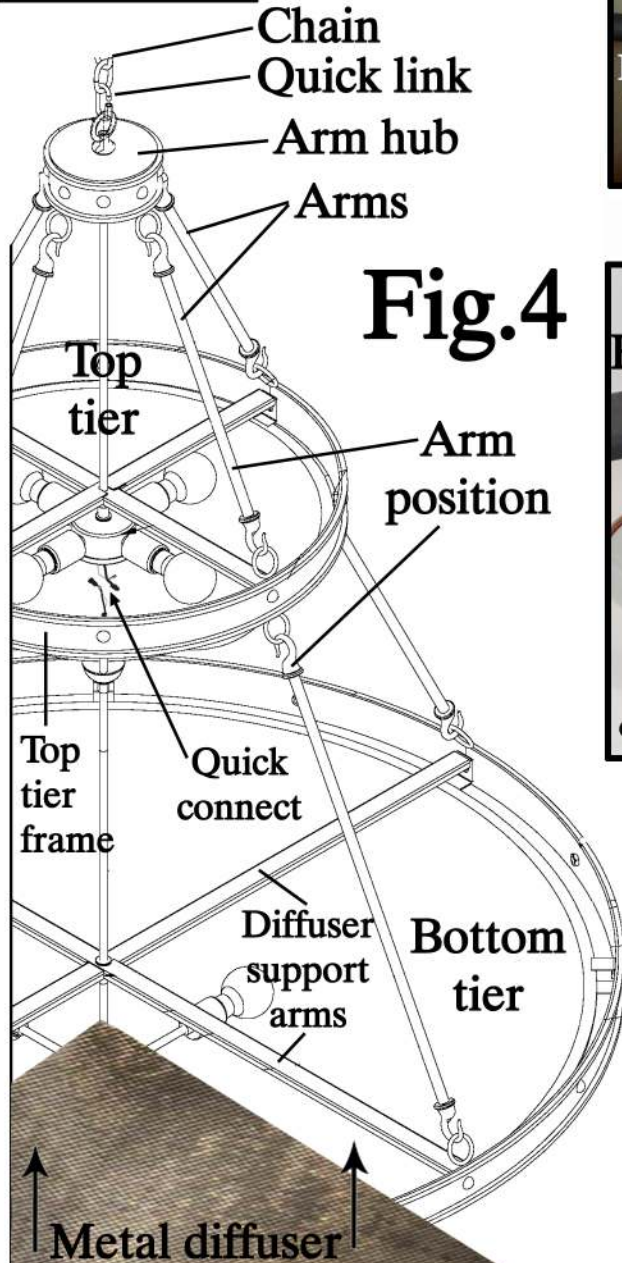
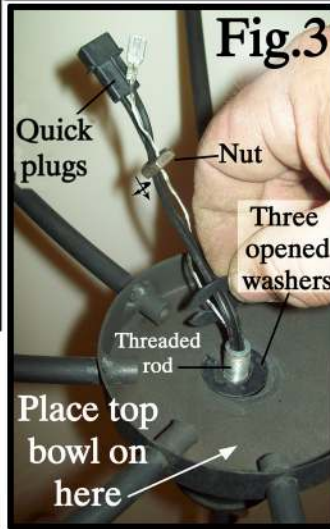


# ASSEMBLY INSTRUCTIONS FOR # 156868

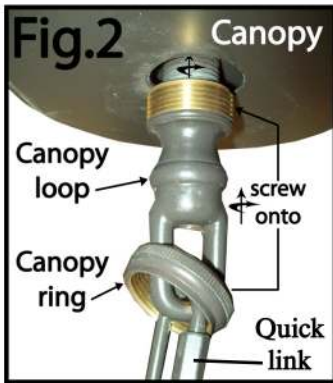

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

## !WARNING!

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach your crossbar to your support in ceiling. (Fig.1) Screw your canopy loop onto crossbar. Connect chain with a quick link to your canopy loop. Your chain will run from canopy loop through the canopy, then the canopy ring and connect to hub using quick link. Run your wires up the chain, through the crossbar. Connect all electrical wires as per local codes.(Fig.1,2&4) Send canopy to ceiling and secure in place by screwing the canopy ring onto the canopy loop.(Fig.2)
- 2.) Hang the shorter arms from your hub, Take note of the hook's position.(Fig.4)
- 3.) Send the lower light cluster's threaded rod through top tier's center. Place 3 opened washers onto the threaded rod and screw the nut down onto the threaded rod.(Fig.3) Place top bowl into its own frame, allowing quick connect plugs to penetrate center of bowl. Connect quick plugs together.(Fig.3&4)
- 4.) Connect all the larger arms to the top tier frame. Hang your lower tier from those arms just placed. Place diffuser support arms onto top tier, and bottom tier,(Fig.4&5) resting them on the frame's brackets.(Fig.6) Tighten the knurled nut down onto the support arms.(Fig.5) Bulb your fixture, and place your metal diffusers onto top & bottom tier.(Fig.4)
- 5.) Power on, Enjoy! Have a Meyda Fine Day!

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)

