



# ASSEMBLY INSTRUCTIONS FOR #158295

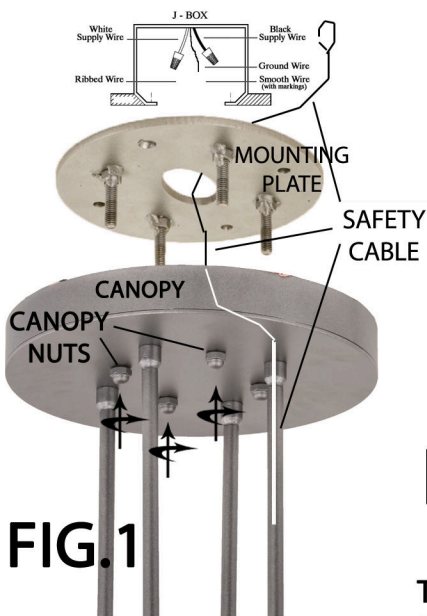


**FIG.1**

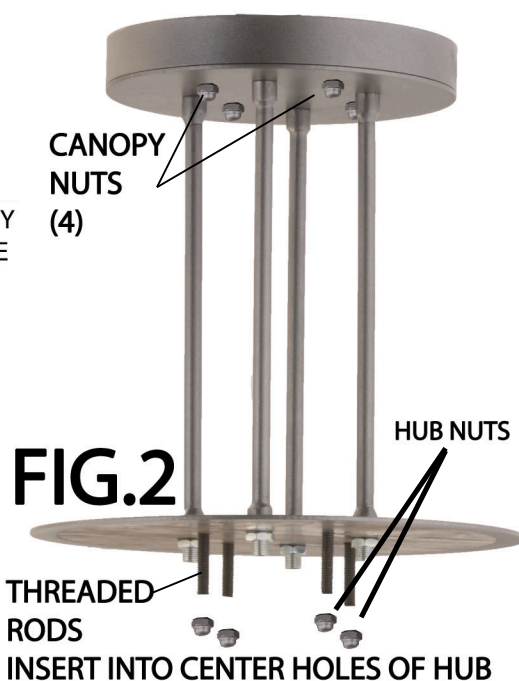


**FIG.2**



**FIG.3**

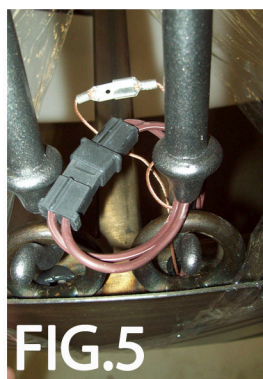

**FIG.5**

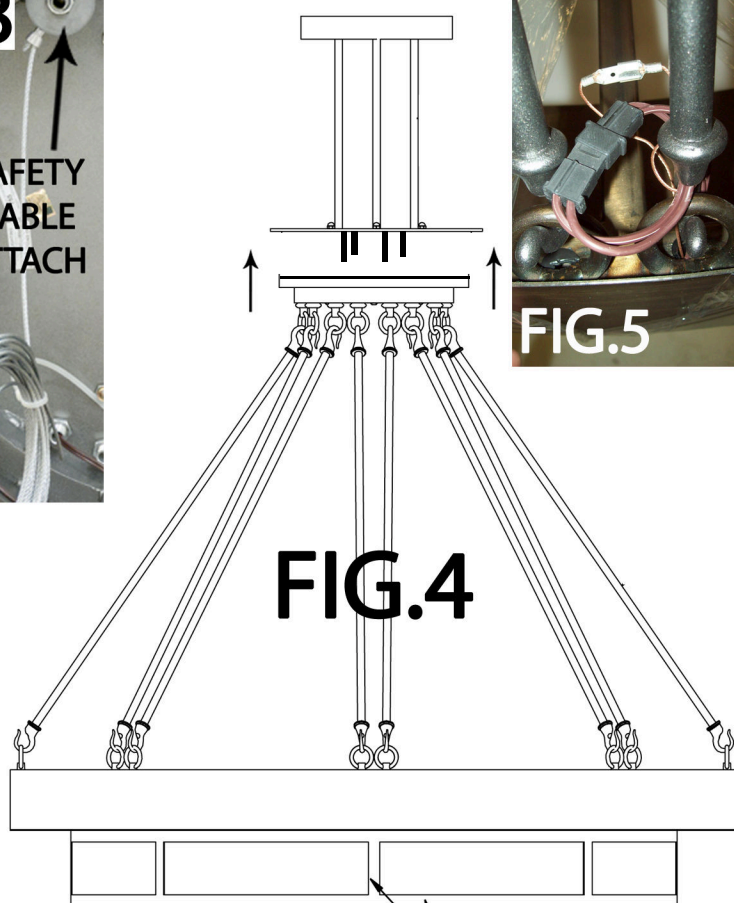

**FIG.4**

<p><b>IMPORTANT</b></p> <p>TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION</p>
<p>CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED</p>
<p>THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.</p>
<ol style="list-style-type: none"> <li>1) ATTACH MOUNTING PLATE TO CEILING. (FIG.1) DO NOT ATTACH TO J-BOX SEE WARNING ABOVE.</li> <li>2) WIRE AS PER LOCAL ELECTRICAL CODES.</li> <li>3) ATTACH SAFETY CABLE TO THE CEILING WHICH WILL RUN TO THE HUB. (FIG.1)</li> <li>4) SECURE CANOPY INTO PLACE WITH CANOPY NUTS. (FIG.1) FIXTURE SHOULD LOOK LIKE FIG.2 AT THIS TIME.</li> <li>5) MAKE ALL WIRE CONNECTIONS W/ARMS, CANOPY &amp; RODS, INSIDE HUB, ACCORDING TO LOCAL CODES.</li> <li>6) ATTACH SAFETY CABLE TO HUB (FIG.3)</li> <li>7) ATTACH HUB TO CANOPY &amp; CANOPY RODS, SECURE WITH PROVIDED NUTS. (FIG.2&amp;4)</li> <li>8) HANG THE ARMS FROM THE HUB. (FIG.4)</li> <li>10) YOU MAY BULB SHADE BEFORE OR AFTER YOU RAISE IT TO THE ARMS.</li> <li>11) ONCE SHADE IS LIFTED INTO PLACE &amp; HANGING FROM ARMS MAKE ALL ELECTRICAL CONNECTIONS USING PLUGS PROVIDED. (FIG.5)</li> <li>12) ONCE LARGE SHADE IS BULBED, CONNECTED, &amp; HANGING FROM ARMS YOU MAY PUT TOP DIFFUSERS INTO PLACE SECURING WITH METAL STRIPS AND SCREWS PROVIDED. (FIG.6)</li> <li>14) TURN ON YOUR NEW FIXTURE, ENJOY! AND HAVE A MEYDA FINE DAY!</li> </ol>
<p><b>FIG.6</b></p>



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)