
## ASSEMBLY INSTRUCTIONS FOR#132582 (100424)

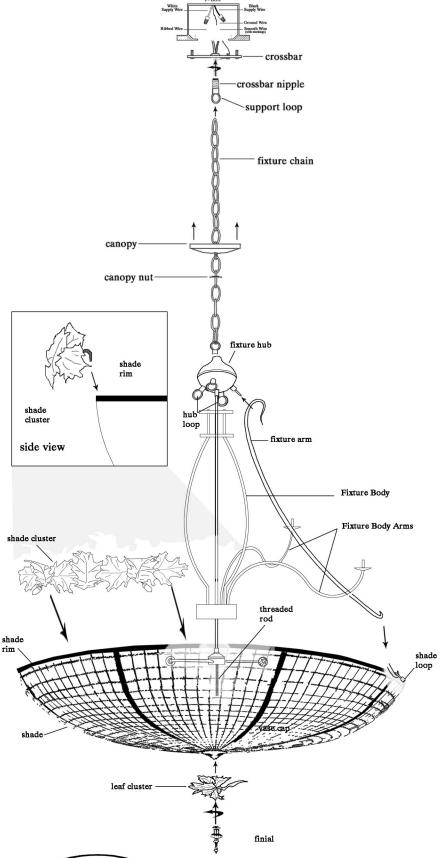

## **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1. Determine the height the fixture will hang from the ceiling, Adjust height by add/remove links of chain from section of fixture chain ABOVE the fixture hub.
- Screw crossbar to j-box, attach cross-bar nipple to crossbar, screw support loop onto crossbar nipple, attach fixture chain to hub, place canopy nut then canopy onto fixture chain, attach fixture chain to support loop.
- 3. Thread fixture wire through fixture chain using every third or fourth link, wire fixture to j-box wire as per local electrical code.
- 4. Slide canopy up to ceiling, slide canopy nut up and screw onto crossbar nipple, tighten to canopy.
- Inspect fixture body to make sure leaves are in correct postion and fixture arms will fit between fixture body arms.

\*Some leaves may have been bent out of shape during packing and shipping.\*

- 6. Place fixture arms onto hub loops.
- 7. Place shade up making sure threaded rod goes through vase cap, attach fixture arms to shade loops.
- 8. Place leaf cluster onto threaded rod, screw finial onto threaded rod and tighten to shade.
- 9. Place shade clusters onto rim of shade.

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET visit us on the web at www.meyda.com