
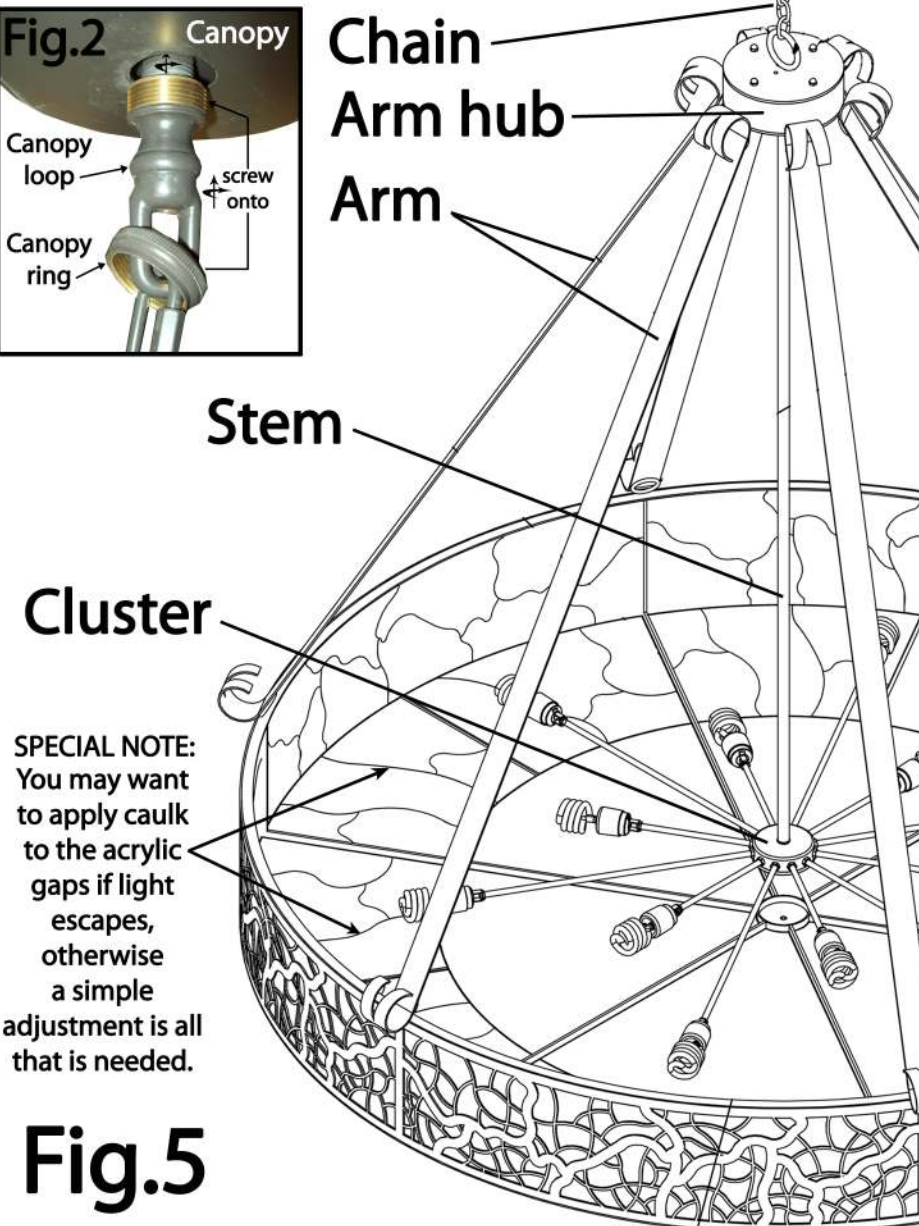
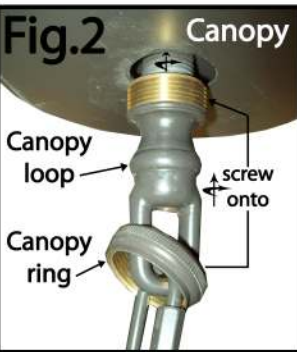
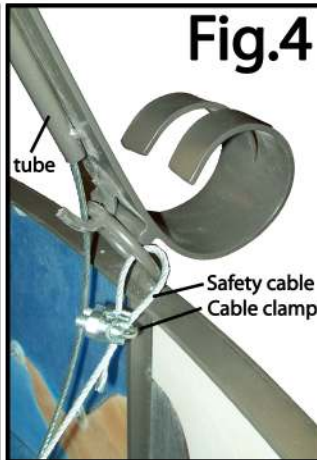


# ASSEMBLY INSTRUCTIONS FOR # 161807

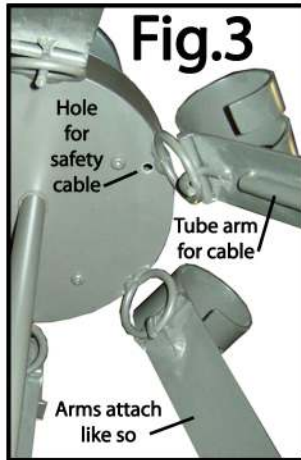

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) First attach your ceiling plate to ceiling. (Fig.1) See warning above.
- 2.) When you receive your light cluster, it will be connected to the stem only by the electrical wires. Gently pull wires through the arm hub, bringing cluster and stem together and screw your light cluster into the stem. (Fig.5)
- 3.) Attach chain to arms hub and canopy loop. Chain should be through canopy. (Fig.2&5)
- 4.) Screw canopy loop into ceiling plate. Run your electrical wires and safety cable all the way up the chain and through canopy, canopy loop, and ceiling plate. (Fig.1&2)
- 5.) Make all electrical connections as per local codes. (Fig.1) Attach your safety cable to your ceiling. See warning above.
- 6.) Slide your canopy up the chain to the ceiling plate and canopy loop. Secure in place with the canopy ring. (Fig.2)
- 7.) Find the arm with the long tube on the inside. Run your safety cable through this arm. Attach arms to hub. Attach each arm to the shade. Run the safety cable through the shade loop, and secure with a cable clamp provided. (Fig.3&4)
- 8.) Bulb your fixture, power on, Enjoy!



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)