

ASSEMBLY INSTRUCTIONS FOR # 165791

Fig.1

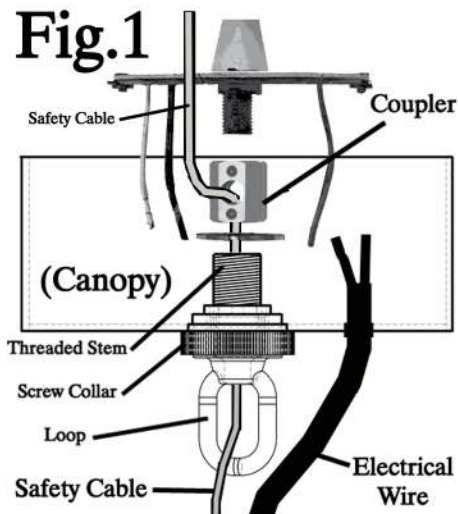


Fig.2

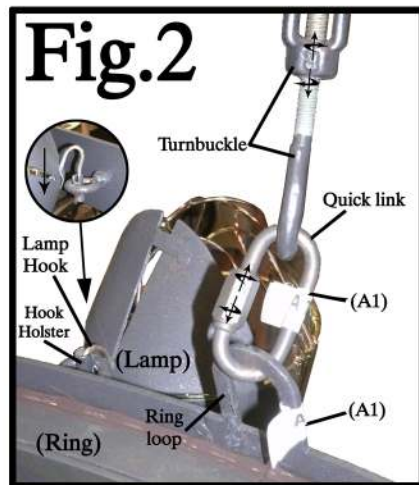


Fig.3

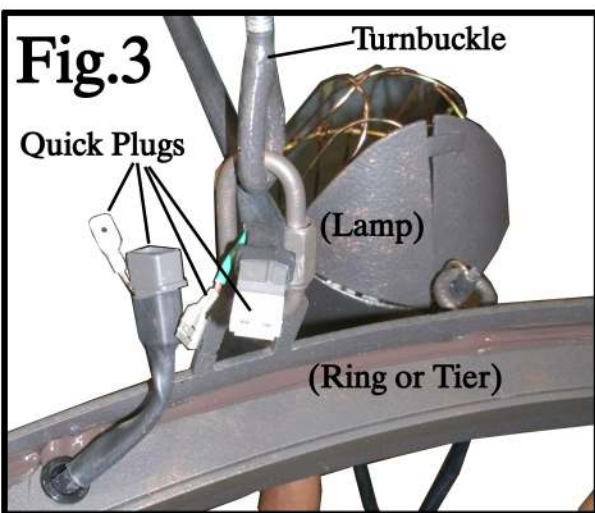


Fig.4


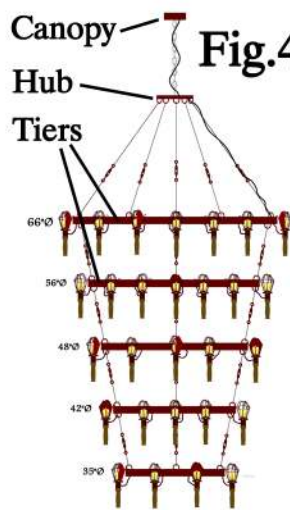


Fig.5

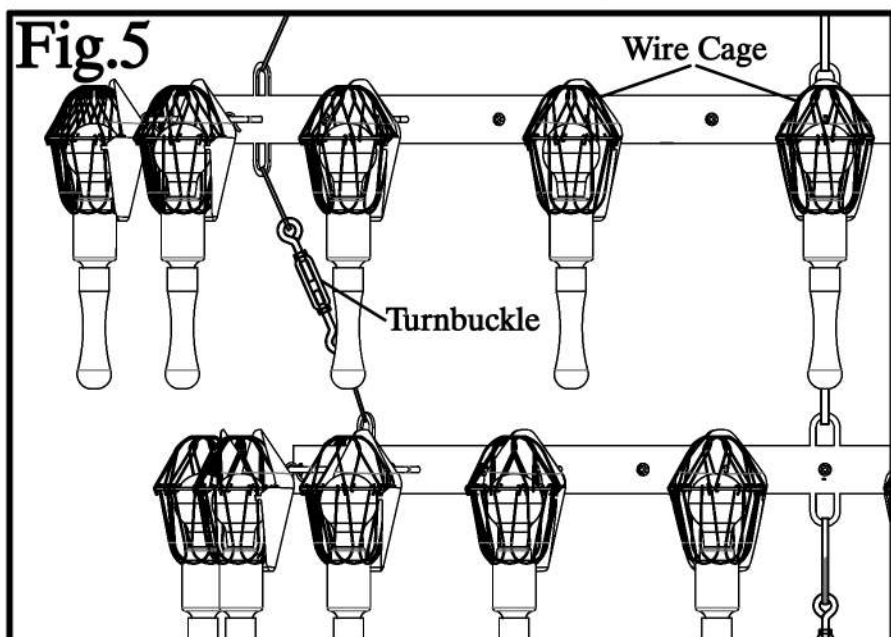

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 100 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach your canopy to your lift hardware. (Fig.1)
- 2.) The hub & top tier (Fig.4), is already connected to each other, connect these to canopy using the Quick links (Fig.2) provided. Run your safety cable through the center of the canopy and attach to your lift hardware. Run your electrical cable through the canopy's side hole, (Fig.1) and connect all electrical wires as per your local codes, & lift directions.
- 3.) On each tier your lamps will be secured to the top of the tier. As you place the ring tiers unwrap the lamps, and hook the lamps into the hook holster nearest the lamp. (Fig.2)
- 4.) Attach the rest of the ring tiers: Each tier will have a sticker on one of the quick links. Match this with a sticker placed on the next tier down. Make your connection here. (Fig.2) Lining this up will match up your quick plugs as well. Connect Quick plugs. (Fig.3) As you are placing the tiers you may turn the turnbuckles to level each tier (if you need to). (Fig.2&5)
- 5.) You may bulb your fixture at this time, to do so just spread the front of the wire cage, bulb, and push cage back together. (Fig.5 & below)

6.) Power on, Enjoy!

7.) Have a Meyda Fine Day!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com