

THIS FIXTURE WEIGHS OVER 100 LBS.

0700 12/4/15

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR # 169772

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED






1. Attach crossbar nipple with support loop to crossbar.
2. Attach crossbar to secure location in your ceiling.
3. Attach fixture chain to hub loop. (See 2nd pg. Diagram)
4. Place canopy nut than canopy on to fixture chain as shown.
5. Attach fixture chain to support loop.
6. Wire as per local electrical code.
7. Slide canopy up to ceiling, screw canopy nut onto crossbar nipple and tighten to canopy.

For Steps 8-13 See 2nd Page Diagram

- 8.) Attach crystal to the chandelier. Start from the top & work your way down.
- 9.) Connect crystal P to the top thin arm.
- 10.) Place crystal O onto the lower thin arm at the top of your fixture. Run your crystal's wire up through the hole, bend wire down, and wrap the wire around once or twice between the top bead and the thin arm. Now wrap your wire around the thin arm a few times. You may cut excess wire when you are sure that it is secure. (Fig.4)
- 11.) Screw the spires into the middle of the highest leaf group.
- 12.) Connect crystal M to either side of the spire (N) on the front leaves (in front of "L").

When placing strung crystal remember the thick side of the chain is always toward the center.

- 13.) Place the K & L strung crystals. The thick side of "K" will be connected to branches near center of fixture. Thin side of "K" to branches below the higher candle.

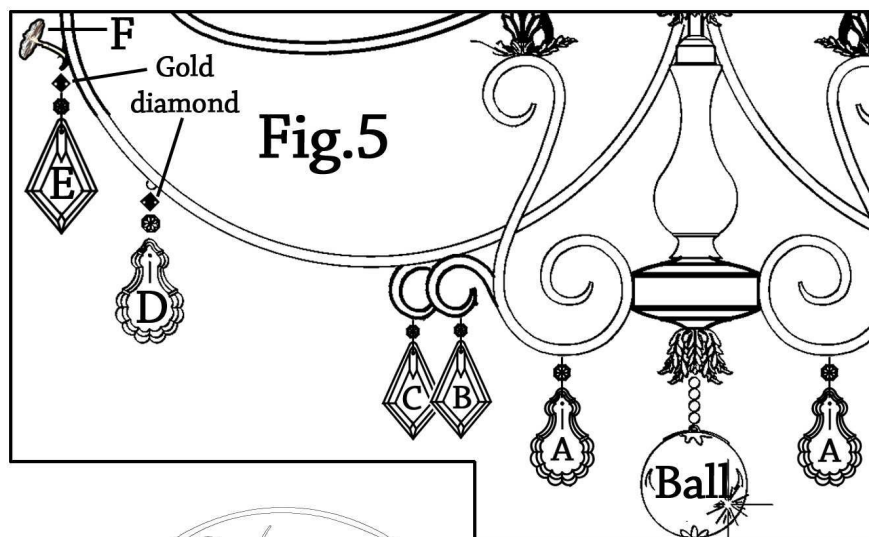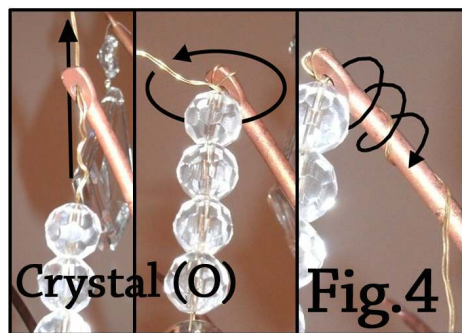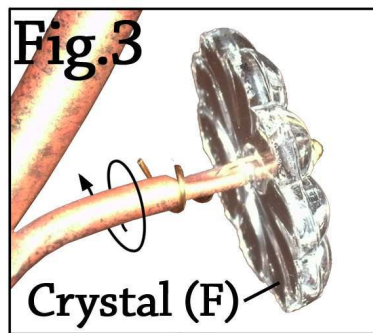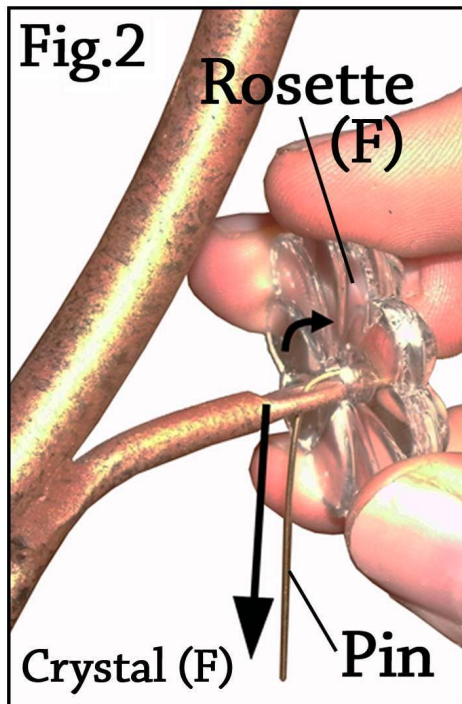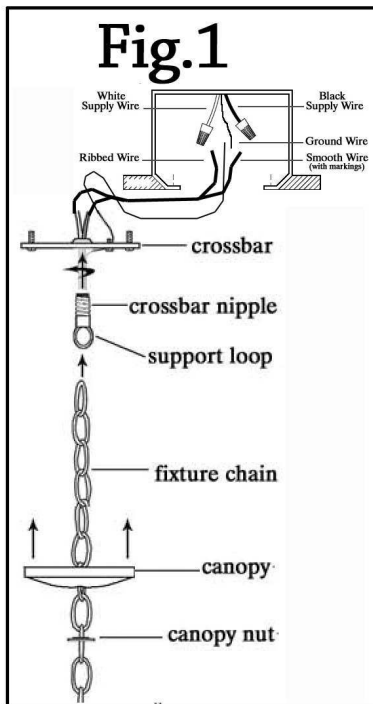

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET


visit us on the web at www.meyda.com

THIS FIXTURE WEIGHS OVER 100 LBS.

0700 12/7/15

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR # 169772

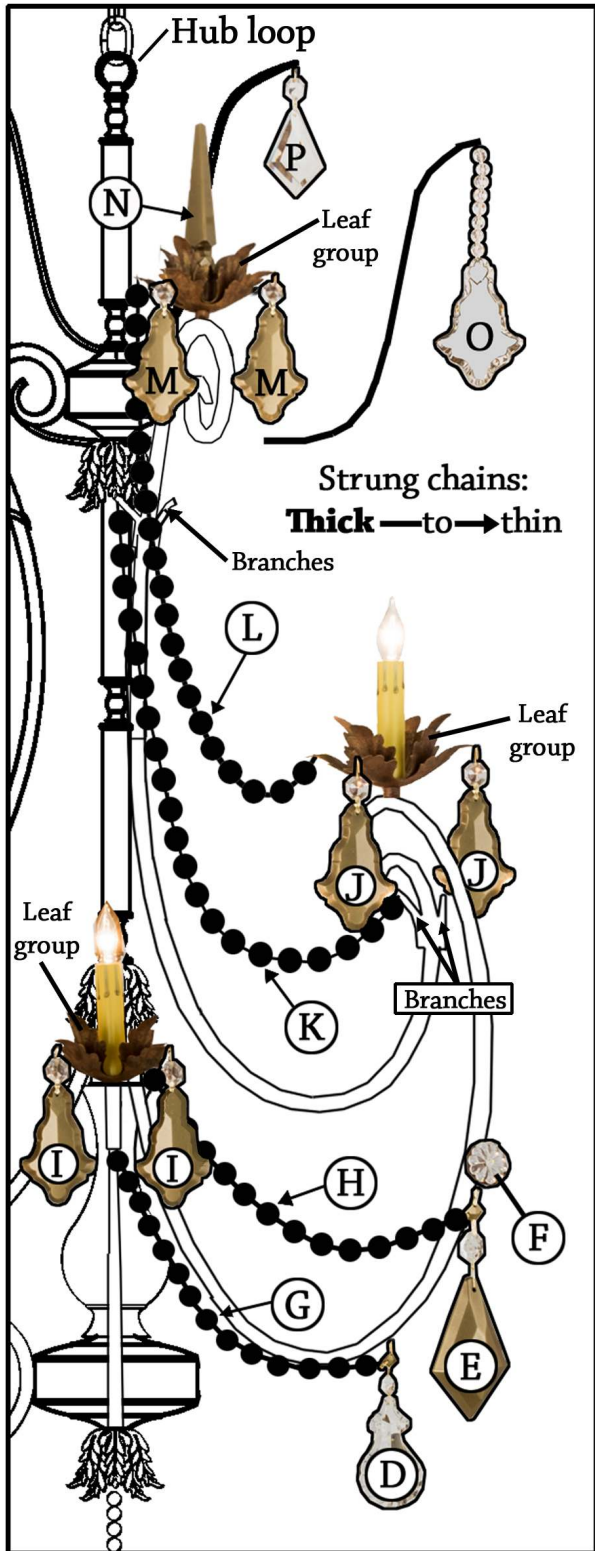

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

When placing strung crystal remember the thick side of the chain is always toward the center.

Steps 14-19 See Diagram on this page.

14.)The thick side of "L" will be connected to either side of the spire(N) on the back leaves. The thin side of "L" will be connected to either side of the higher candle, on the back leaves (behind crystal J).

15.)The "J" crystals, will be placed on either side of the higher candle's front leaves.

16.)Attach the rosette(F) crystals. To do so you must send the pin straight down through the hole. Hold the bottom of the pin, and tilt the rosette forward so that the pin rests on the metal. This will ensure the crystal will stay pointed where you want it, and not stray.(See Pg.1 Fig.2) Holding the rosette still in place, wrap the hanging pin around the metal.(See Pg.1 Fig.3)

17.)Crystal E & D will be next, these will both have a small gold diamond shaped crystal which is for attaching crystal chains to.

18.)You may place G & H strung crystal chains at this time. Chain G will connect under the arm in which you will place "I". This spot will have two G's connected to it. The other side of G will connect to the gold diamond on "D" crystal. This gold diamond will hold two G's on either side of it. Connect "H" strung crystal, the thick side will connect to the leaves behind "I" crystals, on either side of the candle. The thin side will connect to the gold diamond on crystal "E". This diamond will have two "H" crystals on either side of it.

19.)Connect crystal "I" next, which will be hung from the lower candle. Connect them at the front leaves on either side of the candle.


Steps 20-22 See Pg.1 Fig.5

20.)Follow that with B & C which will be at the same level. It will be C then B then C etc... around in a circle.

21.)Attach crystal A.

22.)The Crystal ball will have a half ball finial that you will screw in to the bottom of the chandelier.

23.)Bulb your fixture, power on, enjoy your new fixture!

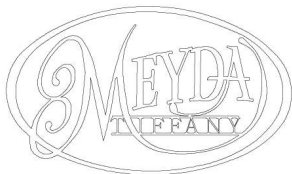

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com