


ASSEMBLY INSTRUCTIONS FOR # 170911




IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION


CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach ceiling bracket to ceiling not J-Box.
- 2.) Run your electrical wires through the check rings & threaded rod. Position your check rings so that on top of the shade they are as a cup would be. Top check rings will be opposite of this. Screw threaded rod into the top of your fixtures shade. Slide downrod sleeves onto threaded rods so that they sit in the check rings. Cap off sleeve(G) with top check ring.(F) Place canopy(C) onto threaded rod(E) and let rest on the top check rings. Place spider washer(B) onto threaded rod and screw nuts(A) on, securing canopy to fixture.
- 3.) Raise fixture to ceiling, connect all electrical wires as per your local codes.
- 4.) Slide canopy onto the two bolts pointing down from canopy bracket. Secure in place with the two canopy nuts provided.(D)
- 5.) Bulb your fixture, place diffusers, power on, enjoy!

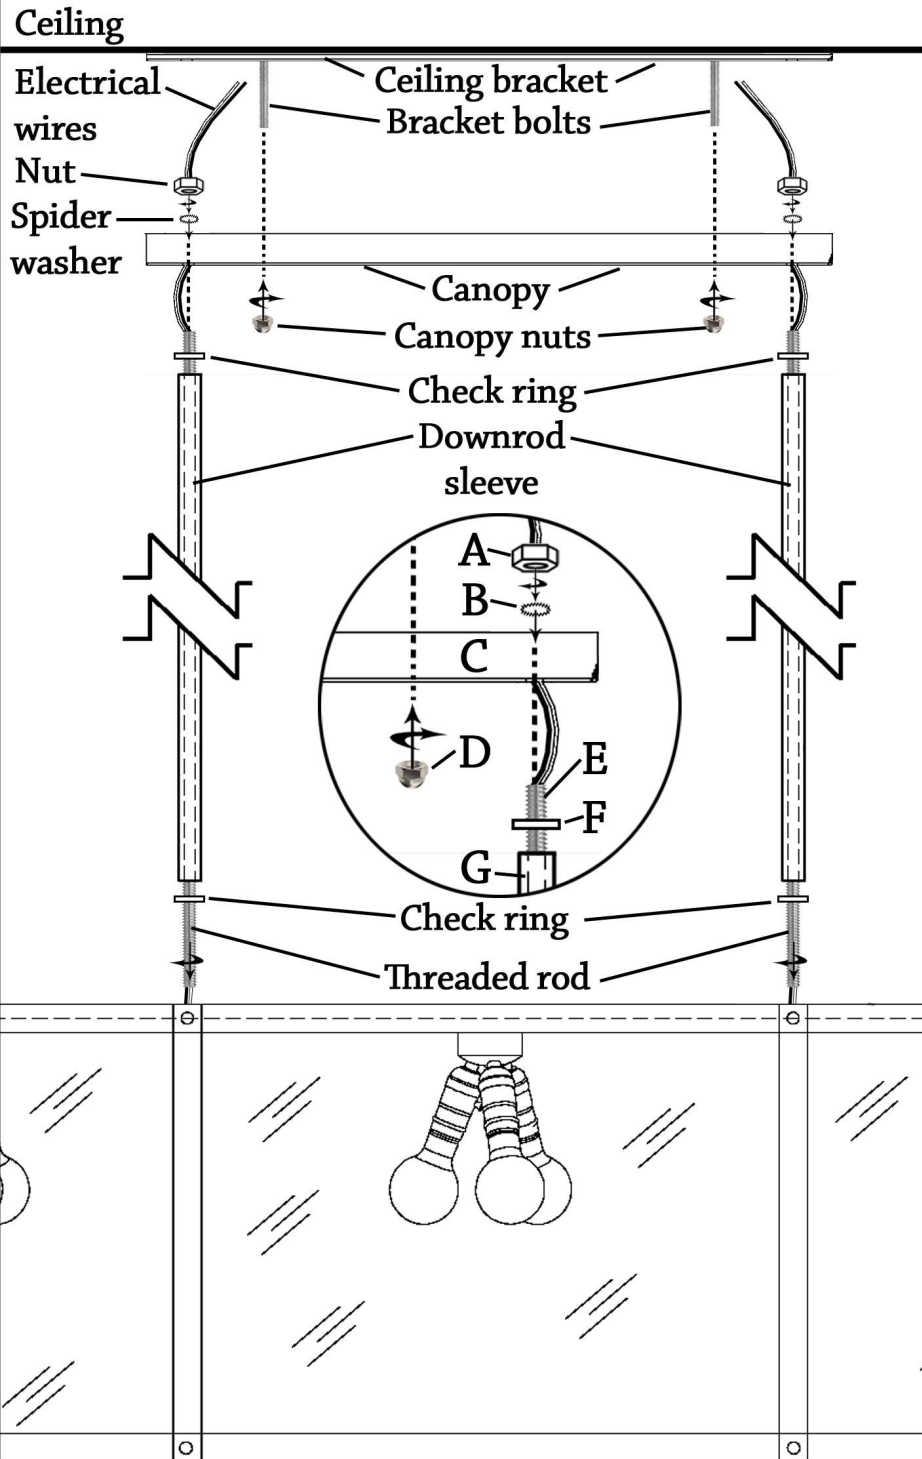

Adjust overall height by cutting equal amount of measured lengths of the sleeve and threaded rod.
E.g: to take off an inch, cut an inch off of both threaded rods and an inch off of both sleeves.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com