

ASSEMBLY INSTRUCTIONS FOR #171146

Fig.1


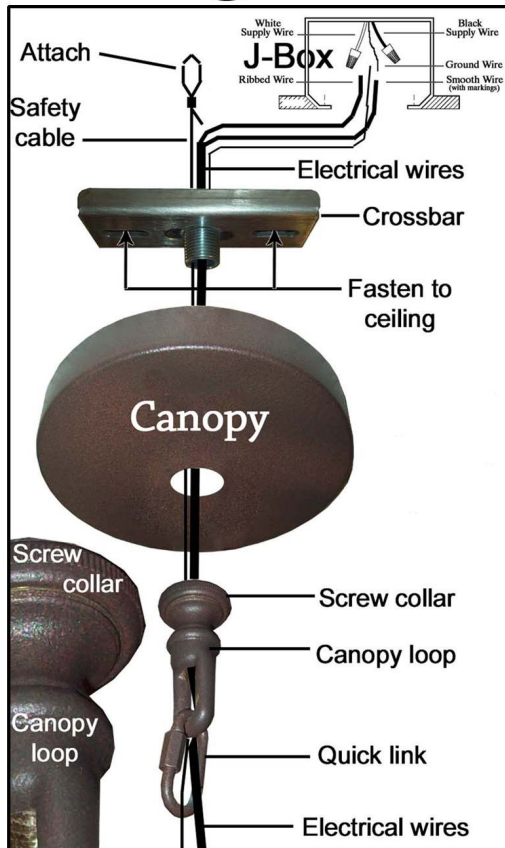


Fig.2

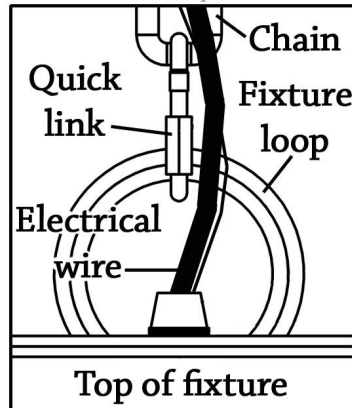

IMPORTANT



TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach crossbar to secure location in ceiling. There should be a small threaded pipe screwed into the center of crossbar, ready to receive canopy loop. Screw your canopy loop onto this threaded pipe.(Fig.1)
- 2.) Determine length of chain to add, add your chain to the top of your fixture by using the quick link.(Fig.2) Slip your screw collar onto the chain followed by the canopy.(Fig.1)
- 3.) Attach the top of your chain to canopy loop using the quick link. Run your safety cable & electrical wires through the screw collar, canopy & then up the length of chain.(Fig.1)
- 4.) Connect safety cable to a secure location in ceiling and connect all electrical wires as per your local codes. Slide canopy up to crossbar followed by screw collar and screw the collar up onto the canopy loop, making canopy flush with ceiling.(Fig.1)
- 5.) Apply a line of silicone into the shade ring and slide shade down into this silicone.(Fig.3) Bulb your fixture (bulbs provided by others), power on, enjoy your new fixture!

Fig.3

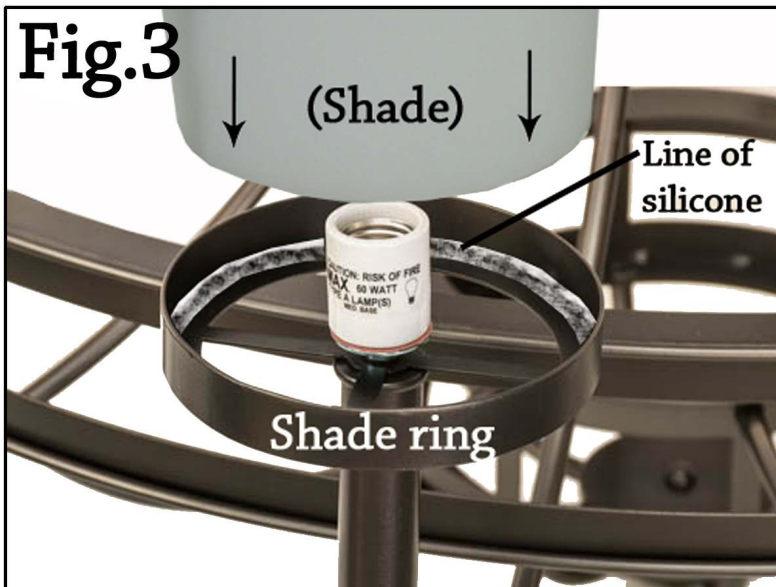

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com