


ASSEMBLY INSTRUCTIONS FOR #173164

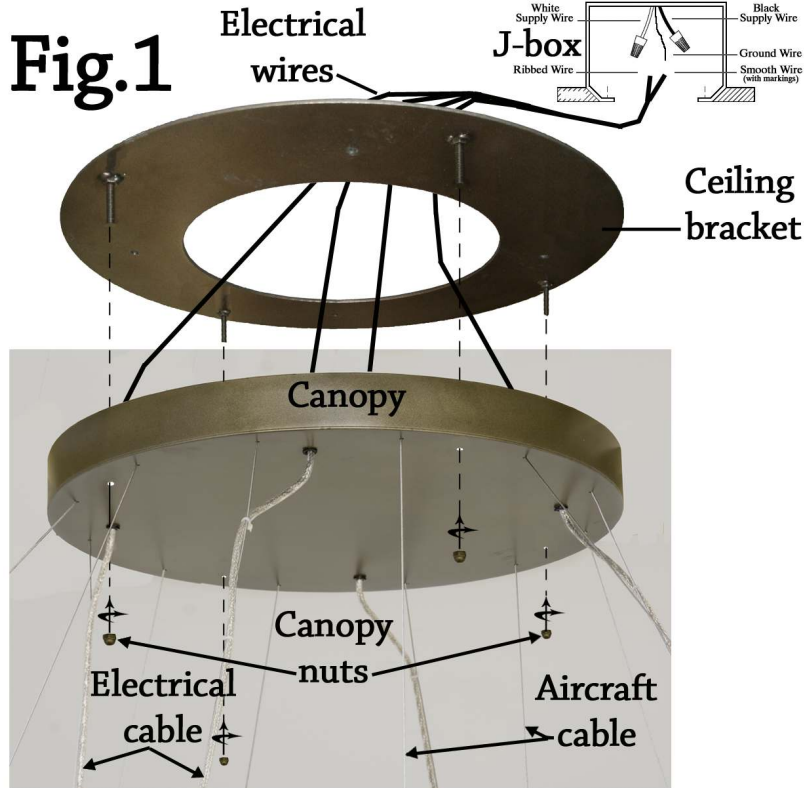


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION


CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.)To ease setup you may want to remove the wood from crate containing your fixture, and then cut away cardboard, leaving a circle under the rings of fixture. In this manner you may lift whole unit to the point of raising fixture.
- 2.)Attach ceiling bracket to ceiling, there will be four threaded bolts pointing down to receive canopy.
- 3.)Raise fixture to ceiling, lift canopy to ceiling bracket. Attach all electrical wires as per your local codes.
- 4.)Slide canopy up onto ceiling bracket, secure canopy by screwing the four canopy nuts onto the ceiling bracket bolts.
- 5.)Lower the rings slowly, as you do this the rings will stop at their various heights. You can adjust your rings position by using the cable grips. Push down on grip nut to let cable pass freely. Let go to grip, & screw tight. You may cut excess cable only when sure of position.(Fig.2)
- 6.)Power on, enjoy your new fixture!

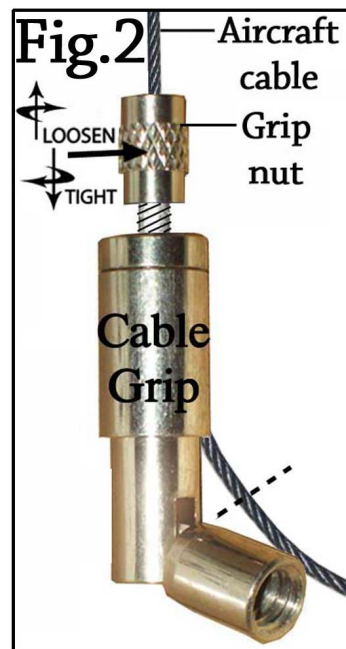

LOOK FOR WIRES LABELED
DIMMER: DIMMER NEUTRAL, DIMMER HOT,
POWER TO DRIVER: NEUTRAL, HOT



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com