


ASSEMBLY INSTRUCTIONS FOR #105525

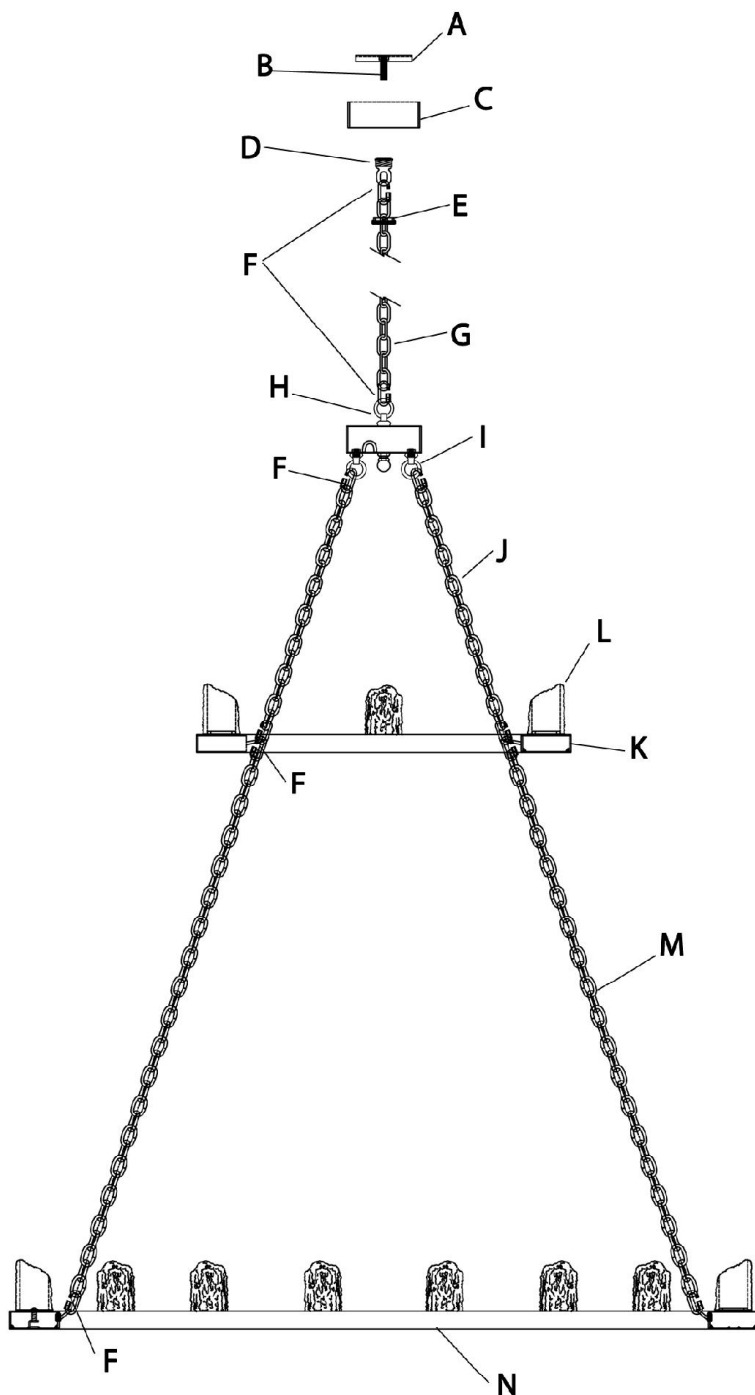

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Mount cross bar (A) to a secure location using customer supplied screws.
- 2.) Screw threaded nipple (B) into cross bar (A).
- 3.) Use quick link (F) to connect chain (G) to hub loop (H).
- 4.) Place canopy nut (E) then canopy (C) onto chain (G) and use quick link (F) to connect chain (G) to support loop (D).
- 5.) Wire as per local electrical codes, make sure the end of wire with the moxex plugs is hanging down.
- 6.) Place canopy onto threaded nipple (B), screw support loop (D) onto nipple (B), secure with canopy nut (E)
- 7.) Attach fixture chains (J) to hub loops (I) and top tier (K) using quick links (F).
- 8.) Connect moxex plugs at top tier (K).
- 9.) Repeat steps 7 - 8 to attach chains (M) to bottom tier (N).
- 10.) Install candle covers (L) and lights bulbs.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com