

ASSEMBLY INSTRUCTIONS

FOR ITEM#174999

Pg.1

BEFORE OPENING CRATE PLEASE READ INSTRUCTIONS COMPLETELY! VERY IMPORTANT! PLEASE READ & ADHERE TO THE RED WARNING SIGNS PRINTED & PLACED ON FIXTURE! GREEN SIGNS POINT OUT METAL RING THAT IS SAFE TO HANDLE. FOLLOW DIRECTIONS FOR REMOVAL OF FIXTURE FROM CRATE! ONLY REMOVE WOOD FROM CRATE WHEN FIXTURE IS READY TO BE CARRIED TO INSTALLATION, AND INSTALLED! BE CAREFULL WHEN REMOVING CUSHIONING FROM WITHIN & OUTSIDE THE CRYSTAL AREAS! THE BAGS MAY SNAG THE CRYSTAL PINS PULLING THEM LOOSE!

THIS FIXTURE WEIGHS OVER 90 LBS.

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.



"A Commitment to Excellence in Lighting and Service"


CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

REMOVAL FROM CRATE INSTRUCTIONS FOR #174999

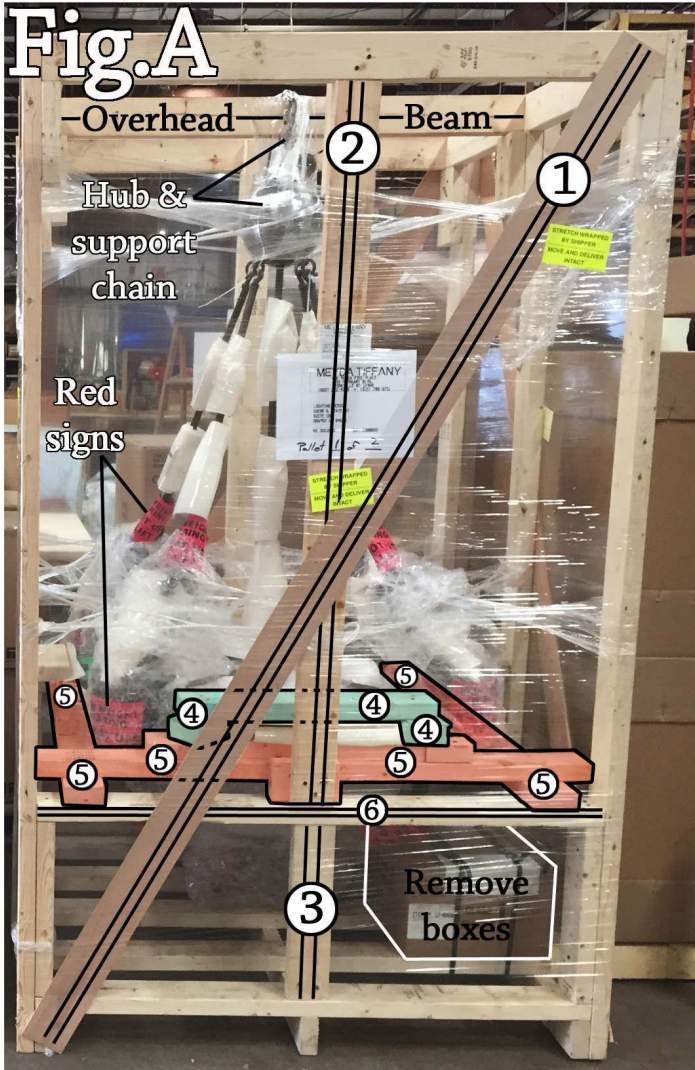

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

Refer to Fig.A for proper removal of crate's boards.

1.) Remove shrink wrap from around crate. Remove boxes from below fixture, these will contain canopy & chain, as well as extra crystal & touch up paint. Set up your ceiling hardware ahead of time! (Pg.3, Fig.1 & Step.1 Do this now.)

2.) Remove board 1 from all sides. Remove boards 2, & 3 from only one side. Remove board group 4 (highlighted in blue) from all sides of crate.

3.) Once you remove group 5 from all sides, fixture is supported by overhead beam. Before removing group 5 you should be ready to bring fixture to ceiling and connect to chain straightaway. (See Pg.3, Step 1 & Fig.1 to prepare ceiling/hardware) Remove shrink wrap from around hub & overhead beam. Remove board group 5 from all sides and board 6 from same side as 2 & 3 (removed). Immediately lift fixture by the appropriate handling areas (See Fig.C & D) while someone unscrews the quick link (Fig.B), and unlinks the support chain from overhead beam. (Fig.A) Carry the fixture to the point of attaching to the chain. (Refer to 3rd page of instructions Step 2 and Fig.1.) Remember canopy goes on chain with collar ring below it. (Fig.1)

Fig.B

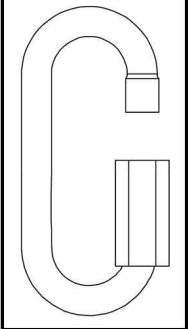


Fig.C


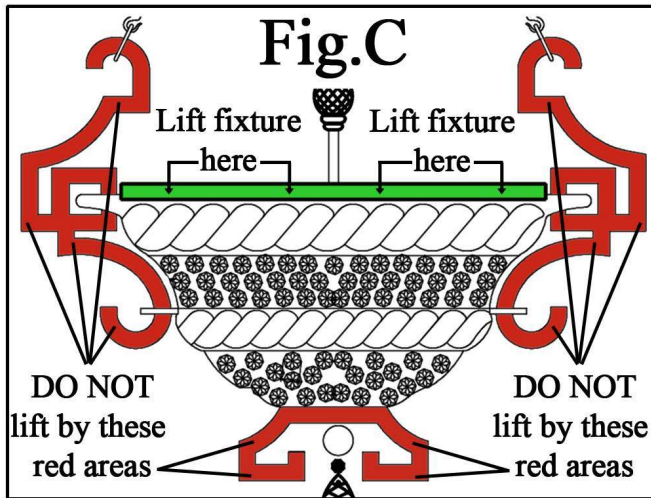


Fig.D

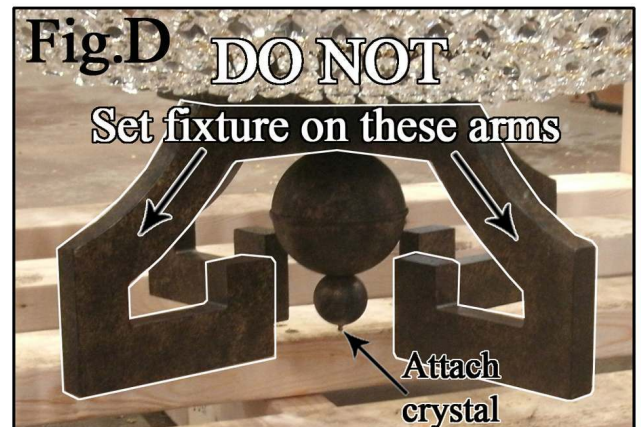

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com

THIS FIXTURE WEIGHS OVER 90 LBS.

0700 08/01/16

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #174999



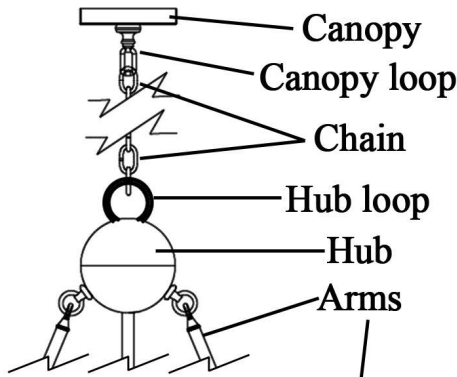


Fig.3

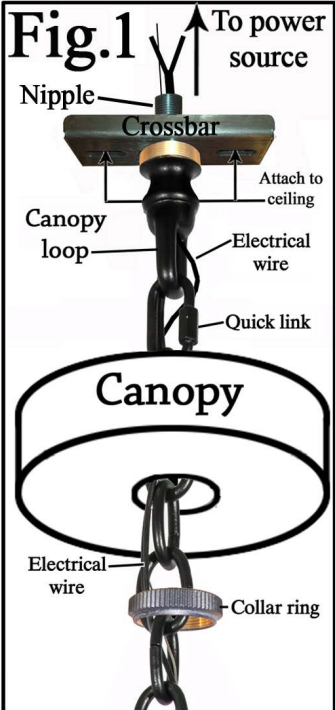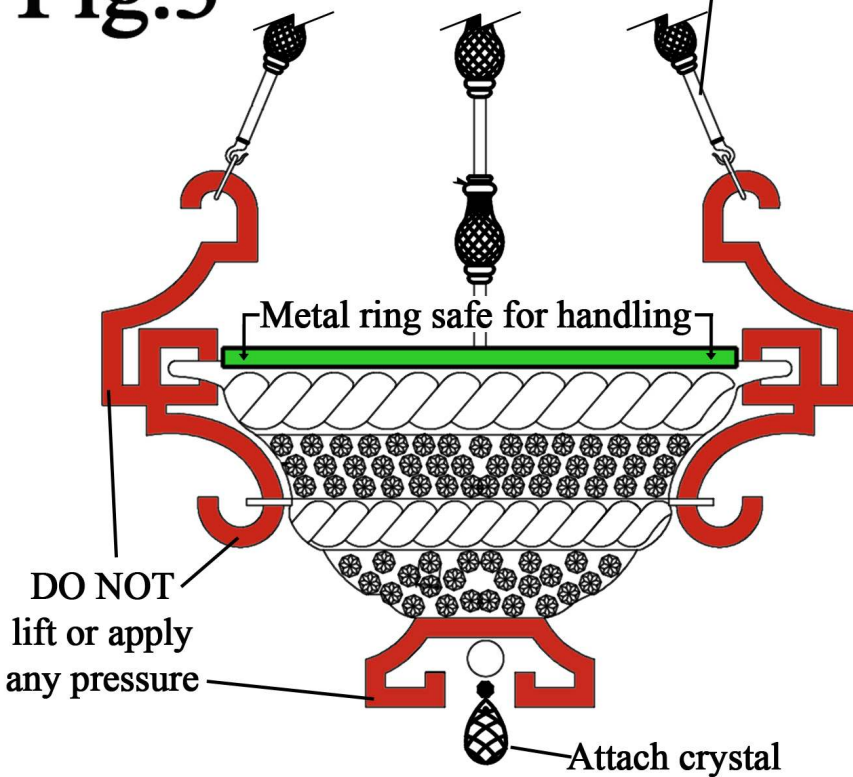


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

VERY IMPORTANT! DO NOT LIFT FIXTURE BY THE DECORATIVE ELEMENTS! (FIG.3) READ RED & GREEN SIGNS! (FIG.2) LIFT THE FIXTURE BY THE METAL RING ABOVE TOP TIER OF CRYSTAL! (FIG.3) DO NOT SET WEIGHT OF FIXTURE ON DECORATIVE ARMS! (FIG.3&D) ALSO BE CAREFULL WHEN PULLING BAGS OF CUSHIONING (FROM WITHIN & OUTSIDE THE CRYSTALS) SO THAT YOU DO NOT SNAG CRYSTAL PINS, PULLING THEM LOOSE! (FIG.2)

- 1.) Attach crossbar to ceiling, be sure you have the canopy loop attached and pointing down ready to receive canopy. (Loop is attached with a nipple run through crossbar and secured with a lock washer & nut above crossbar. Attach appropriate amount of chain to canopy loop.(Fig.1)
- 2.) Attach fixture to bottom of chain. Be sure you have the canopy on the chain with the collar ring below it. (Fig.1) Remove protective cushioning from within the crystal areas as well as the outside of crystals. Be careful not to snag crystal pins so that you do not pull the pins loose. Remove all of the protective cushioning around fixture including the arms.
- 3.) Run the electrical wires up the length of chain through the collar ring, canopy, & canopy loop. Connect all electrical wires as per your local code. Slide canopy up the chain and secure flush to ceiling by screwing collar ring onto canopy loop.(Fig.1) Attach bottom crystal. (Fig.3) Inspect your fixture and apply any touch ups needed to the finish, using the touch up paint provided. (Touch up paint has been included for your convenience if fixture gets scratched during installation.) Apply the gold first, bronze second and black last.
- 4.) Bulb your fixture, (bulbs provided by others). Power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com