


ASSEMBLY INSTRUCTIONS FOR #106019 (58167-1)

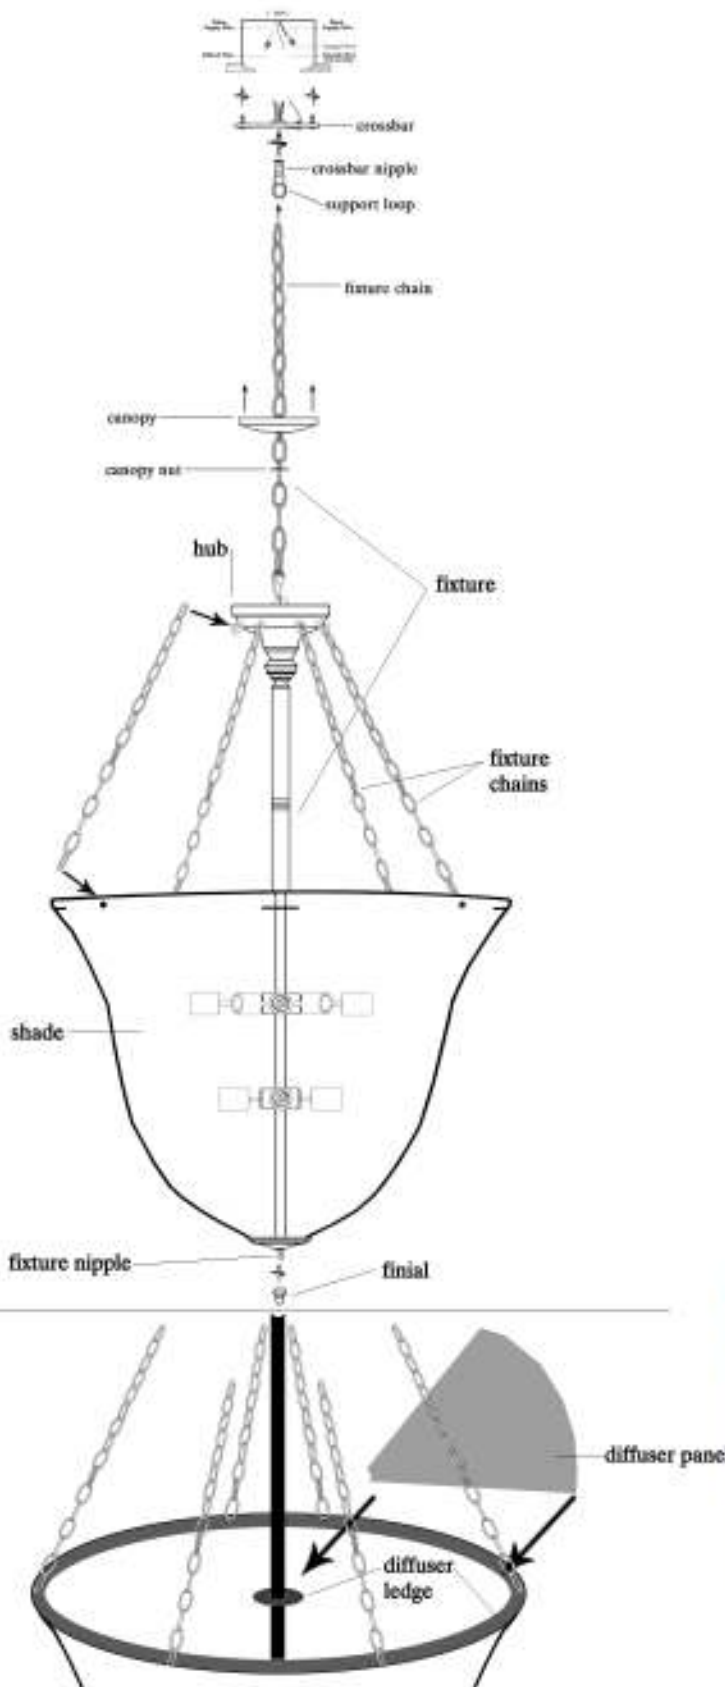


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Attach crossbar to j-box. FIG.A
2. Attach fixture to crossbar as shown. FIG.A
3. Wire as per local electrical code.
4. Place shade up and onto fixture, attach fixture chains to hub.FIG.A
5. Attach fixture chains to shade.FIG.A 5a. When attaching chains you may need to turn the hooks to the right as seen in Fig.3 fit them on. Once chain is on, turn hooks back to pointing outwards as in Fig.2.
6. Screw finial onto fixture nipple.FIG.A
7. To change light bulbs, remove diffuser panels from shade as shown. FIG.B
8. To remove diffuser panels, turn diffuser panel on edge and lift through fixture chain. When light bulbs have been replaced, place diffuser panel on edge, place through fixture chains and seat onto diffuser ledge. FIG.B

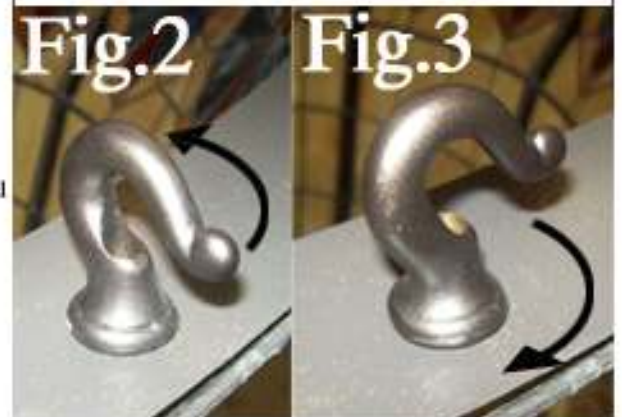

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com