


THIS FIXTURE WEIGHS OVER 50 LBS.

0700 09/30/16

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #178075

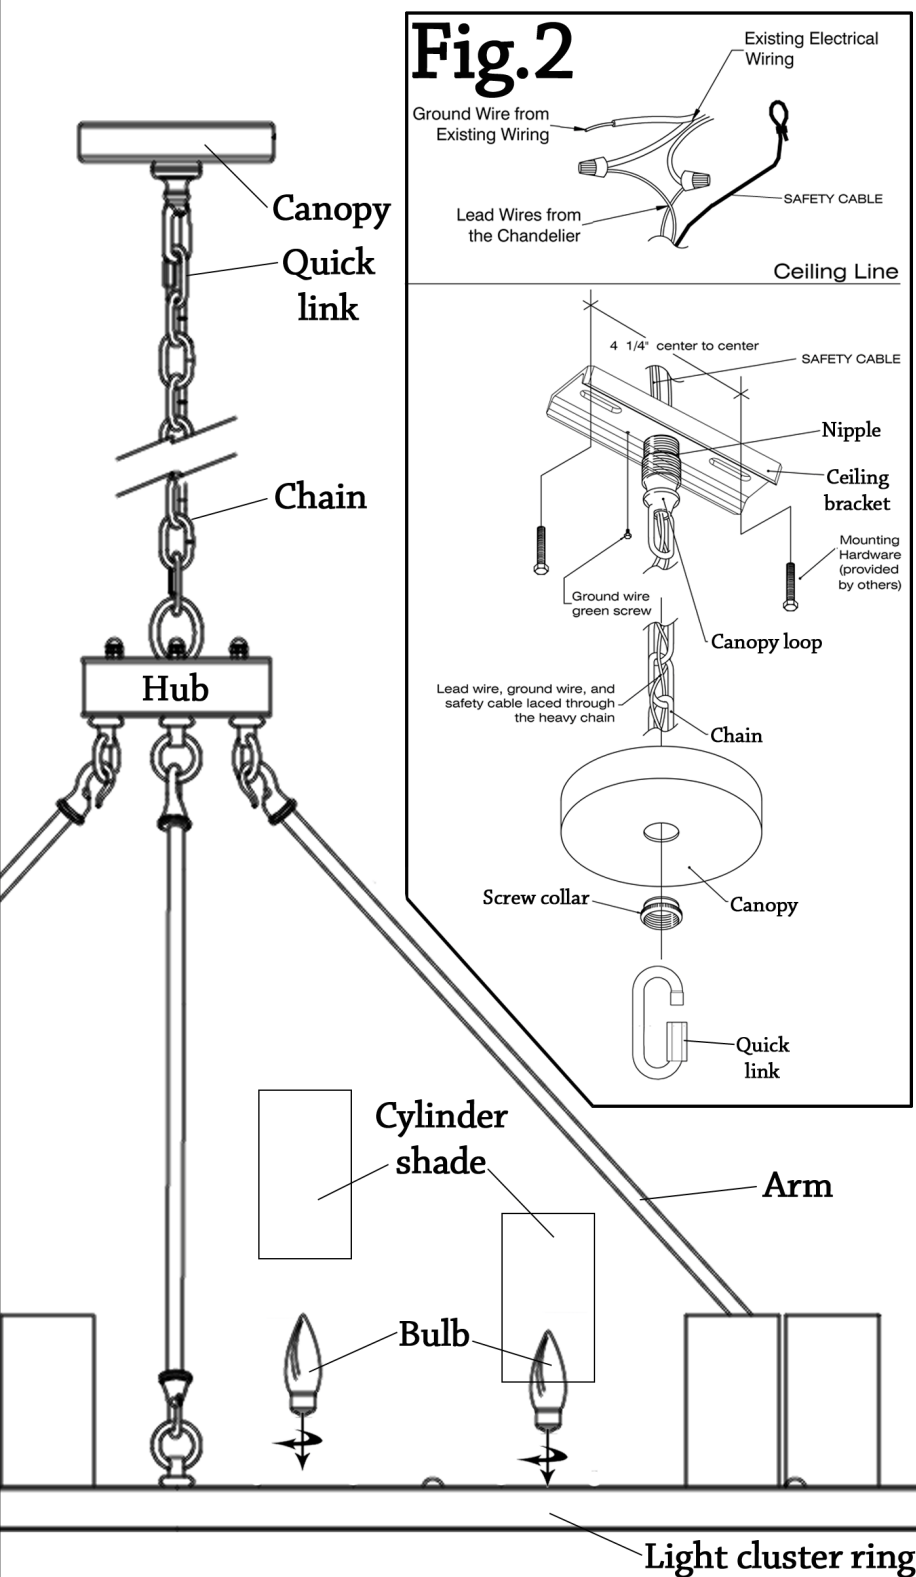



IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Connect the appropriate amount of chain to the hub (Fig.1) and place the screw collar & canopy onto the chain. (Fig.2).
- 2.) Your ceiling bracket assembly will be the canopy loop screwed onto the nipple which is run through the ceiling bracket and secured on top of bracket with a nut. Connect the other end of chain to the canopy loop. (Fig.2)
- 3.) Run your electrical wire up the length of the chain, along with the safety cable. Raise ceiling bracket to ceiling, attach bracket to ceiling. Connect safety cable to a secure hold. Connect electrical wires as per your local electrical code.
- 4.) Slide canopy up to ceiling, and secure flush to ceiling by screwing screw collar onto the canopy loop. (Fig.2)
- 5.) Attach the arms if not already. Connect any quick plugs (Fig.3) at the hub & arm connection.
- 6.) Raise light cluster ring to arms and hook ring onto the arms. Connect any quick plugs (Fig.3) at the arm/ring connections. Bulb your fixture, (bulbs provided by others). Place cylinder shades.
- 7.) Power on, enjoy your new fixture!

Fig.3 Quick connect plugs

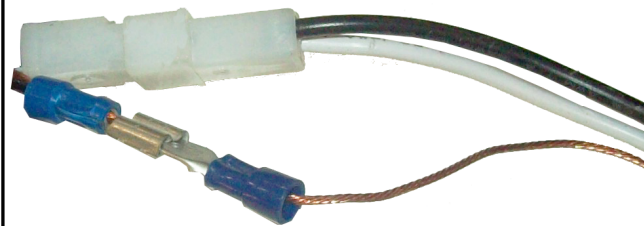

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com