

THIS FIXTURE WEIGHS OVER 120 LBS.

0700 07/11/16

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR # 179542

IMPORTANT






TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1.) Determine the center location of your fixture. Measure out in four directions at 90° apart. With the center of your measurement placed at the center of your fixture, you should have a measurement of $73 \frac{5}{8}$ " wide. The outer edge (furthest from center) of your canopies will be on the $73 \frac{5}{8}$ " marks. (Fig.1)

2.) Attach your ceiling brackets to ceiling. (Fig.2) When you do so, be sure bracket bolts are positioned properly so that the canopy loop will allow the arm directions. (Fig.3)
3.) See Fig.2, Hook your quick plug side of arms onto the arm loops located on top of ring. To do this you need point the top of arm towards the center of fixture (Step1). Now swing the arm outwards away from fixture (Step2). Raise fixture ring to ceiling, run arm's electrical wire through canopy, & hook top of arm onto canopy (Step3). Connect electrical wires as per your local codes. Slide canopy up onto the bolts pointing down from ceiling bracket. Secure canopy flush to ceiling using the (4) double canopy nuts provided. (Fig.4) Repeat for other three arms.

4.) Hook your shades onto the shade loops, connect the quick plugs, and zip tie the wires under the shade's support bar. (Fig.5)
5.) Bulb your fixture (bulbs provided by others), power on, enjoy your new fixture!

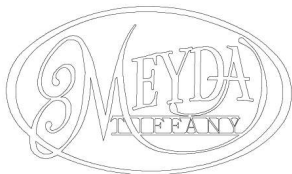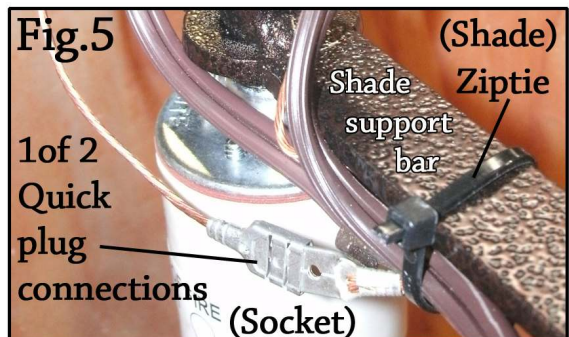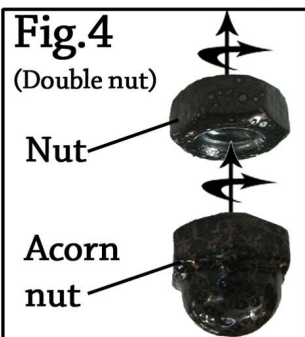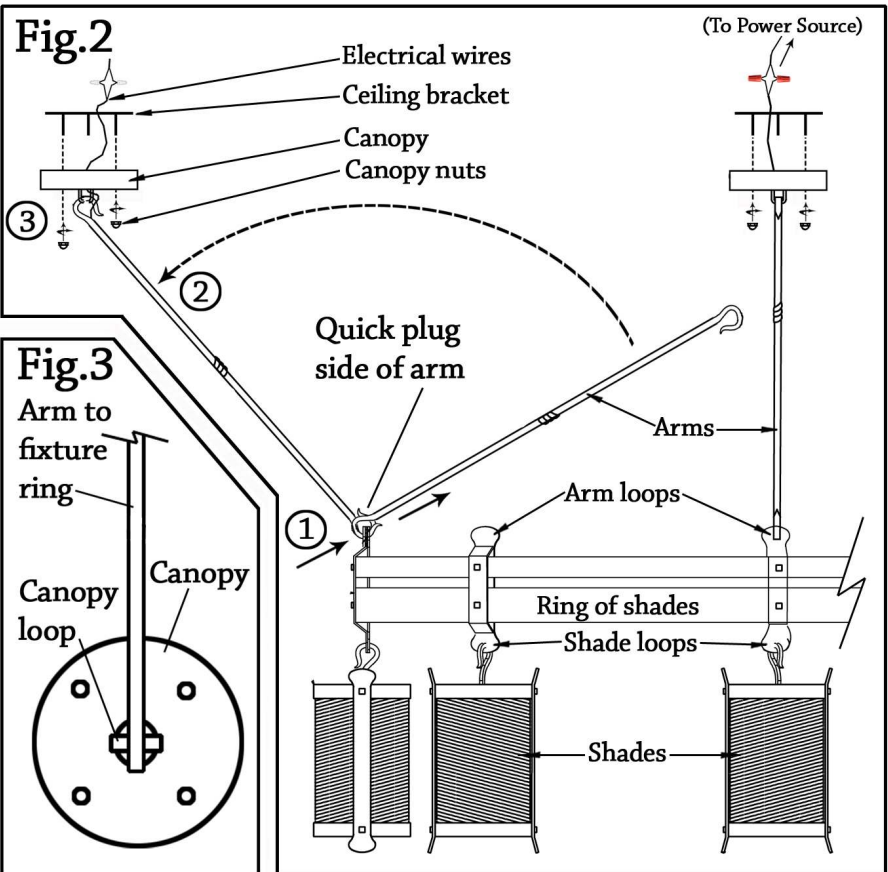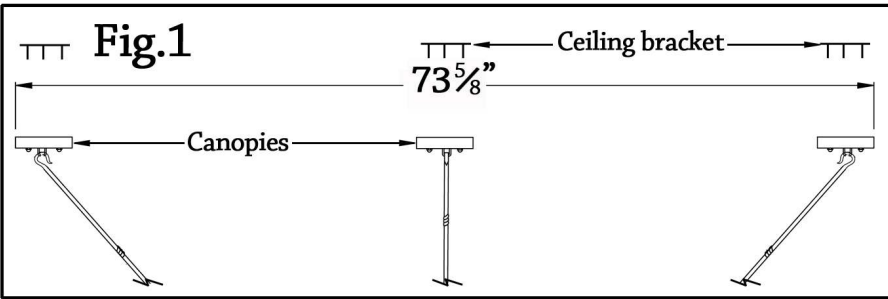

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com