
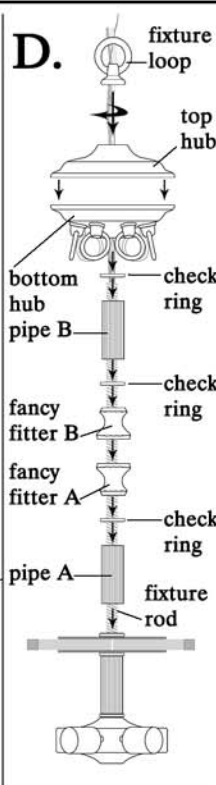






# ASSEMBLY INSTRUCTIONS FOR #109969 (TR868-36-1-M358)

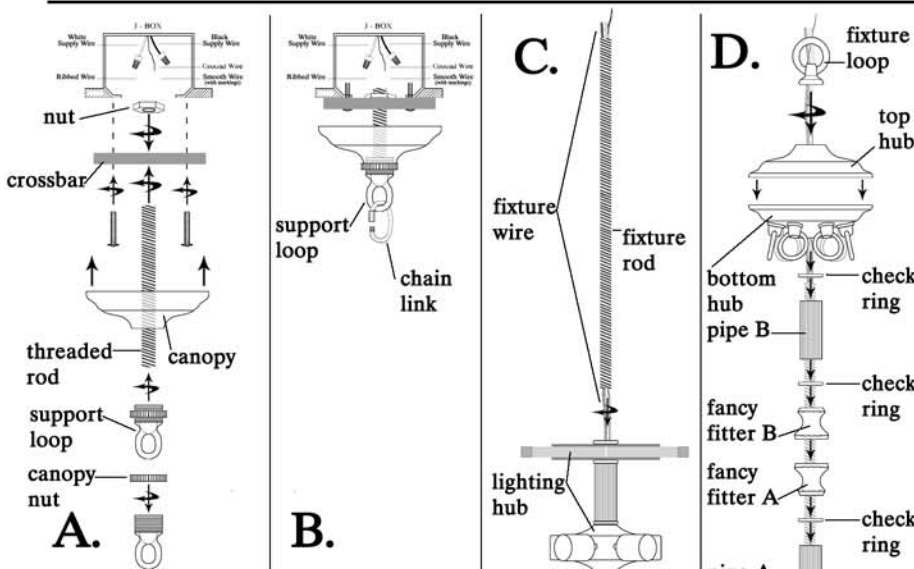

**IMPORTANT**  
TURN OFF THE POWER AT THE MAIN  
FUSE OR CIRCUIT BREAKER BOX  
BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL  
PARTS BEFORE ASSEMBLY. BULBS ARE  
NOT INCLUDED

1. Screw threaded rod into crossbar, screw nut onto threaded rod, screw crossbar into J-box. FIG.A
2. Place canopy up & onto threaded rod. FIG.A
3. Screw support loop w/canopy nut onto threaded rod, place chain link onto support loop FIG.A & FIG.B
4. Place fixture wire through fixture rod, screw fixture rod into lighting hub and tighten. FIG. C
5. Place pipe A, check ring, fancy fitter A, fancy fitter B, check ring, pipe B, check ring, bottom hub and top hub onto fixture rod, screw fixture loop onto fixture rod and tighten. This will be called the center rod. FIG.D
6. Attach center rod to chain link, close link. Screw canopy nut down and off canopy loop, let canopy slide down, wire as per local electrical code. FIG.E
7. Slide canopy up to ceiling and secure with canopy nut. FIG.F
8. Place fixture arm onto hub loop. repeat for remaining arms. FIG.G
9. Screw nut onto finial rod, place down through vase cap, screw finial onto finial rod and tighten. FIG.H
10. Place fixture arm loop onto support rod screw, screw acorn nut onto support rod screw and tighten, repeat for remaining arms. FIG.I

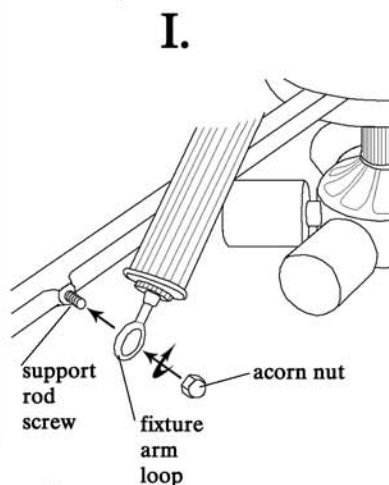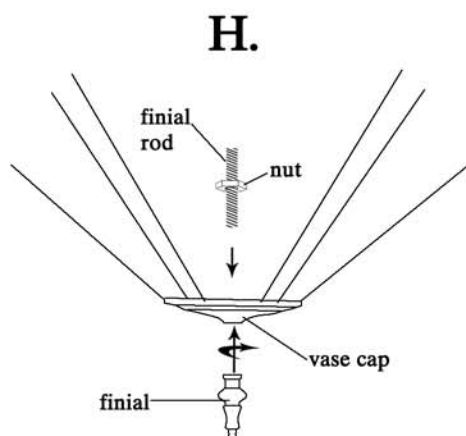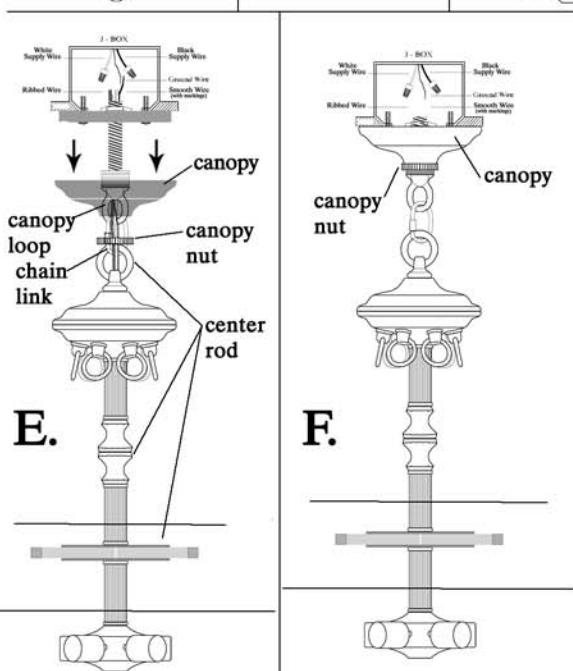



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)





# ASSEMBLY INSTRUCTIONS FOR #109969 (TR868-36-1-M358)

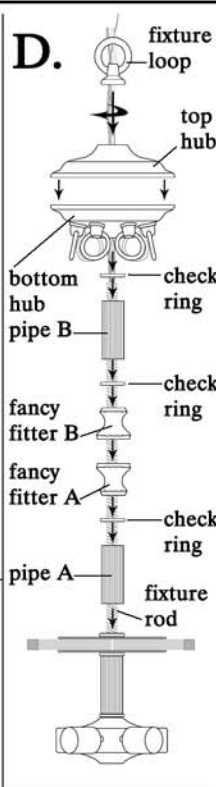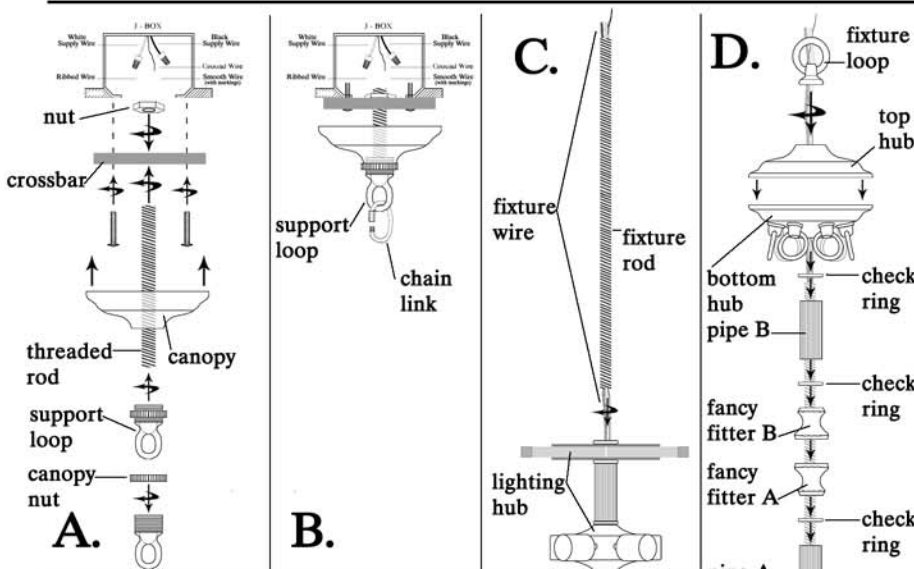

**IMPORTANT**  
TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Screw threaded rod into crossbar, screw nut onto threaded rod, screw crossbar into J-box. FIG.A
2. Place canopy up & onto threaded rod. FIG.A
3. Screw support loop w/canopy nut onto threaded rod, place chain link onto support loop FIG.A & FIG.B
4. Place fixture wire through fixture rod, screw fixture rod into lighting hub and tighten. FIG. C
5. Place pipe A, check ring, fancy fitter A, fancy fitter B, check ring, pipe B, check ring, bottom hub and top hub onto fixture rod, screw fixture loop onto fixture rod and tighten. This will be called the center rod. FIG.D
6. Attach center rod to chain link, close link. Screw canopy nut down and off canopy loop, let canopy slide down, wire as per local electrical code. FIG.E
7. Slide canopy up to ceiling and secure with canopy nut. FIG.F
8. Place fixture arm onto hub loop. repeat for remaining arms. FIG.G
9. Screw nut onto finial rod, place down through vase cap, screw finial onto finial rod and tighten. FIG.H
10. Place fixture arm loop onto support rod screw, screw acorn nut onto support rod screw and tighten, repeat for remaining arms. FIG.I

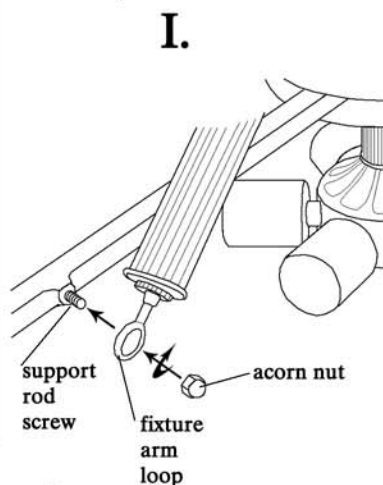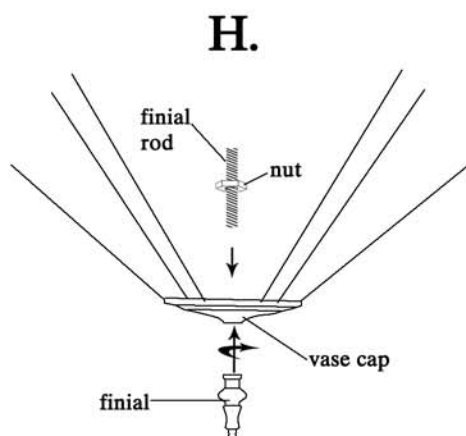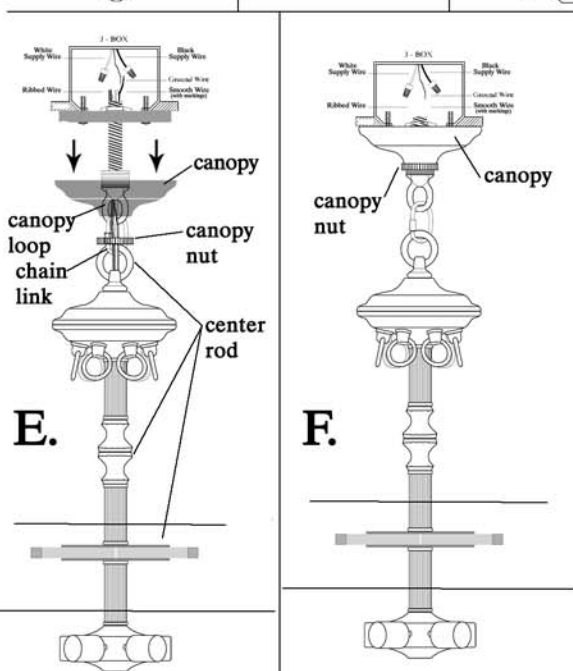

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)