


# ASSEMBLY INSTRUCTIONS FOR #110225 (M65-59034-2)

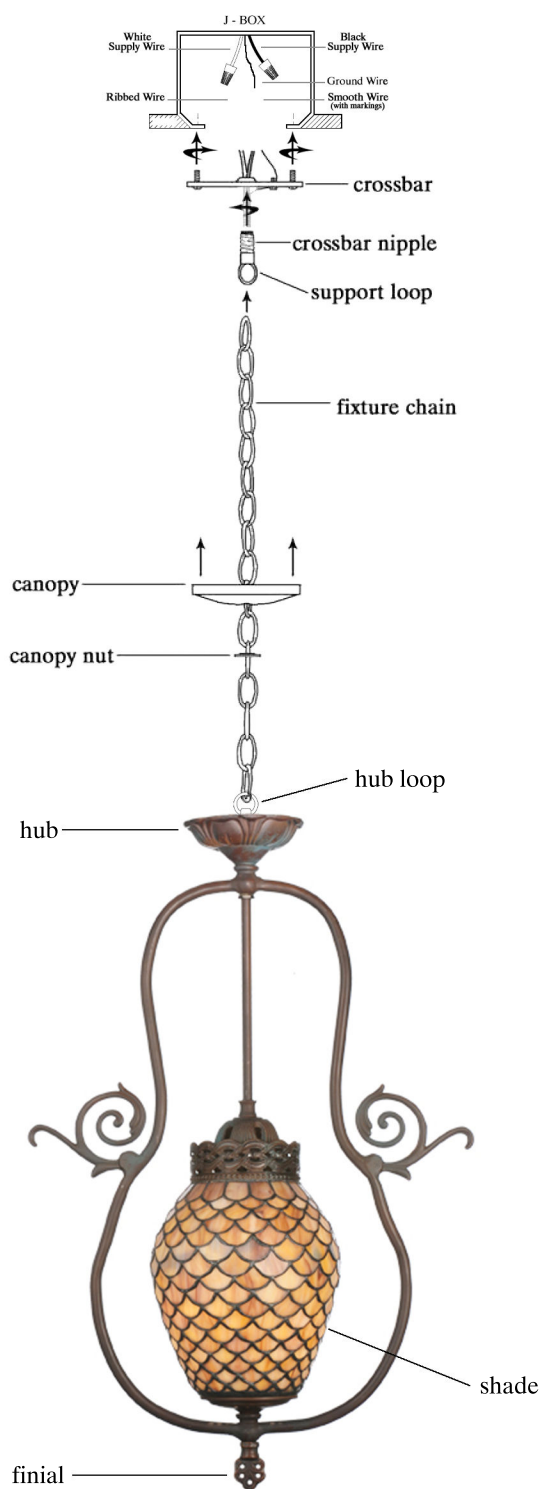

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Attach crossbar nipple with support loop to crossbar.
2. Attach crossbar to j box.
3. Attach fixture chain to hub loop.
4. Place canopy nut than canopy on to fixture chain as shown.
5. Attach fixture chain to support loop.
6. Wire as per local electrical code.
7. Slide canopy up to ceiling, screw canopy nut onto crossbar nipple and tighten to canopy.
8. To replace light bulb, unscrew finial, slide shade up, replace bulb, slide shade down and tighten finial.



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)