


ASSEMBLY INSTRUCTIONS FOR #110345 (33178-8)

Lag Bolt

FIG.B

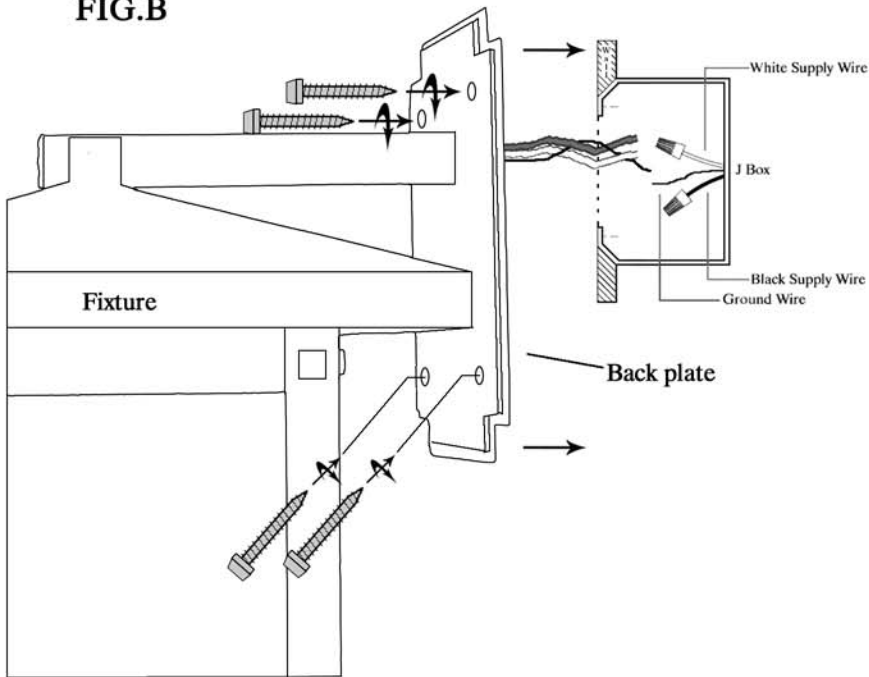

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION


CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Wire as per local electrical code.
2. Apply silicone caulk sealant to the back of the fixture back plate, make sure to seal all four sides. FIG. A
3. Bolt fixture to structure framing with Lag Bolts (provided). FIG.B

FIG.C



FIG.A

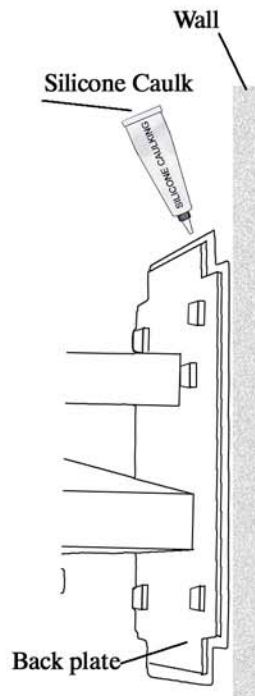

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com