


**THIS FIXTURE WEIGHS OVER 100 LBS.**

0700 11/29/16

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

## ASSEMBLY INSTRUCTIONS FOR #185532

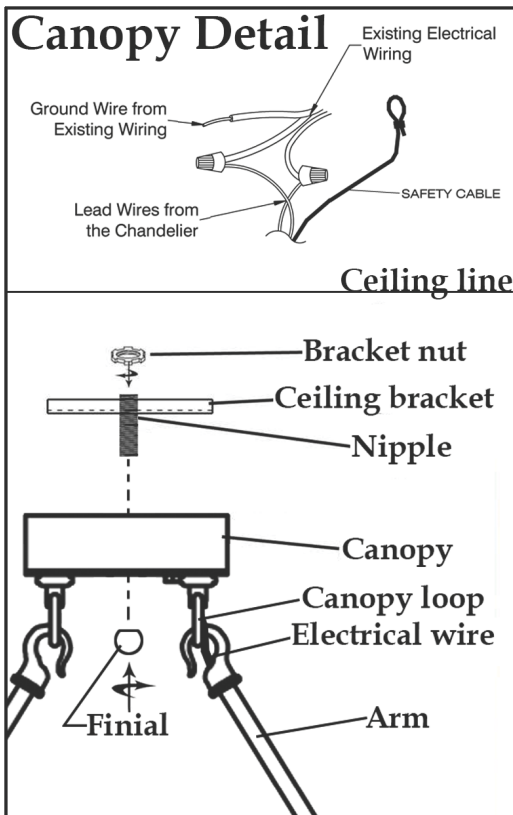


### IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION



CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach your ceiling bracket to ceiling. Be sure there is a nipple attached to the bracket, held in place with a bracket nut on top. (Canopy Detail)
- 2.) Hook the bottom of the arms to the light cluster ring, and then to the canopy as seen in main diagram.
- 3.) You can connect light ring to fixture before or after canopy is connected to power & ceiling. Whole fixture: raise canopy, arms, light cluster ring to the ceiling, connect canopy's electrical wires as per your local electrical code. (Main Diagram) Connect also the safety cable to a secure location within the ceiling. Slide canopy up onto the nipple and secure canopy flush to ceiling by screwing the finial onto the nipple. (Canopy Detail) Canopy only: Same as last two sentences except: Connect canopy, then arms and finally the ring. (Main Diagram)
- 4.) Connect any quick plugs. (Quick Plug Detail)
- 5.) Bulb your fixture, (bulbs provided by others). Place your cylinder shades.
- 6.) Power on, enjoy your new fixture!

### Main Diagram

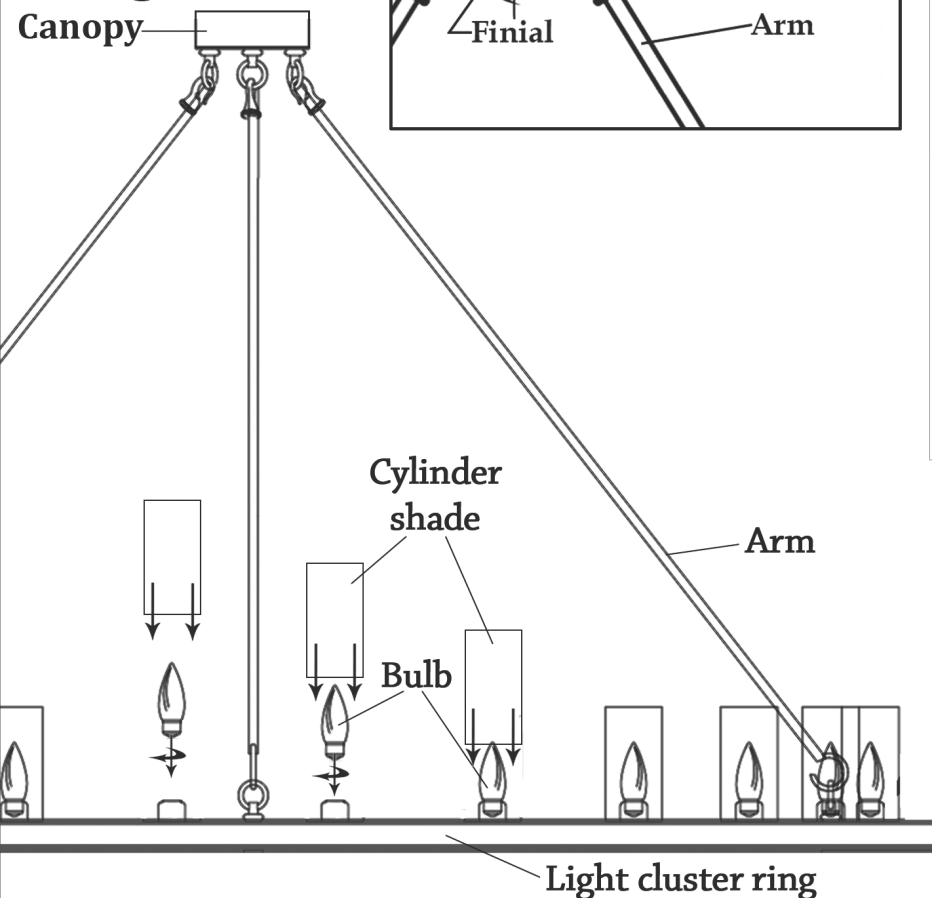

### Quick Plug Detail

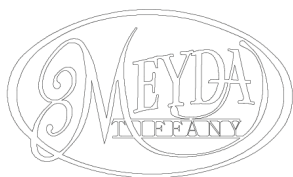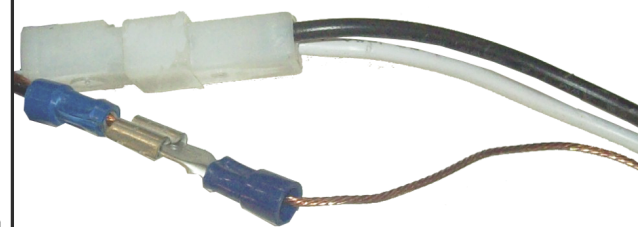

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)