

## ASSEMBLY INSTRUCTIONS FOR #110963 (Q45-26-4015-QISF-36-100)

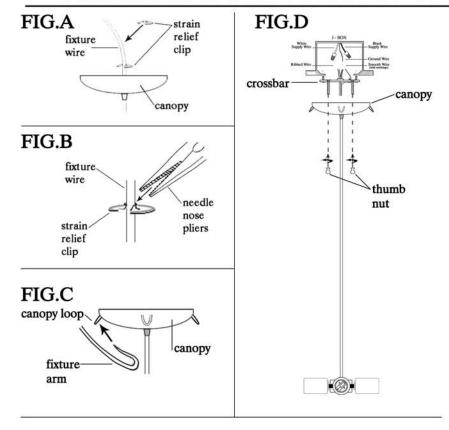

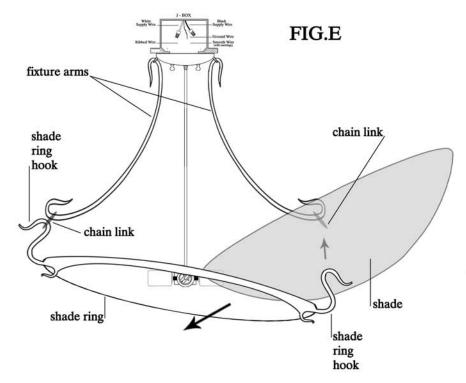

## **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION


CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED


- Refer to FIG.C. Place fixture arms through canopy loop as shown. FIG.C
- 2. Screw crossbar to j-box. FIG.D
- 3. Wire as per local electrical code.
- Place canopy with fixture arms up and onto canopy screws and attach with thumb nuts.FIG.D
- 5. Place chain links onto fixture arms as shown in FIG.E
- Place two shade ring hooks through chain links. (leave one shade ring hook unhooked).FIG.E
- 7. Place shade into shade ring.FIG.E (be sure to hold shade ring secure when placing shade into ring)
- 8. When shade is seated into ring lift shade ring and shade and attach remaining shade ring hook to chain link.FIG.E



"A Commitment to Excellence in Lighting and Service"

## ASSEMBLY INSTRUCTIONS FOR #110963 (Q45-26-4015-QISF-36-100)

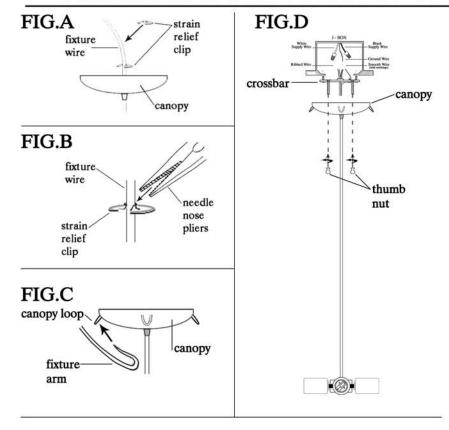

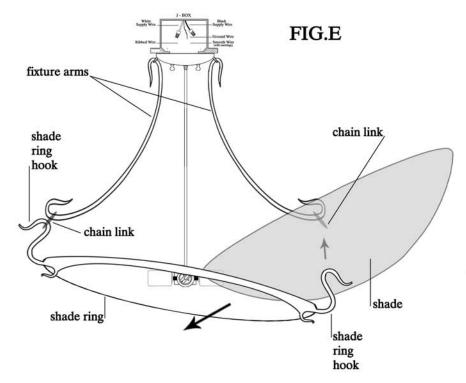

## **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- Refer to FIG.C. Place fixture arms through canopy loop as shown. FIG.C
- 2. Screw crossbar to j-box. FIG.D
- 3. Wire as per local electrical code.
- Place canopy with fixture arms up and onto canopy screws and attach with thumb nuts.FIG.D
- 5. Place chain links onto fixture arms as shown in FIG.E
- Place two shade ring hooks through chain links. (leave one shade ring hook unhooked).FIG.E
- 7. Place shade into shade ring.FIG.E (be sure to hold shade ring secure when placing shade into ring)
- 8. When shade is seated into ring lift shade ring and shade and attach remaining shade ring hook to chain link.FIG.E



"A Commitment to Excellence in Lighting and Service"