
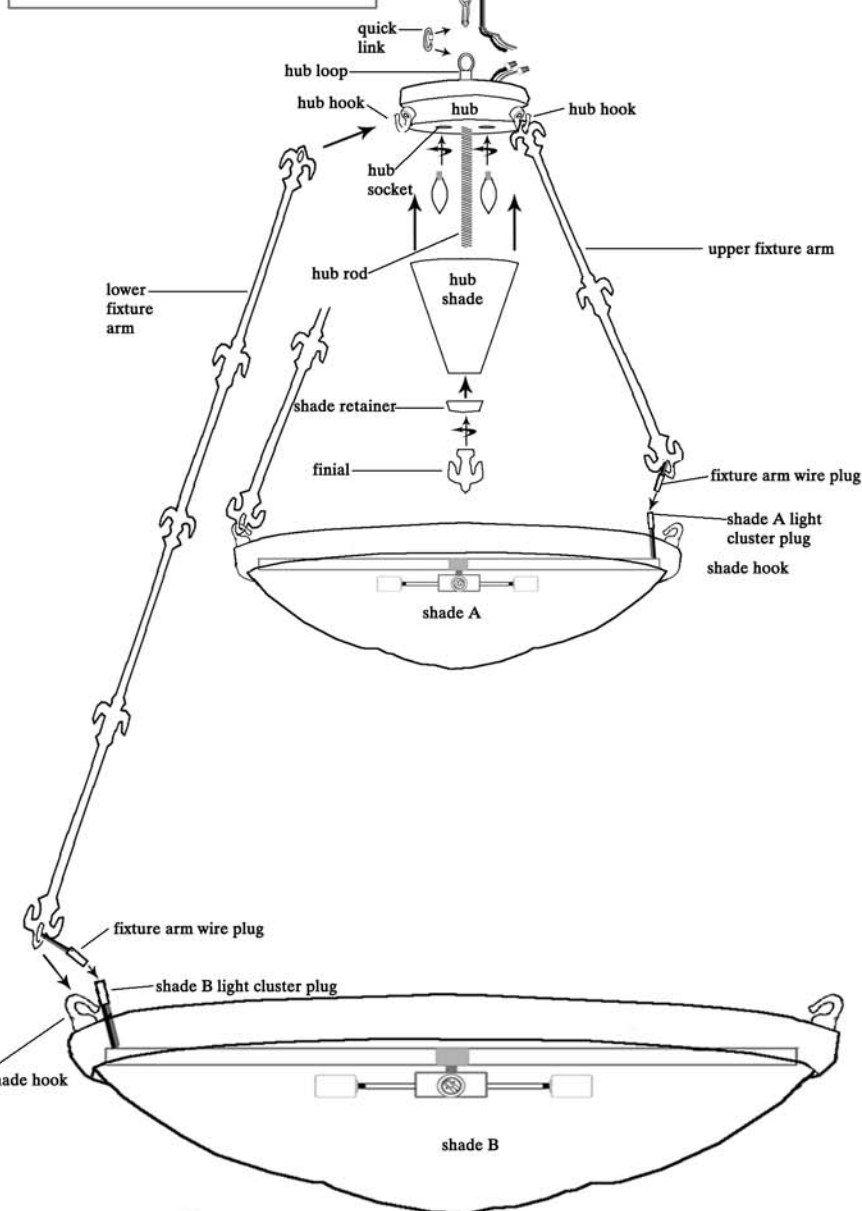
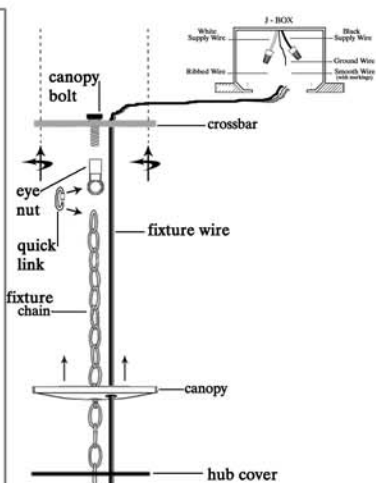


ASSEMBLY INSTRUCTIONS FOR #19833(M125-SG699-24/40-2)

Top view of fixture hub

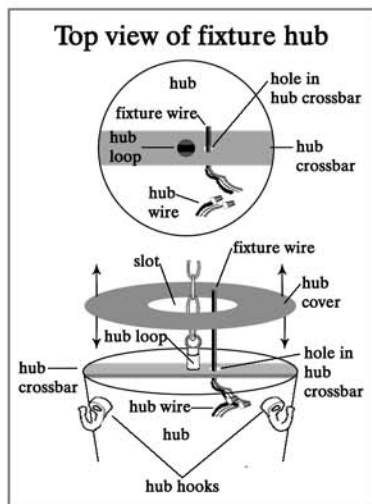

**THIS FIXTURE WEIGHS OVER 220 LBS
THIS IS A 2 PERSON JOB.**

IMPORTANT

**TURN OFF THE POWER AT THE MAIN
FUSE OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION**

**CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE
NOT INCLUDED**

NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

1. Attach crossbar as per local codes.
2. Wire as per local electrical code.
3. Place fixture wire through hole in canopy.
4. Place canopy up and over canopy bolt to ceiling.
5. Screw eye nut onto canopy bolt and tighten to canopy.
6. Attach fixture chain to eye nut with quick link.
7. Weave fixture wire through fixture chain.
8. Attach hub loop to fixture chain with quick link.
9. Slide hub cover up fixture chain place fixture wire through slot in hub cover, place fixture wire through hole in hub crossbar.
10. Wire fixture wires to hub wires with wire nuts, place wired section into hub, slide hub cover down and seat to hub.
11. Screw candelabra bulbs into hub sockets, place hub shade up and over hub rod to hub, place shade retainer onto hub rod to shade, screw finial onto hub rod and tighten to shade retainer.
12. Place upper fixture arms onto hub hooks, place upper fixture arms onto shade A hooks.
13. Plug fixture arm wire plug into shade A light cluster plug.
14. Repeat steps 12 & 13 for shade B.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com