

INSTALLATION INSTRUCTIONS

FOR ITEM 215185 TALL PINES INVERTED PENDANT

Meyda
CUSTOM LIGHTING

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. CHAIN
3. HUB W/STEM & LIGHT CLUSTER
4. ARM (QTY 3)
5. SHADE
6. THREADED ROD & FINIAL ASSEMBLY

Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box. Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

1. Carefully unpack all components and make certain that everything is accounted for.
2. Unscrew Collar from Canopy Assembly to release Mounting Plate with Loop.
3. Affix Mounting Plate to ceiling ensuring that connection is suitable to hold a minimum of 60lbs and that Electrical Supply Wires remain accessible.
4. Attach desired length of Chain to the Hub Loop.
5. Weave Fixture Lead Wires and Safety Cable through every 3rd Link of Chain.
6. Feed each Lead Wire through an outer hole in Canopy.
7. Feed Chain and Safety Cable through Screw Collar and center hole in Canopy.
8. Hang Hub w/ Stem and Light Cluster by connecting loose end of Chain to Mounting Plate Loop.
9. Feed Safety Cable through Channel in Mounting Plate Loop and connect it to secure location ensuring that connection is suitable to hold a minimum of 60lbs.
10. Following all Local Codes and Procedures, make electrical connection from Fixture Lead Wires to Supply Wires.
11. Lift Canopy up to ceiling allowing Mounting Plate Loop to pass through center hole. Secure Canopy by screwing Collar onto Loop.
12. Hang Arms from Hub Loops.
13. Hang Shade from Arms.
14. Feed Threaded Rod with Finial up through center hole in Shade and screw it into Coupling at bottom of Light Cluster.
15. Install 6 Medium Base 50 Watt MR16 Bulbs(not included) into Down Light Sockets.
Install 6 Medium Base 50 Watt MR16 Bulbs(not included) into Angled Up Light Sockets.
Install 6 Medium Base 60 Watt Bulbs(not included) into Horizontal Sockets.
16. Power on and ENJOY!!!

INSTALLATION INSTRUCTIONS

FOR ITEM 215185 TALL PINES INVERTED PENDANT

Meyda
CUSTOM LIGHTING

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*



Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. CHAIN
3. HUB W/STEM & LIGHT CLUSTER
4. ARM (QTY 3)
5. SHADE
6. THREADED ROD & FINIAL ASSEMBLY

Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.
Be sure power is off at the main breaker box prior to installation.
Read all instructions in their entirety before beginning installation.

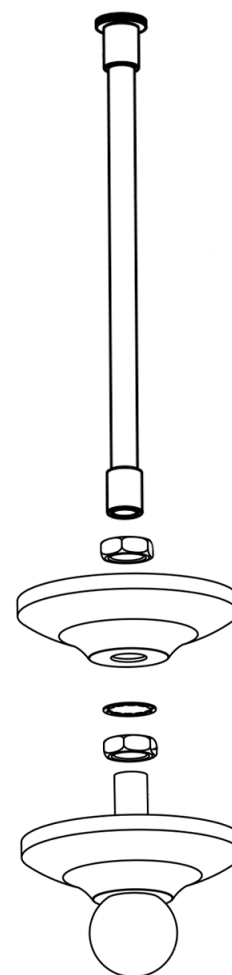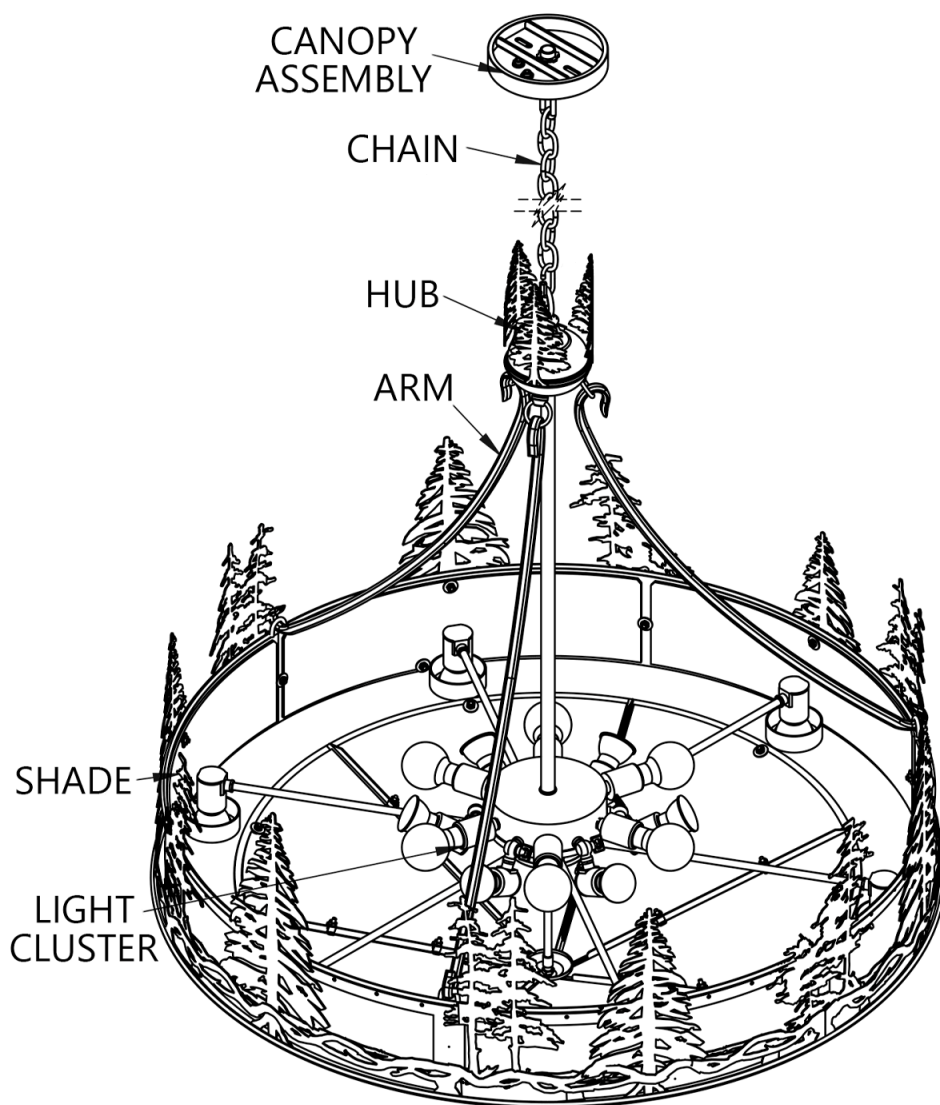

FINIAL ASSEMBLY