


# ASSEMBLY INSTRUCTIONS FOR #23812

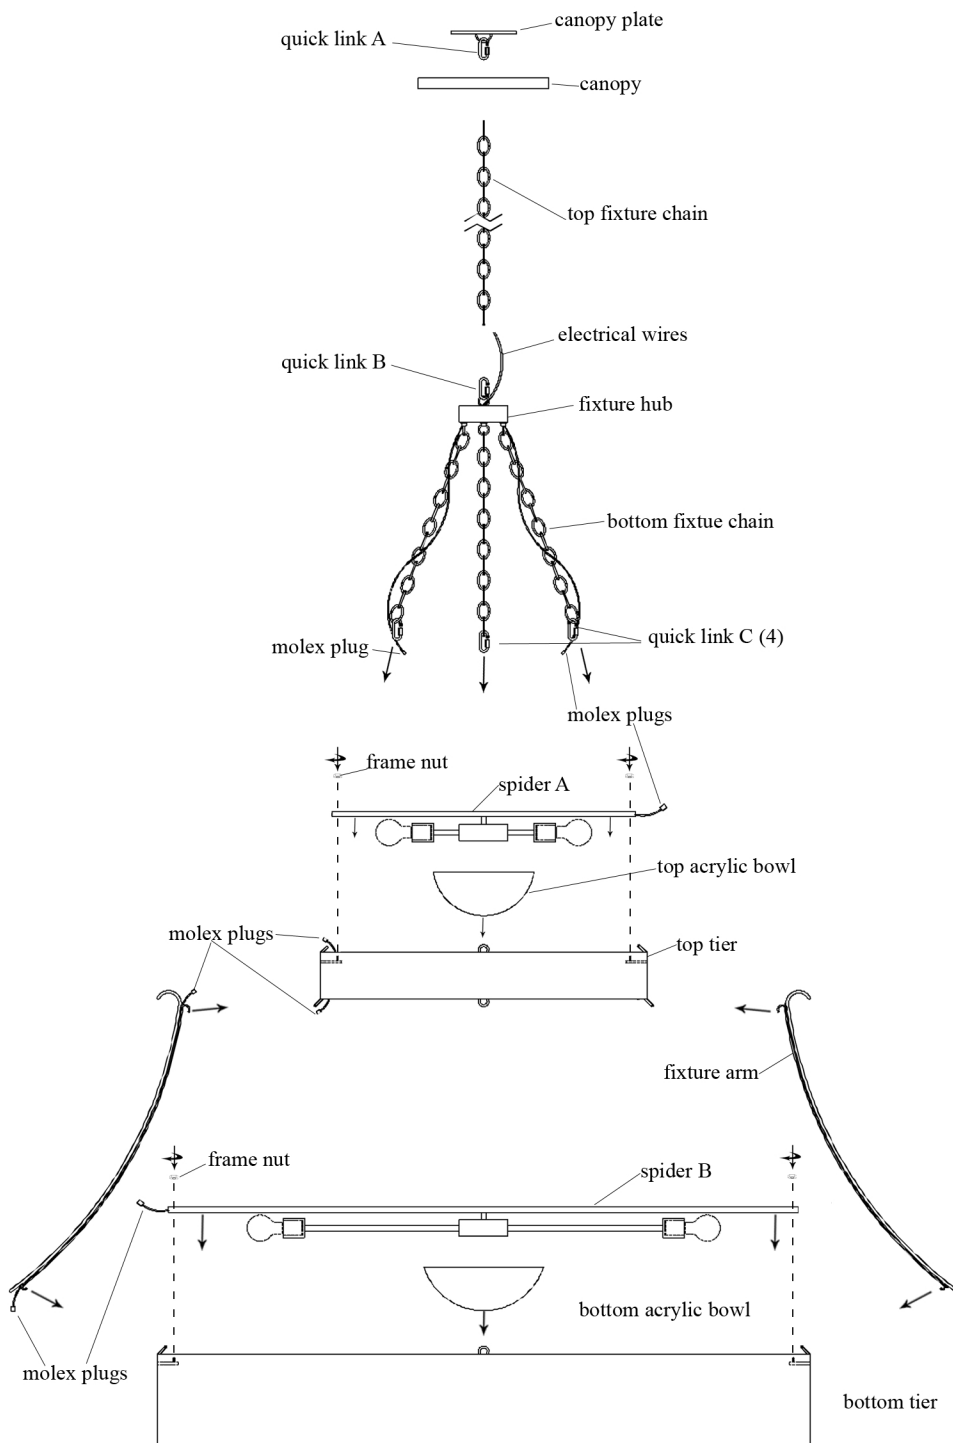

## IMPORTANT

**TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION**

**CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED**

**THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.**

- 1.) Place canopy onto top fixture chain and attach chain to canopy plate using quick link A.
- 2.) Attach fixture hub to top fixture chain using quick link B.
- 3.) Thread electrical wires from fixture hub up top fixture chain, through canopy, and canopy plate.
- 4.) Wire as per local electrical codes.
- 5.) Mount canopy plate to a secure location.
- 6.) Place top acrylic bowl into top tier then attach spider A to top tier using frame nuts provided.
- 7.) Install light bulbs into top tier light cluster.
- 8.) Raise up assembled top tier and attach to bottom fixture chains with quick links C.
- 9.) Connect molex plugs from bottom fixture chains to top tier. (One plug powers spider A lights and the other passes through top tier to power spider B lights)
- 10.) Attach tops of fixture arms to the bottom of top tier and connect all molex plugs.
- 11.) Place bottom acrylic bowl into bottom tier then attach spider B to bottom tier using frame nuts provided.
- 12.) Install light bulbs into bottom tier light cluster.
- 13.) Raise up assembled bottom tier and attach to fixture arms and connect molex plugs.



*"A Commitment to Excellence in Lighting and Service"*

**CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009**

**MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET**

**visit us on the web at [www.meyda.com](http://www.meyda.com)**