

ASSEMBLY INSTRUCTIONS FOR #23951 M55-4 LIGHT

#14794 M34-5 LIGHT


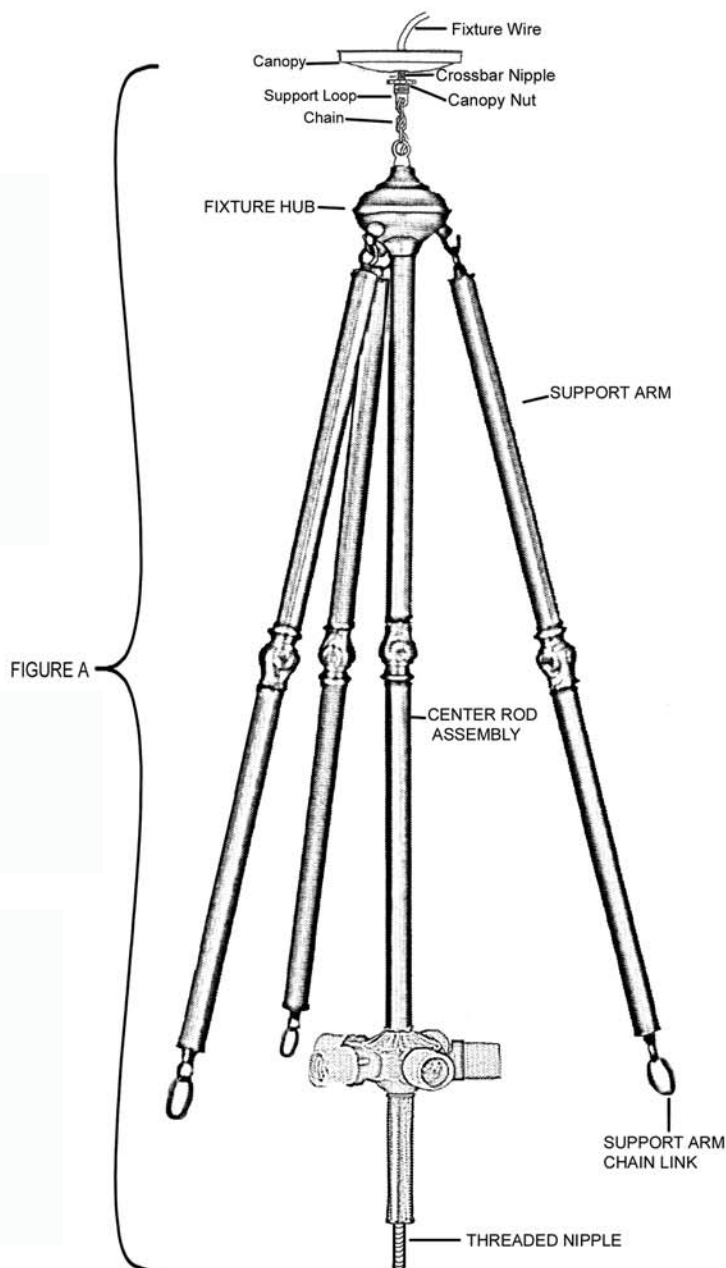


FIGURE B

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

***NOTE:** For M34, this is at a 2+ person job.

1. Assemble fixture as shown in FIG A:
2. Install assembled fixture FIG.A to ceiling. Pull fixture wire through crossbar nipple carefully. (Follow procedure shown in ELECTRICAL CONNECTION instructions.)

3. Place center rod assembly (threaded nipple FIG.A) through hole in center of shade cap (FIG.B). Attach cast metal cap 8851 (FIG.B). Attach finial, Attach 3 support arm chain links (FIG.A) to 3 shade Hooks (FIG.B).

NOTE: Weight of shade must be on center rod assembly ONLY. support arm is for balance of shade only.

4. Screw finial up or down to fine tune tension of arm assembly to assure that weight of shade is supported by center rod.

ELECTRICAL CONNECTIONS:

1. Cut excess wire ABOVE crossbar to 6'. Split the wire into 2 separate leads. Strip 1" of plastic insulator from the ends of each lead.
2. Connect the half of wire w/the ribbed surface to the white wire of the supply box. Connect the smooth half of wire (the half w/markings) to the black wire of the supply box. connect the bare copper Ground wire to the green screw of the crossbar. Use UL listed wire connectors suitable for the size, type and number of conductors. No loose strands or loose connections should be present. Secure wire connectors w/ electrical tape.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com