


ASSEMBLY INSTRUCTIONS FOR # 118681

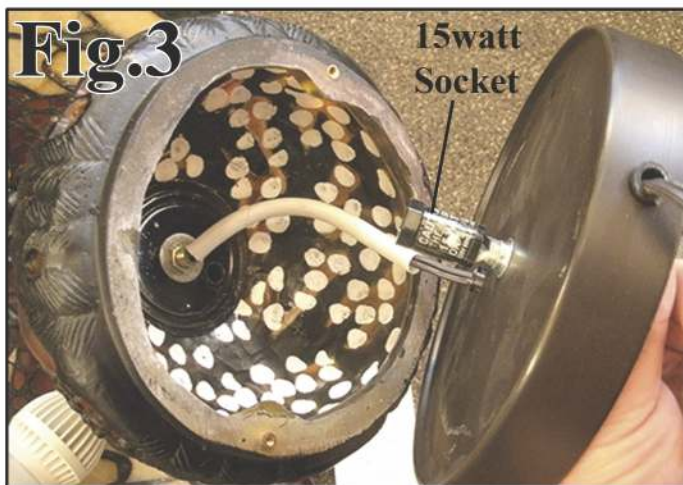

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX BEFORE STARTING
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE NOT
INCLUDED

- 1.) To change the light bulb in base, remove shade, turn base over to access bottom. Remove felt covering the base cover. (Fig.1)
- 2.) Remove the two screws and washers holding base cover to base. (Fig.2)
- 3.) Carefully lift base cover off of base, enough to change/install light bulb. (Bulbs provided by others.) Replace base cover. (Fig.3)
- 4.) Screw the screws through the washers, base cover, and into base. (Fig.2)
- 5.) Apply felt to base cover. Turn base right side up, replace shade. (Fig.1)
- 6.) LED candelabra bulb is recommended to change bulb less.
- 7.) Light base is turned on/off with inline switch. The two light sockets under shade are turned on/off by pull chain, and inline switch. (Fig.4)

Fig.4 (In line switch)



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com