

ASSEMBLY INSTRUCTIONS FOR M49-12 / M49-24

FIGURE C

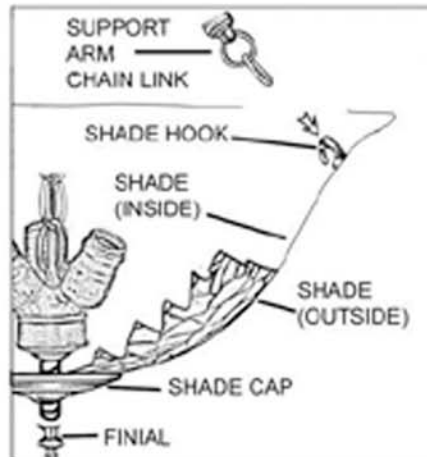


FIGURE A


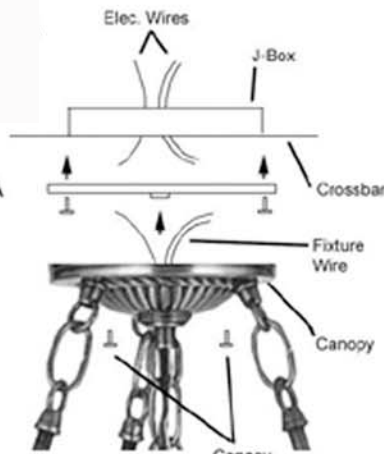


FIGURE B

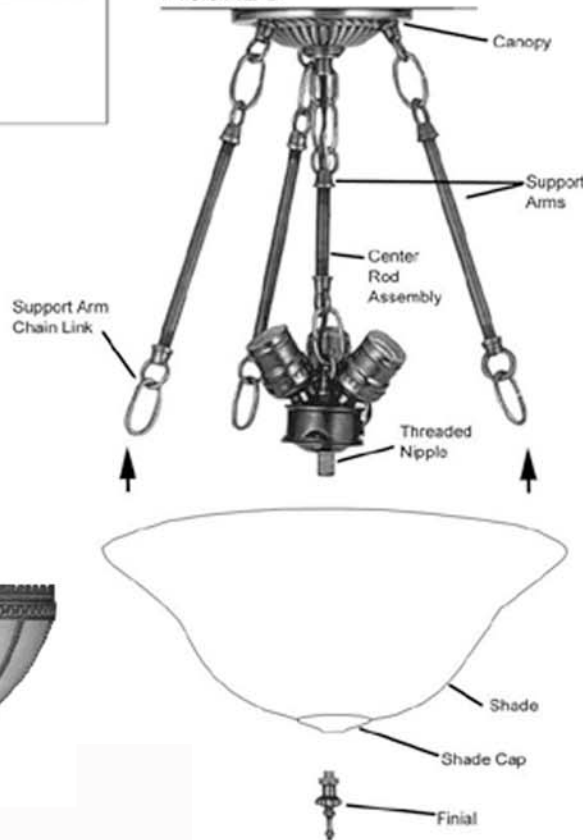

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Attach crossbar to J-Box in ceiling. FIG.A. Attach canopy (w/support arms & center rod assembly) to crossbar w/canopy mounting screws. Attach electrical wires to fixture wires.

* Wire per local codes. Tighten canopy mounting screws.FIG.A

2. Attach support arm(3) chain links to shade hooks. FIG.B & C. Place center rod assembly(threaded nipple) through shade cap. FIG.B & C. Attach finial.

IMPORTANT

Center rod assembly holds weight of shade only. Support arms are used for shade balance only.

4. Finial is used for fine adjustments.

ELECTRICAL CONNECTIONS:

1. Cut excess wire ABOVE crossbar to 6". Split the wire into 2 separate leads. Strip 1" of plastic insulator from the ends of ea. lead.
2. Connect the half of the wire w/ the ribbed surface to the white wire of the supply box. Connect the smooth half of the wire(1/2 w/ the markings) to the black wire of the supply box. Connect the bare copper Ground wire to the green screw of the crossbar. Use UL listed wire connectors suitable for the size, type, and number of conductors. No loose strands or loose connections should be present. Secure wire connectors with electrical tape.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com