

ASSEMBLY INSTRUCTIONS FOR #47611 (SG640-22-1-M94B)

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION


CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Install assembled fixture to ceiling junction box (J-Box).
2. Attach electrical wires as shown in (electrical connections) below.
3. Place leaf cluster on shade as shown.
"place light bulbs in sockets at this time"
4. Attach shade to fixture by placing center rod assembly through hole in shade cap, attach finial to threaded rod and tighten to shade.
5. Remove support rods from fixture hub and attach to shade loops.
6. Attach support rods to fixture hub.

* Weight of shade is supported by finial, adjust finial so support arms balance shade only.*

ELECTRICAL CONNECTIONS:

1. Cut excess wire ABOVE Crossbar to 6 inches. Split the wire into 2 separate leads. Strip one inch of plastic insulator from the ends of each lead.
2. Connect the half of the wire with the ribbed surface to the white wire of the supply box. Connect the smooth half of the wire (the half with the markings) to the black wire of the supply box. Connect the bare copper Ground Wire to the green screw of the crossbar. Use UL listed wire connectors suitable for the size, type, and number of conductors. No loose strands or loose connections should be present. Secure wire connectors with electrical tape.

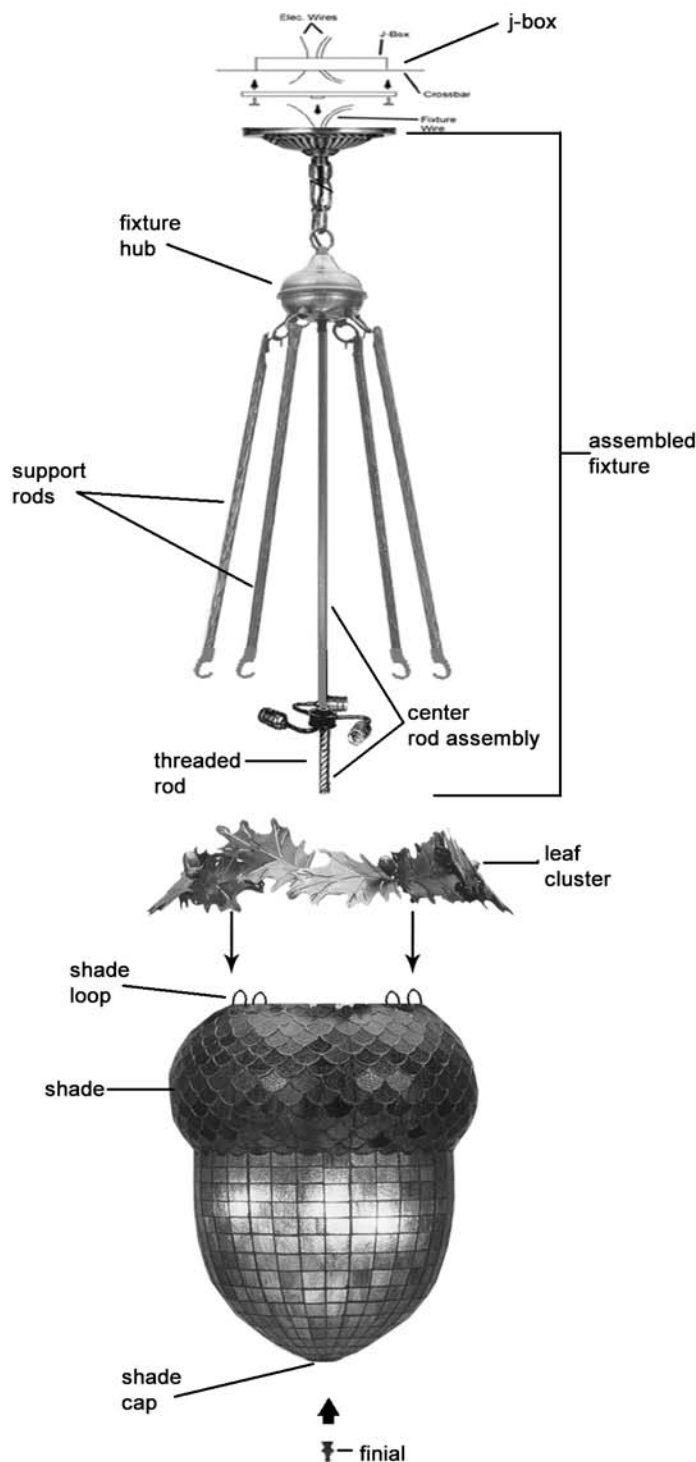

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com