
ASSEMBLY INSTRUCTIONS FOR#132585 (119540)

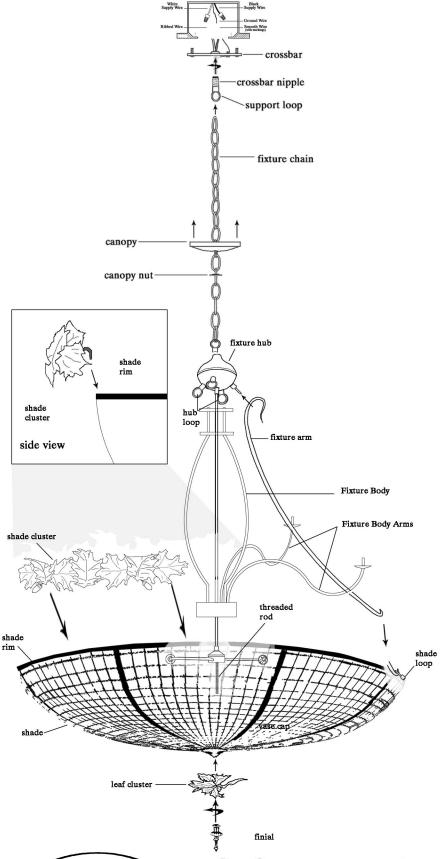

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1. Determine the height the fixture will hang from the ceiling, Adjust height by add/remove links of chain from section of fixture chain ABOVE the fixture hub.
- Screw crossbar to j-box, attach cross-bar nipple to crossbar, screw support loop onto crossbar nipple, attach fixture chain to hub, place canopy nut then canopy onto fixture chain, attach fixture chain to support loop.
- 3. Thread fixture wire through fixture chain using every third or fourth link, wire fixture to j-box wire as per local electrical code.
- 4. Slide canopy up to ceiling, slide canopy nut up and screw onto crossbar nipple, tighten to canopy.
- Inspect fixture body to make sure leaves are in correct postion and fixture arms will fit between fixture body arms.

Some leaves may have been bent out of shape during packing and shipping.

- 6. Place fixture arms onto hub loops.
- 7. Place shade up making sure threaded rod goes through vase cap, attach fixture arms to shade loops.
- 8. Place leaf cluster onto threaded rod, screw finial onto threaded rod and tighten to shade.
- 9. Place shade clusters onto rim of shade.

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET visit us on the web at www.meyda.com