


ASSEMBLY INSTRUCTIONS FOR #81320 (54156-18)

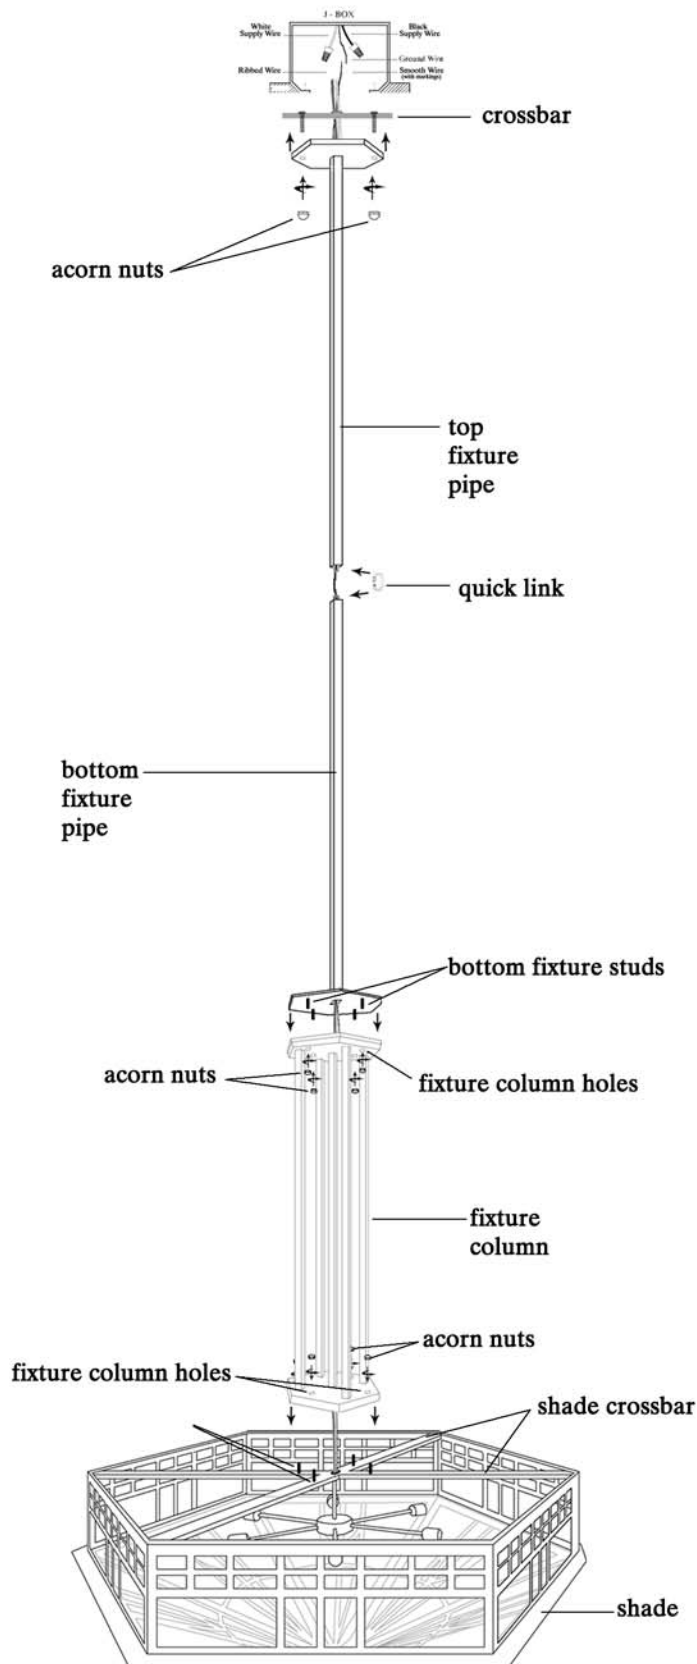

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

1. Place glass panels into shade as marked.
2. Place fixture wire through fixture column.
3. Place fixture column down onto shade crossbar, align fixture column holes with shade crossbar studs and tighten with acorn nuts provided.
4. Place fixture wire through bottom fixture pipe, place bottom fixture pipe onto top of fixture column. Align bottom fixture pipe studs with fixture column holes and tighten with acorn nuts provided.
5. Place fixture wire through top fixture pipe.
6. Attach top fixture pipe to bottom fixture with quick link provided.
7. Attach crossbar to suitable location (refer to third paragraph from top)
8. Wire as per local electrical code.
9. Place fixture up and onto crossbar and secure with acorn nuts provided.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com