


# ASSEMBLY INSTRUCTIONS FOR #98967 (SG640-42-4-M248B)

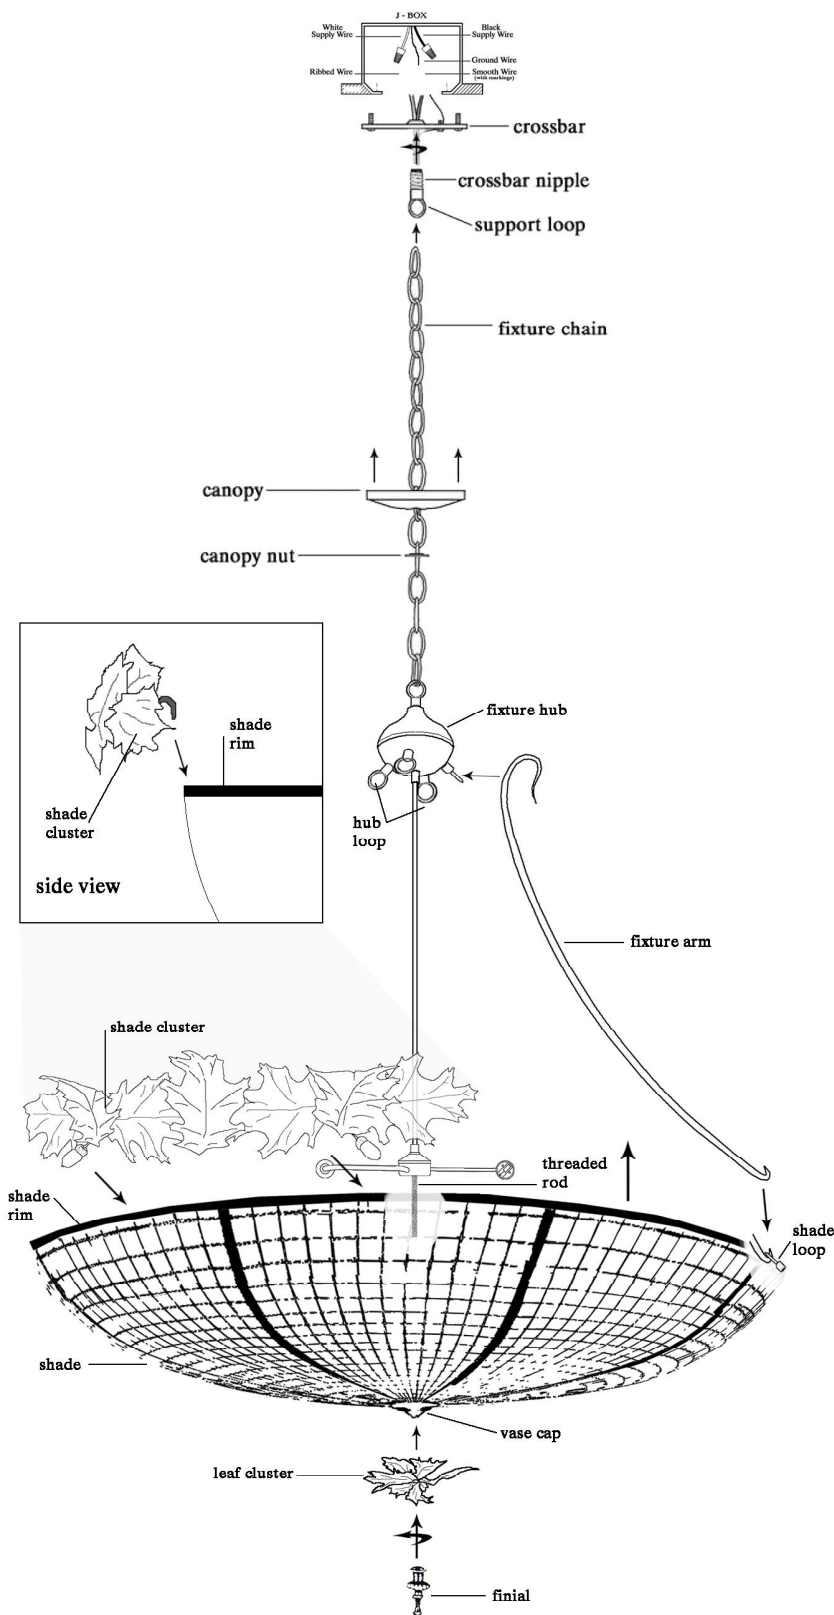

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

1. Determine the height the fixture will hang from the ceiling, Adjust height by add/remove links of chain from section of fixture chain ABOVE the fixture hub.
2. Screw crossbar to j-box, attach crossbar nipple to crossbar, screw support loop onto crossbar nipple, attach fixture chain to hub, place canopy nut than canopy onto fixture chain, attach fixture chain to support loop.
3. Place fixture wire through fixture chain using every third or fourth link, wire fixture to j-box wire as per local electrical code.
4. Slide canopy up to ceiling, slide canopy nut up and screw onto crossbar nipple, tighten to canopy.
5. Place fixture arms onto hub loops.
6. Place shade up making sure threaded rod goes through vase cap, attach fixture arms to shade loops.
7. Place leaf cluster onto threaded rod, screw finial onto threaded rod and tighten to shade.
8. Place shade clusters onto rim if shade.



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)