
ASSEMBLY INSTRUCTIONS FOR #182545



Chain

Canopy Detail

Crossbar
Nipple
Canopy
loop
Chain
Canopy


Screw collar


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach your crossbar to your ceiling or J-Box. The crossbar should have a nipple screwed into it and a canopy loop screwed onto the nipple. (Canopy Detail)
- 2.) Attach the appropriate amount of chain to the fixture loop. (Main Diagram) Place onto the chain the screw collar, and then the canopy. Attach the top of the chain to canopy loop. (Canopy Detail)
- 3.)Run your electrical wires up the length of chain, and through the screw collar, canopy, and then canopy loop/crossbar. Connect electrical wires as per your local electrical code. Slide canopy up the chain followed by the screw collar. Screw the collar onto the canopy loop, thus making the canopy flush to ceiling. (Canopy Detail)
- 4.) Attach crystal: The crystal chain is continuous, separated only by a hook extension. Wrap the hook extension around the nub. Then the rosette's wire is pushed through the nub's hole, (in front of hook extension's wrap. Wrap the rosette (Crystal Detail) Continue around the fixture repeating this process. (Above View) 5.) Bulb your fixture, (bulbs provided by others). Power on, enjoy your new chandelier!

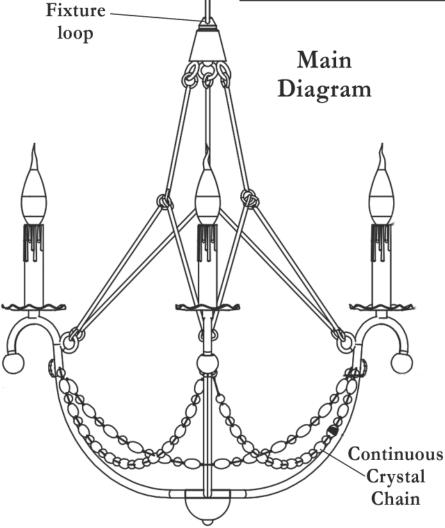





MONDAY - FRIDAY 8:00a.m - 6:00p.m ET visit us on the web at www.meyda.com