


# ASSEMBLY INSTRUCTIONS FOR #125373 (61068-4)

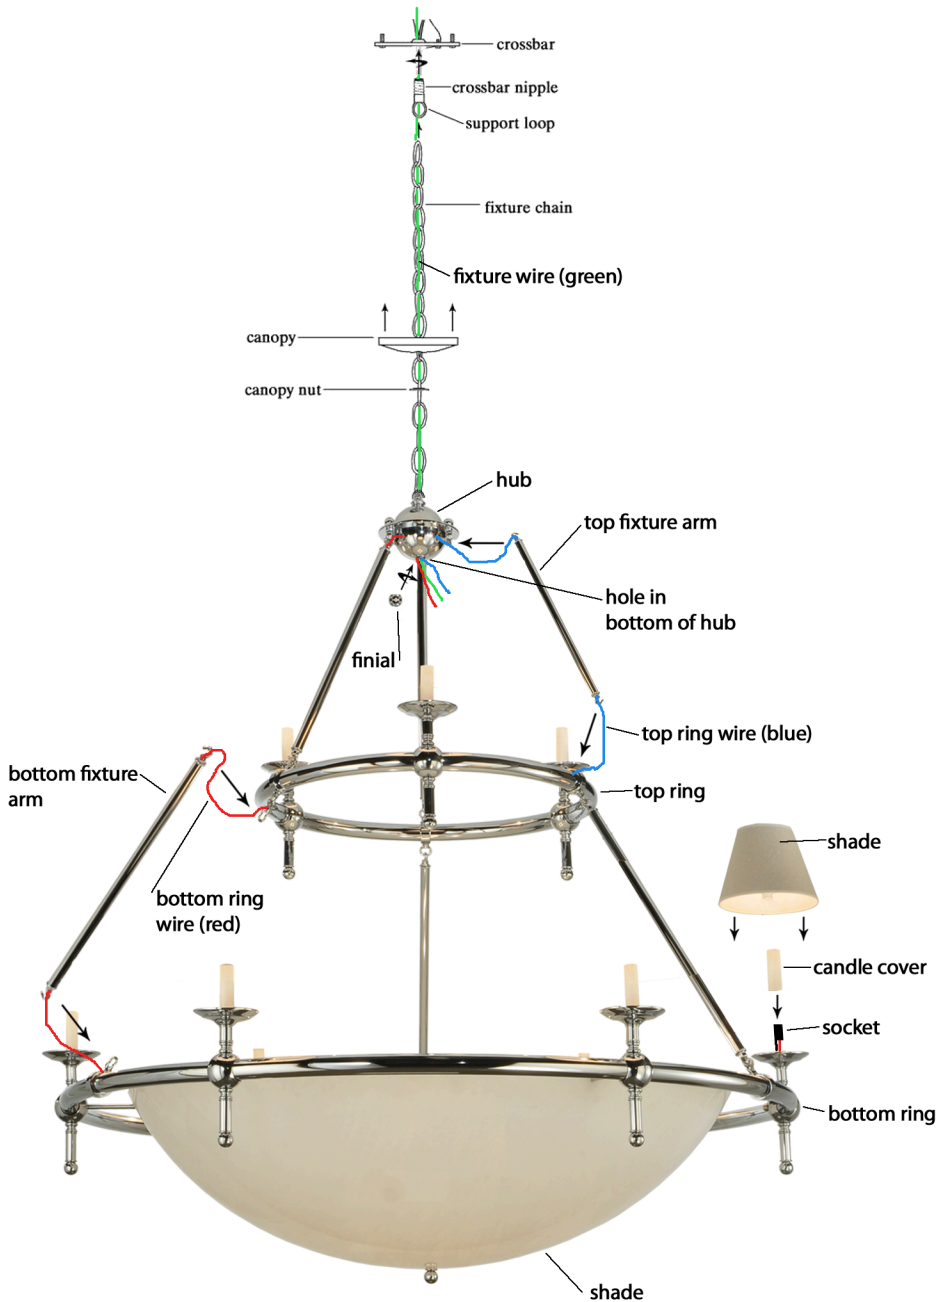

## IMPORTANT

**TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION**

**CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED**

**THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.**

1. Attach crossbar with crossbar nipple and support loop to secure location.
2. Attach fixture chain to hub. Place canopy nut then canopy onto fixture chain. Attach fixture chain to support loop.
3. Remove finial from bottom of hub.
3. Place fixture wire (green) up through fixture chain, crossbar nipple and crossbar, place fixture down through hole in bottom of hub.
5. Attach top fixture arms (short) to hub. Place top ring onto top fixture arms. Place top ring wire (blue) up through top fixture arm into hub and down through hole in bottom of hub.
6. Attach bottom fixture arms (long) to top ring. Attach bottom ring (with shade) to bottom fixture arms. Place bottom ring wire (red) up through bottom fixture arm, top ring and through top fixture arm into hub and down through hole in bottom of hub.
7. Wire green, blue and red wires from bottom of hub together with wire nuts, place into hub and attach finial to bottom of hub.
8. Wire fixture wire (green) as per local electrical code.
9. Slide canopy up to ceiling and secure with canopy nut.
10. Place candle covers and shades onto sockets



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)